

HUMAN VENTILATION AND BREATHING PATTERNS: NORMAL VALUES AND RANGES

David Caretti

Research Physiologist

Edgewood Chemical Biological Center

15 October 2003



Background

- Objectives
 - Define ventilatory parameters based on real-world work rates
 - Examine both non-respirator and respirator conditions
 - Establish flow rates for assessing filter/respirator performance
- Approach
 - Literature review
 - Compile/analyze data from government/non-government sources
 - Human use testing (lab and/or worksite)

Progress

- Literature Search
 - Collected > 100 articles
 - Respirator articles; breathing “resistance” papers
 - Occupational studies; lab investigations
 - Speech ventilation; coughing and sneezing flow rates
 - Article reviews in-progress
- Data Compilation
 - Initial collection of raw flow rate data from ECBC and UMCP; additional sources TBD
 - Current data formatted for analysis
- Human Use Testing
 - Pilot testing of speech flow rates with respirator initiated late September 2003



Workplace
Safety and Health



Occupational Literature Review

| Citation | Test-type | Tasks | Ventilation Rate (L• min ⁻¹) |
|----------------------------------|-----------------------|--|---|
| Kurumatani <i>et. al.</i> (1992) | Worksite | Felling trees | 22.3 – 37.8 |
| Wakui <i>et. al.</i> (2002) | Worksite | Nursing home care (day & night shifts) | 13 (day) 13.8 (night) |
| Gallagher and Hamrick (1992) | Simulated | Lifting of mine materials | 21 – 27 |
| Gunn <i>et. al.</i> (2002) | Simulated | a) Walking b) Sweeping c) Window cleaning d) Vacuuming e) Mowing | a) 26.3 ± 5.3 b) 22.5 ± 4.0 c) 25.0 ± 4.5 d) 19.8 ± 3.5 e) 35.0 ± 5.5 |
| Bridger <i>et. al.</i> (1997) | Simulated | Shoveling sand | 64.1 ± 16.1 63.5 ± 13.6 |
| Hagen <i>et. al.</i> (1993) | Worksite | Motor-manual wood cutting | 42.5 ± 7.5 |
| Smolander <i>et. al.</i> (1995) | Worksite (controlled) | Manual snow clearing | 60.5 ± 11.3 65.8 ± 11.3 |

Occupational Literature Review: Respirator Use

| Citation | Test-type | Respirator | Tasks | Ventilation Rate (L•min ⁻¹) |
|----------------------------------|-------------|---|---------------------------------|---|
| Sothmann <i>et. al.</i> (1992) | Worksite | SCBA | Fire-suppression | 57.0 ± 19.3 |
| Lusa <i>et. al.</i> (1993) | Simulated | SCBA | Smoke-diving (in heat) | 54 ± 10 |
| Louhevaara <i>et. al.</i> (1985) | Worksite(s) | a) Half-mask w/dust filters | a) Building demolition | a) 24 – 48 |
| | | b) Half/full-masks w/dust & gas filters | b) Foundry work | b) 16 – 33 |
| | | c) Air-line (full mask, pressure demand type) | c) Sandblasting | c) 20 – 27.5 |
| | | d) Air-line (half-mask, demand type) | d) Metal spraying | d) 17.5 |
| | | e) SCBA | e) Smog-diving, repair & rescue | e) 45 – 70 |



Workplace
Safety and Health



Laboratory Testing Review: Applied Resistances


| Citation | Test-type | Resistance Condition | Tasks | Ventilation Rate (L• min ⁻¹) |
|---------------------------------|------------------------|---|-------------------------------------|--|
| Jette <i>et al.</i> (1990) | Progressive exercise | APR w/different resistances | Treadmill walk to exhaustion | 101.8 ± 16.3 to 132.7 ± 23.6 |
| Louhevaara <i>et al.</i> (1985) | Progressive exercise | SCBA | Treadmill walk | 19 - 62 |
| Harber <i>et al.</i> (1988) | Constant rate exercise | Single-use acid-mist cartridge | Different intensity treadmill walks | 11.9 ± 2.6 to 53.2 ± 13.7 |
| Lerman <i>et al.</i> (1983) | Constant rate exercise | "Facemask" w/different resistances | Exhaustive run @ 80% of max | 87.4 ± 3.5 to 106.0 ± 4.3 |
| Johnson <i>et al.</i> (1997) | Constant rate exercise | APR w/different resistances | Exhaustive walk @ 85% of max | 49.7 ± 17.6 to 77.65 ± 30.0 |
| Harms <i>et al.</i> (2000) | Constant rate exercise | Mesh screens (3 – 7 cmH ₂ O/L/s) | Exhaustive cycling @ 90% of max | 164.0 ± 6.5 |

Laboratory Testing Review: Applied Resistances

| Citation | Test-type | Resistance Condition | Tasks | Ventilation Rate (L [•] min ⁻¹) |
|---------------------------------|------------------------|---|-------------------------------------|--|
| Jette <i>et al.</i> (1990) | Progressive exercise | APR w/different resistances | Treadmill walk to exhaustion | 101.8 ± 16.3 to 132.7 ± 23.6 |
| Louhevaara <i>et al.</i> (1985) | Progressive exercise | SCBA | Treadmill walk | 19 - 62 |
| Harber <i>et al.</i> (1988) | Constant rate exercise | Single-use acid-mist cartridge | Different intensity treadmill walks | 11.9 ± 2.6 to 53.2 ± 13.7 |
| Lerman <i>et al.</i> (1983) | Constant rate exercise | "Facemask" w/different resistances | Exhaustive run @ 80% of max | 87.4 ± 3.5 to 106.0 ± 4.3 |
| Johnson <i>et al.</i> (1997) | Constant rate exercise | APR w/different resistances | Exhaustive walk @ 85% of max | 49.7 ± 17.6 to 77.65 ± 30.0 |
| Harms <i>et al.</i> (2000) | Constant rate exercise | Mesh screens (3 - 7 cmH ₂ O/L/s) | Exhaustive cycling @ 90% of max | 164.0 ± 6.5 |

PIFR Literature

- PIFR = Peak Inspiratory Flow Rate
- Limited Database
 - PIFR decreases as resistance increases for both constant-rate exercise and rest

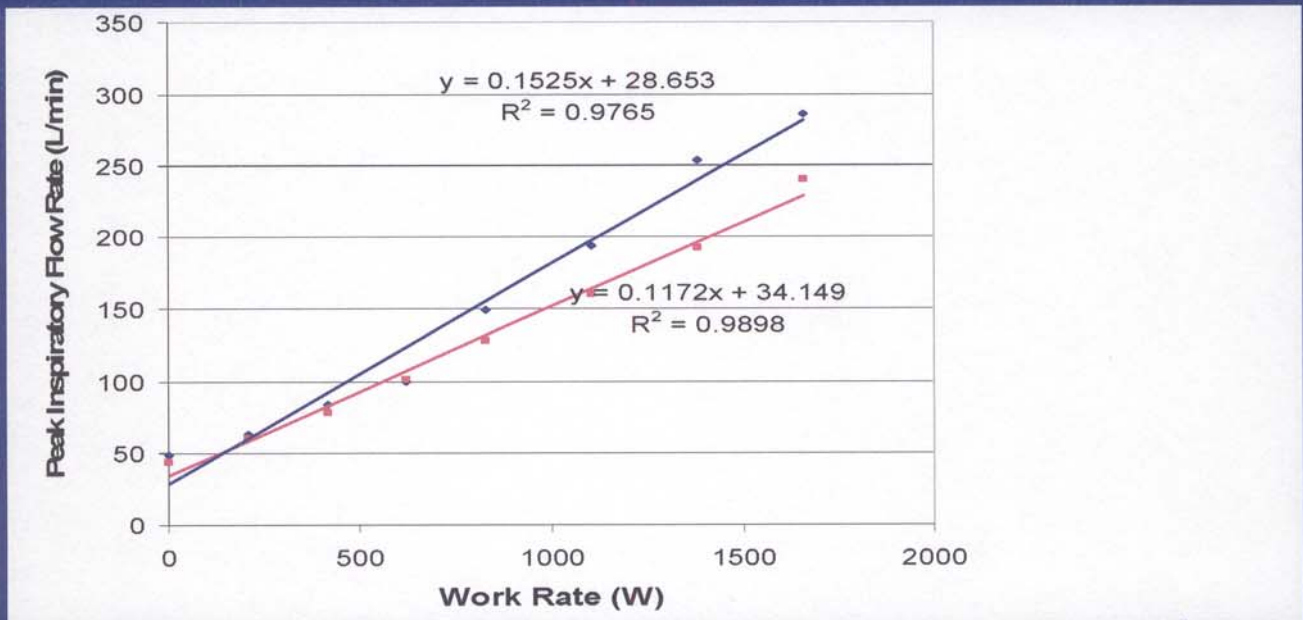

Workplace
Safety and Health



Data Compilation


- UMCP data set - Coyne (2001):
- Breath-by-breath values & minute averages at 5 work rates
 - Inspiratory & expiratory time (T_I , T_E)
 - Tidal volume (V_T)
 - Minute ventilation (V_I & V_E)
 - Respiratory rate (f)
 - Mean inspiratory flow rate (V_T / T_I)
 - Duty cycle (T_I / T_{TOT})
 - Peak inspiratory & expiratory flow rate (PIFR, PEFR)
 - PIFR/ V_I and PEFR/ V_E
- Breathing waveform shapes
- With and without inhalation resistances
- Breath-by-breath variability



Workplace
Safety and Health



Data Compilation

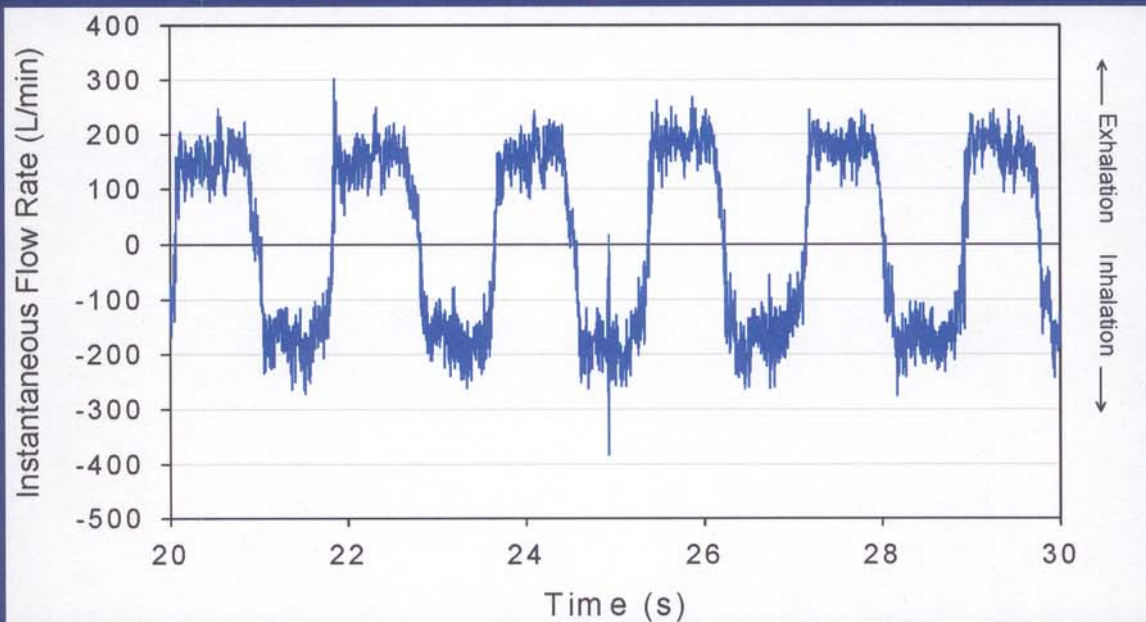

| TI (s) | TE (s) | f (1/min) | VT (L) | VI (L/min) | VT/TI (L/s) | TI/TTOT | PIFR (L/min) | PEFR (L/min) | PIFR/VE | PEFR/VE |
|-----------|-----------|--------------|-----------|---------------|----------------|---------|-----------------|-----------------|---------|---------|
| 0.94 | 0.82 | 34.01 | 2.16 | 73.52 | 2.30 | 0.53 | 271.49 | 302.67 | 3.69 | 4.12 |
| 1.00 | 0.84 | 32.72 | 2.35 | 76.94 | 2.36 | 0.54 | 262.26 | 243.96 | 3.41 | 3.17 |
| 0.89 | 0.82 | 34.93 | 2.16 | 75.45 | 2.42 | 0.52 | 383.51 | 268.75 | 5.08 | 3.56 |
| 0.86 | 0.92 | 33.79 | 2.42 | 81.92 | 2.82 | 0.48 | 263.58 | 245.27 | 3.22 | 2.99 |
| 0.89 | 0.89 | 33.57 | 2.43 | 81.58 | 2.72 | 0.50 | 275.44 | 245.27 | 3.38 | 3.01 |

Project Milestones

- Complete literature review Oct 03
- Provide flow rates for NIOSH sponsored high flow filter testing Nov 03
- Draft report of literature review Jan 04
- Develop/implement data-gap testing Jan 04
- Complete compiled data analysis Mar 04
- Final flow rate recommendations Aug 04



Workplace
Safety and Health

