



## ORAU TEAM Dose Reconstruction Project for NIOSH

Oak Ridge Associated Universities | Dade Moeller & Associates | MJW Corporation

Page 1 of 122

<p>Document Title: <b>Rocky Flats Plant – Occupational Internal Dose</b></p>	<p>Document Number: ORAUT-TKBS-0011-5  Revision: 01  Effective Date: 02/01/2007  Type of Document: TBD  Supersedes: Revision 00</p>
<p>Subject Expert(s): Roger B. Falk</p> <p>Site Expert(s): N/A</p>	
<p>Approval: <u>Signature on File</u> Robert Meyer, Document Owner</p>	<p>Approval Date: <u>01/25/2007</u></p>
<p>Approval: <u>Signature on File</u> John M. Byrne, Task 3 Manager</p>	<p>Approval Date: <u>01/19/2007</u></p>
<p>Concurrence: <u>Signature on File</u> Edward F. Maher, Task 5 Manager</p>	<p>Concurrence Date: <u>01/18/2007</u></p>
<p>Concurrence: <u>Signature on File</u> James P. Griffin, Deputy Project Director</p>	<p>Concurrence Date: <u>01/25/2007</u></p>
<p>Approval: <u>Brant A. Ulsh Signature on File for</u> James W. Neton, Associate Director for Science</p>	<p>Approval Date: <u>02/01/2007</u></p>

New   
 Total Rewrite   
 Revision   
 Page Change

**FOR DOCUMENTS MARKED AS A TOTAL REWRITE, REVISION, OR PAGE CHANGE, REPLACE THE PRIOR REVISION AND DISCARD / DESTROY ALL COPIES OF THE PRIOR REVISION.**

### PUBLICATION RECORD

EFFECTIVE DATE	REVISION NUMBER	DESCRIPTION
01/12/2004	00	New document to establish technical basis document for the Rocky Flats Plant - occupational internal dose. First approved issue. Initiated by Robert Meyer.
12/13/2005	00 PC-1	Approved page change revision initiated to incorporate recent direction from NIOSH to include DOL review comments on page 7 in Section 5.1. Change made to Table 5.3.1.4.2-2 on page 17 in Section 5.3. No sections were deleted. Retraining is not required. Initiated by Robert Meyer.
02/01/2007	01	Approved Revision 01 revised to reflect current introductory material. Revised in response to Union comments. Change made to Table 5-9. Constitutes a total rewrite of document. This revision addresses Worker Outreach comments as described in CT-0201, CT-0206, and CT-0207. Revised to incorporate attribution, per ORAU request. The Worker Outreach comments from the June 23, 2004, meeting of the United Steelworkers of America Local 8031 and Rocky Flats Security Officers Local Union 1 are addressed in Section 5.3.2 and 5.4.2 regarding internal organ counts; Sections 5.2.1.2, 5.2.2.2, 5.2.3.2., and 5.2.4.2 regarding particle size and that as many reports as possible have been reviewed in the writing of this section. The Worker Outreach comments from the June 23, 2004, meeting of Colorado State Building and Construction Trades regarding whole-body counting are addressed in Sections 5.3.2 and 5.2.4. Incorporates internal and NIOSH formal review comments. This revision results no change to the assigned dose and no PER is required. Training required: As determined by Task Manager. Initiated by Robert Meyer.

## TABLE OF CONTENTS

<u>SECTION</u>	<u>TITLE</u>	<u>PAGE</u>
	Acronyms and Abbreviations .....	7
5.1	Introduction.....	9
5.1.1	Purpose.....	10
5.1.2	Scope.....	10
5.2	Source Term.....	10
5.2.1	Plutonium .....	10
5.2.1.1	Isotopic Composition .....	10
5.2.1.2	Plutonium Solubility and Particle Size.....	11
5.2.2	Americium .....	12
5.2.2.1	Isotopic Composition .....	12
5.2.2.2	Americium Solubility and Particle Size.....	12
5.2.3	Enriched Uranium.....	12
5.2.3.1	Isotopic Composition .....	12
5.2.3.2	Enriched Uranium Solubility and Particle Size .....	13
5.2.4	Depleted Uranium.....	13
5.2.4.1	Isotopic Composition .....	13
5.2.4.2	Depleted Uranium Solubility and Particle Size .....	13
5.3	Bioassay Data .....	13
5.3.1	Urinalysis Data .....	14
5.3.1.1	Plutonium Urinalysis .....	14
5.3.1.2	Americium Urinalysis .....	16
5.3.1.3	Enriched Uranium Urinalysis .....	17
5.3.1.4	Depleted Uranium Urinalysis .....	18
5.3.1.5	Gross Alpha Urinalysis .....	20
5.3.1.6	Tritium .....	20
5.3.2	Lung Count Data .....	21
5.3.2.1	Americium/Plutonium.....	21
5.3.2.2	Thorium/Depleted Uranium.....	24
5.3.3	Other Bioassay Data .....	25
5.3.3.1	Wound Count Data.....	25
5.3.3.2	Nasal Smears and Fecal Samples.....	26
5.4	Records and Reports.....	26
5.4.1	Urinalysis Records and Reports .....	27
5.4.1.1	Interpretation of the Urinalysis Record Card .....	27
5.4.1.2	Interpretation of the Health Sciences Data System – Urinalysis Detail Report .....	27
5.4.1.3	Interpretation of Other Urinalysis Reports.....	28
5.4.2	Lung Count Records and Reports .....	30
5.5	Attributions and Annotations.....	33
	References .....	48

Glossary .....	51
Attachment A, Minimum Detectable Activity for Urinalysis Methods at Rocky Flats	
A.1 Introduction.....	54
A.2 MDA Methodology .....	54
A.3 History of Methods.....	55
A.4 Assessment of MDA .....	61
A.5 MDA Values .....	66
A.6 Discussion .....	73
A.7 Acknowledgments .....	73
Attachment B, Minimum Detectable Activity for <i>In Vivo</i> Lung Counts at Rocky Flats	
B.1 Introduction .....	75
B.2 MDA Methodology .....	75
B.3 History of Counting Systems and Procedures.....	76
B.4 Assessment of MDA .....	79
B.5 Values of the Variables, 1969 – for NaI(Tl) and Phoswich Detector Systems .....	81
B.6 Values of the Variables, 1976 – for Ortec Germanium Detector Systems .....	82
B.7 Values of the Variables, 1978 – for PGT I Germanium Detector Systems .....	84
B.8 Values of the Variables, 1979 – for PGT II Germanium Detector Systems .....	85
B.9 Values of the Variables, 1985 – for PGT Organ Pipe Germanium Detector Systems.....	86
B.10 Values of the Variables, 1985 – for EG&G Organ Pipe Germanium Detector Systems.....	87
B.11 MDA for RFP Plutonium .....	88
Attachment C, Examples of Bioassay Data Records and Reports .....	92

## LIST OF TABLES

<u>TABLE</u>	<u>TITLE</u>	<u>PAGE</u>
5-1	Weight percent and fraction of alpha activity for weapons-grade plutonium .....	11
5-2	Weight percent and fraction of alpha activity for ZPPR plutonium .....	11
5-3	Weight percent and fraction of alpha activity for enriched uranium.....	12
5-4	Weight percent and fraction of alpha activity for depleted uranium.....	13
5-5	Median MDA values for plutonium.....	16
5-6	Median MDA values for americium.....	17
5-7	Median MDAs for enriched uranium .....	18
5-8	Median MDAs for depleted uranium from 1952 to April 1964 .....	19
5-9	Median MDAs for depleted uranium from May 1964 to the present .....	19
5-10	Median MDAs for gross alpha measurements.....	20
5-11	Summary of MDAs for <sup>241</sup> Am.....	23
A-1	Method codes .....	55
A-2	Correlation of method code and analyte.....	56
A-3	Values of tolerance and reporting levels.....	56
A-4	Sample volumes for routine 24-hour urine samples.....	61
A-5	Detector background for gas flow proportional counters.....	62
A-6	Median and 95th-percentile blank count rates .....	62
A-7	Efficiencies of alpha counting detectors .....	63
A-8	Recoveries used in MDA assessments .....	64
A-9	Fraction of alphas absorbed in residue.....	65
A-10	Gross alpha calibration factor.....	66
A-11	Values of variables and MDA for plutonium for median conditions .....	66
A-12	Values of variables and MDA for plutonium for extreme conditions .....	66
A-13	MDA for plutonium for one, two or three extreme conditions .....	67
A-14	Values of variables and MDA for EU for median conditions.....	67
A-15	Values of variables and MDA for EU for extreme conditions .....	68
A-16	MDA for EU for one, two, or three extreme conditions.....	68
A-17	Values of variables and MDA for fluorimetric measures of DU for median and extreme conditions.....	69
A-18	Values of variables and MDA for americium for median conditions .....	69
A-19	Values of variables and MDA for americium for extreme conditions .....	70
A-20	Values of the MDA for americium for one, two, or three extreme conditions.....	70
A-21	Values of variables and MDA for gross alpha measurements for median conditions .....	71
A-22	Values of variables and MDA for gross alpha measurements for extreme conditions.....	71
A-23	Values of the MDA for gross alpha measurements for one, two, or three extreme conditions.....	71
B-1	Discontinuity factors .....	80
B-2	Calibration factors for the Ortec germanium detector system .....	83
B-3	Calibration factors for the PGT I germanium detector system .....	85
B-4	Calibration factors for the PGT II germanium detector system .....	86
B-5	Values of variables for the PGT organ pipe germanium detector system .....	86
B-6	Calibration factors for the PGT organ pipe germanium detector system.....	87
B-7	Values of variables for the EG&G organ pipe germanium detector system .....	87
B-8	Calibration factors for the EG&G organ pipe germanium detector system.....	87
B-9	MDA conversion factors for values of ppm <sup>241</sup> Am.....	88
B-10	Americium ingrowth in RFP plutonium.....	89
B-11	Americium MDA for <i>in vivo</i> lung counts at RFP .....	90

## LIST OF FIGURES

<u>FIGURE</u>	<u>TITLE</u>	<u>PAGE</u>
C-1	Urinalysis Record Card and Health Sciences Data System – Urinalysis Detail (1) (first activity date on the HSDS portion: 10-29-54) .....	93
C-2	Urinalysis Record Card and Health Sciences Data System – Urinalysis Detail (2) (first activity date on the HSDS portion 8-19-53) .....	94
C-3	Urinalysis Record Card and Health Sciences Data System – Urinalysis Detail (3) (first activity date on the HSDS portion: 1-6-58) .....	95
C-4	Health Sciences Data System – Urinalysis Detail (1) (first activity date 9-17-58).....	96
C-5	Health Sciences Data System – Urinalysis Detail (2) (first activity date 3-19-73).....	97
C-6	Analytical Report – Bioassay Analysis Data 3-15-93.....	98
C-7	Analytical Report – Bioassay Analysis Data 10-28-93.....	99
C-8	Form 1 – Sample Results 1-29-96.....	100
C-9	Rocky Flats Environmental Technology Site (1) 8-27-96 (analytes: <sup>238</sup> U, <sup>235</sup> U, <sup>234</sup> U).....	101
C-10	Rocky Flats Environmental Technology Site (1) 8-8-96 (analyte: <sup>239</sup> Pu) .....	102
C-11	Form 1 – Sample Results – Quanterra, Richland 7-31-98 .....	103
C-12	General Engineering Laboratories, Inc. 6-28-99.....	104
C-13	Health Sciences Urinalysis Record (with tritium, fecal, and nasal smear results) .....	105
C-14	Health Physics – Body Counter Information 12-8-65 .....	106
C-15	Health Physics – Body Counter Information 5-16-68.....	107
C-16	Health Physics – Body Counter Information 8-26-68.....	108
C-17	Health Physics – Body Counter Information 9-16-70.....	109
C-18	Radiation Dosimetry – Body Count Results 10-3-74.....	110
C-19	Radiation Dosimetry – Body Count Results 5-30-75.....	111
C-20	Radiation Dosimetry – Body Count Results 1-9-78.....	112
C-21	Body Counter Results 12-8-81 .....	113
C-22	Radiation Dose Assessment – Body Count Results 7-22-83 .....	114
C-23	Radiation Dose Assessment – Body Count Results 5-18-83 .....	115
C-24	Radiation Dose Assessment – Body Count Results 2-21-84 .....	116
C-25	Radiation Dose Assessment – Body Count Results 3-22-84 .....	117
C-26	Radiation Dose Assessment – Body Count Results 10-10-85 .....	118
C-27	Radiation Dose Assessment – Body Count Results 3-6-89 .....	119
C-28	Internal Dosimetry – Lung Count Results 11-23-93.....	120
C-29	ABACOS-Plus 3-6-96.....	121
C-30	ABACOS-Plus 11-15-01.....	122
C-31	ABACOS-Plus 6-14-01.....	123

**ACRONYMS AND ABBREVIATIONS**

AMAD	activity median aerodynamic diameter
cm	centimeter
cpm	counts per minute
CWT	chest wall thickness
d	day
DOE	U.S. Department of Energy
dpm	disintegrations per minute
DQO	data quality objective
DTPA	diethylenetriaminepentaacetate
DU	depleted uranium
EDTA	ethylenediaminetetraacetate
EEOICPA	Energy Employees Occupational Illness Compensation Program Act of 2000
EU	enriched uranium
g	gram
hr	hour
HSDS	Health Sciences Data System
ICRP	International Commission on Radiological Protection
IMBA	Integrated Modules for Bioassay Analysis (computer program)
in.	inch
keV	kilovolts-electron, 1,000 electron volts
L	liter
LLNL	Lawrence Livermore National Laboratory
MDA	minimum detectable activity
mg	milligram
min	minute
mL	milliliter
MLT	minutes live time
mm	millimeter
mo	month
MPLB	maximum permissible lung burden
nCi	nanocurie
NIOSH	National Institute for Occupational Safety and Health
pCi	picocurie
PGT	Princeton Gamma Tech
PHA	pulse height analysis
ppm	parts per million
POC	probability of causation

QA	Quality Assurance
RCG	radioactive concentration guide
RFP	Rocky Flats Plant
RFETS	Rocky Flats Environmental Technology Site
ROI	region of interest
s	second
TBD	technical basis document
TBP	tributyl phosphate
TOPO	trioxyl phosphene oxide
TTA	thenoyl trifluoro acetone
U.S.C.	United States Code
WG	weapons-grade
yr	year
ZPPR	Zero Power Physics Reactor
μCi	microcurie
μg	microgram
μm	micrometer
§	section or sections

## 5.1 INTRODUCTION

Technical basis documents and site profile documents are not official determinations made by the National Institute for Occupational Safety and Health (NIOSH) but are rather general working documents that provide historic background information and guidance to assist in the preparation of dose reconstructions for particular sites or categories of sites. The documents will be revised in the event additional relevant information is obtained about the affected site(s). These documents may be used to assist NIOSH staff in the completion of the individual work required for each dose reconstruction.

In this document the word “facility” is used as a general term for an area, building, or group of buildings that served a specific purpose at a site. It does not necessarily connote an “atomic weapons employer facility” or a “Department of Energy [DOE] facility” as defined in the Energy Employees Occupational Illness Compensation Program Act [EEOICPA; 42 U.S.C. § 7384l(5) and (12)]. EEOICPA defines a DOE facility as “any building, structure, or premise, including the grounds upon which such building, structure, or premise is located ... in which operations are, or have been, conducted by, or on behalf of, the Department of Energy (except for buildings, structures, premises, grounds, or operations ... pertaining to the Naval Nuclear Propulsion Program)” [42 U.S.C. § 7384l(12)]. Accordingly, except for the exclusion for the Naval Nuclear Propulsion Program noted above, any facility that performs or performed DOE operations of any nature whatsoever is a DOE facility encompassed by EEOICPA.

For employees of DOE or its contractors with cancer, the DOE facility definition only determines eligibility for a dose reconstruction, which is a prerequisite to a compensation decision (except for members of the Special Exposure Cohort). The compensation decision for cancer claimants is based on a section of the statute entitled “Exposure in the Performance of Duty.” That provision [42 U.S.C. § 7384n(b)] says that an individual with cancer “shall be determined to have sustained that cancer in the performance of duty for purposes of the compensation program if, and only if, the cancer ... was at least as likely as not related to employment at the facility [where the employee worked], as determined in accordance with the POC [probability of causation<sup>1</sup>] guidelines established under subsection (c) ...” [42 U.S.C. § 7384n(b)]. Neither the statute nor the probability of causation guidelines (nor the dose reconstruction regulation) define “performance of duty” for DOE employees with a covered cancer or restrict the “duty” to nuclear weapons work.

As noted above, the statute includes a definition of a DOE facility that excludes “buildings, structures, premises, grounds, or operations covered by Executive Order No. 12344, dated February 1, 1982 (42 U.S.C. 7158 note), pertaining to the Naval Nuclear Propulsion Program” [42 U.S.C. § 7384l(12)]. While this definition contains an exclusion with respect to the Naval Nuclear Propulsion Program, the section of EEOICPA that deals with the compensation decision for covered employees with cancer [i.e., 42 U.S.C. § 7384n(b), entitled “Exposure in the Performance of Duty”] does not contain such an exclusion. Therefore, the statute requires NIOSH to include all occupationally derived radiation exposures at covered facilities in its dose reconstructions for employees at DOE facilities, including radiation exposures related to the Naval Nuclear Propulsion Program. As a result, all internal and external dosimetry monitoring results are considered valid for use in dose reconstruction. No efforts are made to determine the eligibility of any fraction of total measured exposure for inclusion in dose reconstruction. NIOSH, however, does not consider the following exposures to be occupationally derived:

---

<sup>1</sup> The U.S. Department of Labor is ultimately responsible under the EEOICPA for determining the POC.

- Radiation from naturally occurring radon present in conventional structures
- Radiation from diagnostic X-rays received in the treatment of work-related injuries

### 5.1.1 **Purpose**

This TBD discusses Rocky Flats Plant (RFP) internal dosimetry data for dose reconstruction and includes guidance for the appropriate use of that information.

### 5.1.2 **Scope**

Workers at RFP had the potential to receive intakes of plutonium, americium, enriched uranium (EU), depleted uranium (DU), and tritium, as well as miscellaneous other radionuclides (Daugherty et al. 2001). Section 5.2 describes the available source term information including isotopic composition, solubility, and particle size. Site-specific internal dosimetry information for other radionuclides such as thorium, curium, and neptunium, is rare or not available.

The primary modes of intake would have been chronic or acute inhalation or through breaks in the skin (wounds). The primary bioassay data are the urine data (the activity of the radionuclide of interest that is excreted in the urine following an inhalation or wound intake) and the lung count data (the activity of the radionuclide present in the lungs after an inhalation intake) [1]. Section 5.3 discusses these two data sets in detail including the history, sensitivity, and pertinent nuances of the methods and data.

The internal exposure record for a worker consists of records of the bioassay data and reports of involvement in incidents, accidents, or special situations. Section 5.4 describes samples of these records and reports with explanations of the aspects important to dosimetry.

Attributions and annotations, indicated by bracketed callouts and used to identify the source, justification, or clarification of the associated information, are presented in Section 5.5.

## 5.2 **SOURCE TERM**

### 5.2.1 **Plutonium**

#### 5.2.1.1 Isotopic Composition

Three aspects of the isotopic composition of plutonium are important to internal dose reconstruction:

1. The percent by weight of  $^{241}\text{Pu}$ , which is needed to calculate the ingrowth of  $^{241}\text{Am}$  for the lung count data,
2. The fraction of the activity for each alpha-emitting plutonium isotope, which is needed to account for the dose contributed by unmeasured isotopes,
3. The ratio of the activity of  $^{241}\text{Pu}$  to the alpha activity of the other plutonium isotopes, which is needed to calculate the intake of  $^{241}\text{Pu}$  from intakes from bioassay data for  $^{239}\text{Pu}$  and  $^{240}\text{Pu}$ .

For weapons-grade (WG) plutonium, which was present at RFP throughout most of its 1952-to-1989 production history, the ratio of the activity of  $^{241}\text{Pu}$  to the alpha activity of the other plutonium isotopes is 5.1, and the  $^{240}\text{Pu}$  content is about 6% by weight. Table 5-1 lists the weight percent and fraction of alpha activity for each isotope.

The Zero Power Physics Reactor (ZPPR) special project in the mid-1960s involved reactor-grade plutonium. The ratio of the activity of <sup>241</sup>Pu to the alpha activity of the other plutonium isotopes is 32. Table 5-2 lists the weight percent and alpha activity fraction for each isotope. Reports of accidents or incidents involving ZPPR plutonium generally note “ZPPR” or “ZPPR material,” especially on the lung count reports [2].

Table 5-1. Weight percent and fraction of alpha activity for weapons-grade plutonium.<sup>a</sup>

Isotope	Weight percent	Fraction of alpha activity
Pu-238	0.01	0.023
Pu-239	93.79	0.8
Pu-240	5.8	0.18
Pu-241	0.36 <sup>b</sup>	–
Pu-242	0.03	Negligible

- a. Source: *Final Environmental Impact Statement, Rocky Flats Plant Site* (DOE 1980, Volume 1, Table 2.7.2-2, p. 2-170). Values are the average for RFP plutonium from July 1976 to July 1, 1978. This isotopic composition is also typical of plutonium metal processed at RFP to 1990 (James 1990).
- b. The percent by weight of <sup>241</sup>Pu for 1959 to 1977 was 0.49, with a range of 0.35 to 0.65 (RFETS 2002, p. 5.1).

Table 5-2. Weight percent and fraction of alpha activity for ZPPR plutonium.<sup>a</sup>

Isotope	Weight percent	Fraction of alpha activity
Pu-239	87.6	0.7
Pu-240	10.0	0.3
Pu-241	2.4	–

- a. These ZPPR values are based on extracted data in a working file from an undocumented source.

The dose reconstruction should account for the activity of <sup>241</sup>Am in the plutonium mixture. The concentration of the <sup>241</sup>Am is variable depending on the time since the plutonium was purified and whether the mixture involves waste or byproduct (separated <sup>241</sup>Am) from the purification of aged plutonium. Starting in 1969, parts per million of <sup>241</sup>Am were measured for the plutonium mixture involved in significant possible inhalation incidents and were generally recorded on lung count reports for workers involved in those incidents. A nominal amount, 100 or 1,000 ppm by mass, of <sup>241</sup>Am should be assumed if no other data are available. The value of 100 ppm <sup>241</sup>Am should be considered for workers likely exposed to purified plutonium, such as workers involved in chemical, process, or metallurgical operations in Buildings 771, 776, 777, and 707. If the plutonium intake for WG plutonium is assessed for <sup>239,240</sup>Pu, the activity of <sup>241</sup>Am in the intake mixture is calculated by multiplying the <sup>239,240</sup>Pu activity by  $[48.2 \times \text{ppm } ^{241}\text{Am} \div (1 \times 10^6 - \text{ppm } ^{241}\text{Am})]$ . For ZPPR plutonium, the <sup>239,240</sup>Pu activity is multiplied by  $[44.6 \times \text{ppm } ^{241}\text{Am} \div (1 \times 10^6 - \text{ppm } ^{241}\text{Am})]$  to obtain the activity of <sup>241</sup>Am in the intake mixture [3].

#### 5.2.1.2 Plutonium Solubility and Particle Size

Most plutonium in metalworking operations and involved in fires is insoluble (i.e., type S). Exceptions such as plutonium metal associated with solvents such as carbon tetrachloride, can be assumed to be more soluble (type M) if this is what the data show or if it is more favorable to claimants to do so [4].

The plutonium fire on October 15, 1965, in Buildings 776 and 777, is a special case. The plutonium, which was strongly retained in the lungs of exposed workers with relatively low transfer to the urine, exhibited highly insoluble (super type S) characteristics [5].

Plutonium in chemical processing operations can be either soluble (type M), insoluble (type S), or a mixture of solubilities. The dose reconstructor should select the material type that is most favorable to the claimant [6]. Lung count data in conjunction with urine data can help to determine absorption type.

In general, particle size and distributions are not available for work areas or incidents at RFP. Therefore, dose reconstructions should use the default value of 5- $\mu$ m activity median aerodynamic diameter (AMAD) (NIOSH 2002).

One exception is the plutonium fire on October 15, 1965, in Buildings 776 and 777 (Falk 2004), for which Mann and Kirchner (1967) measured a mass median diameter of 0.3  $\mu$ m (1- $\mu$ m AMAD) with a geometric deviation of 1.83. An approach that is favorable to claimants is to assume 1- $\mu$ m AMAD for all plutonium fires unless the qualifying cancer involves the tissues of the extrathoracic regions [7].

## 5.2.2 Americium

### 5.2.2.1 Isotopic Composition

For the NIOSH Dose Reconstruction Project, the measured americium is  $^{241}\text{Am}$  [8].

### 5.2.2.2 Americium Solubility and Particle Size

Americium was present in two forms at RFP, as a purified byproduct of plutonium recovery and as atoms formed by the nuclear transformation of  $^{241}\text{Pu}$  and embedded in the matrix of the plutonium particle. As a purified byproduct, International Commission on Radiological Protection (ICRP) Publication 68 specifies americium inhalation absorption as type M (ICRP 1994a, p. 83). For embedded atoms in the matrix of an inhaled plutonium particle, the dose reconstructor should use the solubility classification described for the plutonium particle in Section 5.2.1.2 (ICRP 1994b, p. 79).

The dose reconstructor should use the default 5- $\mu$ m AMAD particle size (NIOSH 2002) except for situations involving fires, where a 1- $\mu$ m AMAD should be assumed for consistency with Section 5.2.1.2 above.

## 5.2.3 Enriched Uranium

### 5.2.3.1 Isotopic Composition

Production at RFP involved EU from 1952 to 1963. Table 5-3 lists the weight percent and fraction of alpha activity for each isotope.

Table 5-3. Weight percent and fraction of alpha activity for enriched uranium.<sup>a</sup>

Isotope	Weight percent	Fraction of alpha activity
U-234	1.	0.97
U-235	93	0.031
U-236	0.39	0.0039
U-238	5.4	0.00028

a. Source: DOE (1980, Volume 1, Table 2.7.2-4, p. 2-172).

### 5.2.3.2 Enriched Uranium Solubility and Particle Size

Operations for EU paralleled those for plutonium and included chemical processing and metalworking. Compounds of uranium are generally more soluble than those of plutonium, and solubility classification is uncertain. The ICRP assigns  $UO_2(NO_3)_2$  (uranyl nitrate) to inhalation type F; compounds  $UO_3$  (yellow cake),  $UF_4$ , and  $UCl_4$  to inhalation type M; and compounds  $UO_2$  and  $U_3O_8$  to inhalation type S (ICRP 1979, 1994b,c). All of these compounds were involved in the recovery and recycle processes for EU in Building 881 (RFETS 2000a).

In many cases, the compound of uranium involved in an intake is not identified. Dose reconstructors should use the solubility classification that is most favorable to claimants.

If site-specific data for particle size of uranium are not available, dose reconstructors should use the default particle size value of 5- $\mu$ m AMAD (NIOSH 2002).

## 5.2.4 Depleted Uranium

### 5.2.4.1 Isotopic Composition

DU was present at RFP throughout its production history. Uranium-238 accounts for the majority of DU internal dose, but the total uranium alpha activity should be included in the dose reconstruction (see Table 5-4).

Table 5-4. Weight percent and fraction of alpha activity for depleted uranium.<sup>a</sup>

Isotope	Weight percent	Fraction of alpha activity
U-234	0.00058	0.097
U-235	0.23	0.013
U-238	99.77	0.89

a. These values are derived from data in DOE (1980, Volume 1, Table 2.7.2-4, p. 2-172).

### 5.2.4.2 Depleted Uranium Solubility and Particle Size

Operations with DU involved metalworking including casting, forming, and melting. Likely compounds are  $UO_3$  and  $U_3O_8$  (RFETS 2000a). The solubility classification is ambiguous, falling somewhere between type S and type M (RFETS 1998a, Section 6.1; HPS 1995; Lawrence 1984). Dose reconstructors should use the solubility classification that is most favorable to claimants.

If site-specific data for particle size of uranium are not available, dose reconstructors should use the default particle size value of 5- $\mu$ m AMAD (NIOSH 2002).

## 5.3 BIOASSAY DATA

The primary data for intake assessment at RFP are the urinalysis data and the lung count data. Other bioassay data, such as wound count data, fecal sample data, and nasal smear data, were obtained in special situations but generally were not used to quantify intakes [9].

### 5.3.1 Urinalysis Data

Attachment A, Minimum Detectable Activity for Urinalysis Methods at RFP, discusses the history of the methods, reporting and recording levels, and sensitivities of the methods as they evolved and were implemented at RFP. The following material summarizes, supplements, and expands the information in Attachment A.

#### 5.3.1.1 Plutonium Urinalysis

##### 5.3.1.1.1 Methods, Units, Isotopes, and Interferences

Through 1989, the units of the results are disintegrations per minute per a 24-hr excretion period. After 1989, the units of the results are disintegrations per minute per sample regardless of the sample volume or excretion period. Spot urine samples for plutonium were rarely requested and were usually associated with a significant incident, especially an incident with chelation (DTPA) treatment followup. Assume a 24-hr excretion period unless the record indicates that the actual excretion period was different [10].

Through 1977, samples were counted using an air proportional detector system that did not have sufficient resolution to separate the alpha energies for the plutonium alpha-emitting isotopes. Starting in 1973, an alpha pulse height analysis (PHA) system with surface barrier detectors was phased in and had completely replaced the air proportional detector system by 1978. The plutonium urine results provided by the air proportional detector system include activity from  $^{238}\text{Pu}$ ,  $^{239}\text{Pu}$ , and  $^{240}\text{Pu}$ . Plutonium urine results for samples counted by the PHA system include only  $^{239}\text{Pu}$  and  $^{240}\text{Pu}$  results. Intake assessments are simpler and more favorable to claimants if the dose reconstructor assumes  $^{239}\text{Pu}$  and  $^{240}\text{Pu}$  for all plutonium urine results unless the worker was involved in a special situation involving pure  $^{238}\text{Pu}$ . If the intake is assessed using  $^{239}\text{Pu}$  and  $^{240}\text{Pu}$  data, the  $^{238}\text{Pu}$  component of the intake is obtained by multiplying the  $^{239}\text{Pu}$  and  $^{240}\text{Pu}$  intake by 0.0235 [11].

Interferences were likely in the period from 1952 to 1962 because of a lack of specificity of the chemical procedure to isolate only the plutonium in the extract. Plutonium results would likely include some americium and thorium activity. In addition, for gross alpha analyses assigned to plutonium through 1973, the result could include some contribution from uranium. However, it is favorable to claimants to disregard such interferences and take the plutonium results at face value unless a value can be determined to be an outlier [12].

From 1963 to 1977, the ion exchange method significantly reduced interferences from americium, uranium, and thorium. As the PHA system was phased in starting in 1973, the possibility of interferences was further reduced. After 1977, these interferences were not a significant issue for plutonium urine results because all samples were counted on the PHA system [13].

Another source of interference was contamination of the tracer ( $^{236}\text{Pu}$  or  $^{242}\text{Pu}$ ) by the analyte isotopes,  $^{239}\text{Pu}$  and  $^{240}\text{Pu}$ , which was an infrequent occurrence [14].

Chelation (EDTA or DTPA) treatments cause enhanced excretion of plutonium in the urine. Urine data from within 90 d of a chelation injection have historically been excluded from calculations of intakes or depositions of plutonium. Information in the medical or dosimetry records should allow the dose reconstructor to discern chelation treatments, which generally followed a significant and documented incident. In the urine data reports for the Health Sciences Data System (HSDS), urine data affected by chelation were flagged with a code 1. Code 1 was also used to flag urine data that

did not pass quality standards. The dose reconstructor should be wary of any urine result flagged with a code 1 and in general should not use these data in dose reconstruction [15].

#### 5.3.1.1.2 Plutonium Reporting Levels, Minimum Detectable Activities, and Uncertainties

The minimum reporting level for plutonium through 1961 was 0.88 dpm/24-hr sample (this was 10% of the RFP tolerance level). For 1962 to April 6, 1970, the minimum reporting level was 0.2 dpm/24-hr sample. Results less than the reporting level were reported as 0.00 dpm/24-hr sample on computer-generated reports, such as the HSDS (see Attachment C, Figures C-3 and C-4) or background (or some abbreviation; e.g., BK) when manually recorded on the Urinalysis Record Card (see Figure C-3). For some workers, results initially reported as background on the Urinalysis Record Card were superseded by the report of the actual result in reports of the HSDS, if the actual result was  $\geq 0.00$  dpm/24-hr sample. After April 6, 1970, all results  $\geq 0.00$  dpm/24-hr sample were reported. Negative results were reported as 0.00 dpm/24-hr sample through 1989. After 1989, the actual negative value was reported. Starting in approximately 1990, urine results were not normalized to a 24-hr sample. Instead, the results are disintegrations per minute per sample regardless of the sample volume [16].

The minimum detectable activity (MDA) for plutonium is presented here for the median conditions. By definition of the median value, half of the sample-specific MDAs are lower than the median value, and half are higher. In most cases the dose reconstructor is not likely to have sufficient data to determine the sample-specific MDA, so the median values should be used [17].

Table 5-5 lists the MDA values for plutonium. The values for 1952 to 1977 are based on examination of urinalysis data logs for 1952 to 1971 (see Attachment A). The MDA value for 1971 was extrapolated through 1977. The MDA value for 1978 to 1989 is based on matrix blank data (RFETS 1992) for the routine plutonium urinalysis program for August 1, 1990, to September 27, 1991, using blank values with a sample-specific recovery in the range of 0.1 to 1.1 dpm/24-hr sample. This range of recoveries mimics the range used from 1978 to 1989 for a valid analysis of routine samples. For 1990 to 1992, the blank values with a sample-specific recovery in the range from 0.35 to 1.1 dpm/24-hr sample were used to determine the MDA value. For 1993 to the present, the value of the MDA is equal to the sample-specific MDA of 0.02 dpm/sample contractually required in the Rocky Flats Environmental Technology Site (RFETS) bioassay statement of work (RFETS 1998b) for any laboratory processing the sample, although the required MDA was not consistently achieved by the onsite laboratory [18]. Note that the value of the sample-specific MDA is included in the urinalysis data reports starting in 1990.

Some urine samples could have been processed by an offsite commercial laboratory before 1993. The reports for those samples might have the sample-specific MDAs. If these are not available, the MDA listed in Table 5-5 should be used [19].

Some periods contain transitions that improved the detection of plutonium. For example, from 1964 to 1977, electrodeposition of the plutonium replaced evaporation of the extract on the planchet. In addition, starting in 1973 with four detectors, plutonium samples were processed with an internal standard and were counted on a PHA system to establish the sample-specific recovery. The count time was also increased to 720 min. Because of the difficulty of determining which improvements apply to each sample, the MDAs in Table 5-5 do not account for the improvement until the transition was completed for all samples (i.e., the MDAs are favorable to claimants).

Table 5-5. Median MDA values for plutonium.<sup>a,b</sup>

Period	dpm/24-hr sample
1952–1953	0.57 <sup>c</sup>
1954–1962	0.51 <sup>c</sup>
1963	0.44
1964–1977	0.54
1978–1989	0.24
1990–1992	0.24
1993–present	0.02

- The unit of the MDA values starting in 1990 is dpm/sample.
- Sample-specific MDA values, if found in the record starting in 1990, should be used instead of the generic MDA values in this table.
- Note that these values of MDA are lower than the reporting level of 0.88 dpm/24-hr sample used at RFP through 1961. Many urine results in this period were re-reported with the actual value if greater than zero. For those re-reported results, these MDA values apply instead of the original reporting level.

The uncertainty of the result was not quantified and reported in the record until approximately 1980. The reported value was the 2-sigma standard error and included only uncertainties of counting statistics, adjusted by the sample-specific recovery. Starting in approximately 1986, contributions from other sources of uncertainty were included, and the reported value was the 1-sigma standard error [20]. To estimate the uncertainty for results without a reported uncertainty, a reasonable approach is to divide the median MDA value by 3.3, where 3.3 is the sum of  $k_{\alpha}$  and  $k_{\beta}$ , and  $k_{\alpha} = k_{\beta} = 1.645$  (see Attachment A).

### 5.3.1.2 Americium Urinalysis

#### 5.3.1.2.1 Methods, Units, Isotopes, and Interferences

Attachment A describes the methods through 1971. After 1971, the method for <sup>241</sup>Am paralleled that for plutonium.

The units of the results are disintegrations per minute per a 24-hr excretion period through 1989. After 1989, the units of the results are disintegrations per minute per sample regardless of the sample volume or excretion period [21].

The main interference is thorium, specifically <sup>228</sup>Th, which has two alphas with energies similar to those of <sup>241</sup>Am and has chemical properties similar to those of americium. If the chemical extraction procedure for americium was not run precisely, thorium would be eluted from the ion exchange column with the americium. When the extract was counted, even with the PHA system, the <sup>228</sup>Th could not be distinguished from the <sup>241</sup>Am [22].

The plutonium-to-amerium alpha activity ratio (<sup>239,240</sup>Pu dpm/24-hr sample divided by <sup>241</sup>Am dpm/24-hr sample) for paired plutonium and americium urine results provides a credibility check. An alpha activity ratio less than 2 (corresponding to a parts-per-million value for <sup>241</sup>Am of 10,000 or greater) is not credible unless the worker was involved with (1) separated <sup>241</sup>Am (Line 1 in Building 771), (2) the molten salt process in Building 776, (3) research and development projects involving pure americium, (4) material from the ZPPR project, or (5) waste identified for those operations [23].

The dose reconstructor should use the plutonium urine data instead of the <sup>241</sup>Am urine data to assess intakes of WG plutonium [24]. The intake of the <sup>241</sup>Am is then calculated from the value of the initial parts per million of <sup>241</sup>Am measured or assumed for the plutonium mixture involved in the intake.

#### 5.3.1.2.2 Americium Reporting Levels, Minimum Detectable Activities, and Uncertainties

The reporting levels for americium were ≥0.24 dpm/24 hr in 1963, ≥0.2 dpm/24 hr from 1964 to 1967, and ≥0.30 dpm/24 hr from 1968 to 1971. Results less than the reporting level were reported as zero or background (or some abbreviation; e.g., BK). The reporting practice for the period from 1972 to 1976 has not been determined. Unless it is determined, dose reconstructors should assume that the reporting level for 1968 to 1971 was continued through 1976 [25]. Starting in 1977, all results ≥0.00 dpm/24-hr sample were reported. Negative results were reported as zero through 1989. After 1989, the actual negative value was reported. As for plutonium, urine results were not normalized to a 24-hr sample starting in about 1990. Instead, the results are dpm/sample, regardless of the sample volume [21].

The MDAs for americium (Table 5-6) were determined as described for plutonium (see Section 5.5.1.1.2 and Attachment A), with the difference that the americium analyses started in 1963.

Table 5-6. Median MDA values for americium.<sup>a,b</sup>

Period	dpm/24-hr sample
1963	0.44
1964–1965	0.55
1965–1970	0.46
1971–1977	0.76
1978–1989	0.31
1990–1992	0.3
1993–present	0.02

- a. The unit of the MDA values starting in 1990 is dpm/sample.
- b. Sample-specific MDA values, if found in the record starting in 1990, should be used instead of the generic MDA values in this table.

The discussions of MDA and uncertainty for plutonium urinalysis in Section 5.3.1.1.2 apply to americium urinalysis.

#### 5.3.1.3 Enriched Uranium Urinalysis

##### 5.3.1.3.1 Methods, Units, Isotopes, and Interferences

The units of the results are disintegrations per minute per a 24-hr excretion period for the entire period.

Since urine samples analyzed for EU were counted with the air proportional detectors, all of the alpha-emitting isotopes of uranium are included in the result.

Site-specific information about possible interferences that might have occurred for the urinalysis methods for EU is not available.

It is favorable to claimants to assume that the result is all EU [26].

### 5.3.1.3.2 EU Reporting Levels, Minimum Detectable Activities, and Uncertainties

Table 5-7 lists the MDAs for EU. The reporting level for EU through 1963 was  $\geq 8.8$  dpm/24-hr sample (10% of the RFP tolerance level). From 1964 to 1971, the minimum reporting level ranged from 20 to 28 dpm/24-hr sample, depending on the volume of the sample, as observed from the urinalysis data logs for that period. Results less than the reporting level were reported as zero or background (or some abbreviation; e.g., BK). It is undetermined when urinalysis for EU was stopped at RFP, although the stoppage likely occurred in the early 1970s [27].

Table 5-7. Median MDAs for enriched uranium.

Period	dpm/24-hr sample
1952–1953	14
1954–1959	13
1960–1963	9.4
1964–1969	31
1970–1971	25

The MDAs for EU were determined as described for plutonium (see Section 5.3.1.1.2 and Attachment A).

Uncertainties for the EU urine results have not been quantified or reported. To estimate the uncertainty for results without a reported uncertainty, a reasonable approach is to divide the median MDA value by 3.3, where 3.3 is the sum of  $k_\alpha$  and  $k_\beta$ , and  $k_\alpha = k_\beta = 1.645$  (see Attachment A).

### 5.3.1.4 Depleted Uranium Urinalysis

#### 5.3.1.4.1 Methods, Units, Isotopes, and Interferences

Attachment A describes the uranium urinalysis methods through 1971. From 1972 to 1979, DU samples were chemically processed with the uranium-specific trioxyl phosphene oxide (TOPO) extraction procedure, and the extract (electrodeposited) was counted on the gas flow proportional counter. From 1980 to 1997, DU samples were processed with a tracer ( $^{232}\text{U}$  or  $^{236}\text{U}$ ) by ion exchange and alpha-counted with the alpha spectrometry system with surface barrier detectors in vacuum. The starting year of use of the tracer has not been determined. From 1997 to the present, DU samples have been processed at an offsite commercial laboratory according to provisions of the bioassay statement of work (RFETS 1998b).

The units for 1952 to April 1964 are micrograms of uranium per 24-hr excretion period. The mass measurement is for all the isotopes of uranium. From May 1964 to 1989, the units are dpm/24-hr sample. After 1989, the units of the results are dpm/sample, regardless of the sample volume or excretion period [28].

The urine data logs through 1971 do not identify the isotopes involved. However, it is reasonable to assume that all the alpha-emitting uranium isotopes were included in the air proportional detector measurements. For the 1980s, the logs have not been reviewed sufficiently to determine which isotopes were included in addition to  $^{238}\text{U}$ , which contributes 89% of the alpha activity. It is favorable to claimants to assume that the reported urine result pertains only to  $^{238}\text{U}$  and to determine additional intakes for the other isotopes [29]. In the 1990s, the urine data reports include the results separately for  $^{234}\text{U}$ ,  $^{235}\text{U}$ , and  $^{238}\text{U}$ .

The major interference is the contribution from natural uranium, which is ubiquitous, sometimes in concentrated pockets, in the terrain near RFP. No adjustments have been made to the reported DU urine results for this background, which was highly variable.

5.3.1.4.2 Depleted Uranium Reporting Levels, Minimum Detectable Activities, and Uncertainties

The minimum reporting level for DU through April 1964 was 5.8 µg/24-hr sample (10% of the tolerance level). From May 1964 to 1971, the minimum reporting level was the same as that for EU, 20 to 28 dpm/24-hr sample, depending on the volume of the sample. The reporting level for 1972 to 1979 (TOPO procedure) has not been determined. An approach that is favorable to claimants is to use the reporting level for 1964 to 1971 [30]. In the 1980s, all results ≥0.00 dpm/24-hr sample were reported. Negative values were reported as 0.00 dpm/24-hr sample. In the 1990s and after, all actual results, including negative values, were reported.

The MDAs for DU for fluorometric measurements were determined as described in Attachment A. Median MDAs for DU from 1952 to April 1964 are listed in Table 5-8. For alpha-counting methods, the MDAs in the period from April 1964 to 1971 are the same as those for EU in Table 5-6. The MDA value for 1972 to 1979 was extrapolated from the value determined for the previous period. The MDAs for 1980 to the present were derived in the same manner as that described for plutonium but are based on <sup>238</sup>U. Table 5-9 lists median MDAs for DU from May 1964 to the present.

Table 5-8. Median MDAs for depleted uranium from 1952 to April 1964.

Period	µg/24-hr sample
1952–1955	31
1955–1959	12
1960–1964 (April)	11

Table 5-9. Median MDAs for depleted uranium from May 1964 to the present.<sup>a,b</sup>

Period	dpm/24-hr sample
1964–1969	31
1970–1971	25
1972–1979	25 <sup>c</sup>
1980–1989	0.56
1990–1992	0.4
1993–present	0.1

- a. The MDA value unit starting in 1990 is dpm/sample.
- b. Sample-specific MDA values, if found in the record starting in 1990, should be used instead of the generic MDA values in this table.
- c. Actual practice is unknown; assume continuation of earlier practice.

The discussion of the uncertainty for plutonium in Section 5.3.1.1.2 applies to DU.

5.3.1.5 Gross Alpha Urinalysis

5.3.1.5.1 Methods, Units, Isotopes, and Interferences

Gross alpha measurement is a nonspecific analysis used for workers who were potentially exposed to both uranium and plutonium in the same monitoring period. Workers who were potentially exposed to other alpha-emitting radionuclides, such as neptunium and curium, might also have been monitored for gross alpha. Urinalysis methods are discussed in Attachment A. The gross alpha method was discontinued in the early 1970s, likely in 1973 [31]. The results are reported as dpm/24-hr sample of either EU (the default analyte through 1963) or plutonium (the default analyte after 1963). Interferences are likely, because the methods were nonspecific. Isotopes are all alpha-emitting isotopes of the analyte.

5.3.1.5.2 Reporting Levels, Minimum Detectable Activities, and Uncertainties

The reporting level for gross alpha through 1963 was  $\geq 8.8$  dpm/24-hr sample (10% of the RFP tolerance level for EU). After 1963, the reporting level was  $\geq 0.9$  dpm/24-hr sample, credited to plutonium. (Gross alpha data are likely coded as G in the urine data reports [32].)

Samples with results  $\geq 0.9$  dpm/24-hr sample typically, but not always, were counted using a PHA system to determine whether to credit the result to EU or to plutonium, or a portion to both. The default condition through 1963 was to credit the result to EU unless the PHA count indicated otherwise. After 1963 (when EU operations were phased out), the default condition was to credit the result to plutonium. In either case, the results should be considered to be upper bounds because of the nonspecificity of the analysis [33].

The MDAs for gross alpha listed in Table 5-10 were determined as described in Attachment A.

Table 5-10. Median MDAs for gross alpha measurements.

Period	dpm/24-hr sample
1952	1
1953	0.88
1954–1959	0.79
1960–1962	0.55
1963	0.55
1964–1971	0.69

Uncertainties for the gross alpha urine results have not been quantified or reported. To estimate the uncertainty for results without a reported uncertainty, a reasonable approach is to divide the median MDA value by 3.3, where 3.3 is the sum of  $k_\alpha$  and  $k_\beta$  and  $k_\alpha = k_\beta = 1.645$  (see Attachment A). This uncertainty does not include the effect of interferences, which is a major issue for a nonspecific analysis like gross alpha measurement [34].

5.3.1.6 Tritium

Starting in 1973, workers were monitored for possible tritium exposures only for special projects or situations. The methods have not been reviewed but likely involved liquid scintillation measurements [35]. The urine results are reported as picocurie per liter of urine, and actual results were reported, generally with the standard deviation. It has not been determined whether the reported uncertainty in the 1970s to early 1980s is 1 or 2 times the standard deviation. The sensitivity of the method was 2 to 3 orders of magnitude better than the significant level of about 1  $\mu\text{Ci/L}$ . Although the actual MDA has

not been quantified for the methods in the 1970s and 1980s, it likely is in the range of several hundred to several thousand picocuries per liter [36]. The current MDA for tritium is 600 pCi/L (RFETS 1998c, p. 7-3).

### 5.3.2 Lung Count Data

*In vivo* lung counts have been performed at RFP since 1964 to determine the activity of plutonium in the lungs of workers who were exposed, or had the potential to be exposed, to airborne plutonium. The method of *in vivo* lung counts was to place one or more detectors over the chest of the subject and count the photons emitted from the plutonium mixture, if any, in the chest. Plutonium was not detected directly because of the low abundance of gamma photons and the severe attenuation of the more abundant L X-rays. Instead, the 59.5-keV gamma photon from  $^{241}\text{Am}$  was used to detect  $^{241}\text{Am}$ , which is present to some extent in all WG plutonium at RFP. The activity of plutonium was then calculated from the detected  $^{241}\text{Am}$  by measuring, calculating, or assuming the fraction of the  $^{241}\text{Am}$  in the plutonium mixture on the date of the lung count (see Section B.11 in Attachment B). At RFP, the fraction of the  $^{241}\text{Am}$  in the plutonium mixture has historically been characterized in terms of parts per million by weight. Direct *in vivo* measurement of plutonium in the lungs, although investigated, was never implemented at RFP (Falk et al. 1979).

The RFP lung counter also measured  $^{234}\text{Th}$ , via the 63-keV gamma (doublet) photon, to determine the activity of  $^{238}\text{U}$  in the lungs of workers exposed to DU. This measurement was made possible by the improved resolution of the germanium detectors that allowed baseline separation of the 59.5-keV gamma of  $^{241}\text{Am}$  from the 63-keV gamma doublet of  $^{234}\text{Th}$ . The activity of  $^{238}\text{U}$  was considered to be equal to that of the measured  $^{234}\text{Th}$ , assuming equilibrium (Berger 1988a).

Attachment B, Minimum Detectable Activity for *In Vivo* Lung Counts at RFP, contains more detail. Section 5.4 and Attachment C discuss the data and report forms.

#### 5.3.2.1 Americium/Plutonium

##### 5.3.2.1.1 Methods, Units, Isotopes, and Interferences

Before April 1997, lung count data were not converted to a quantified amount or activity unless there was confirmation that the count was from an actual deposition in the lungs. For unquantified results, the data are generally in units of counts per minute accompanied by a decision noted as normal, background, or some abbreviation of background. For quantified results through about 1968, the unit was micrograms of plutonium. In addition, the result was converted to a fraction of the maximum permissible lung burden (MPLB) using a plutonium-specific activity of 0.07  $\mu\text{Ci}/\mu\text{g}$  and the MPLB of 0.016  $\mu\text{Ci}$  (16 nCi) for the alpha-emitting isotopes of plutonium. Starting in about 1973, the activities of both plutonium (including all the alpha-emitting isotopes of WG plutonium) and americium ( $^{241}\text{Am}$ ) were recorded in nanocuries [37]. In addition, the activity of  $^{241}\text{Am}$  was stated as a fraction of the MPLB, using 14.7 nCi for the MPLB for  $^{241}\text{Am}$  (Falk 1993). After 1989, the results were no longer stated as a fraction of the MPLB.

There are two sources of interferences to consider. The first is the 63-keV gamma doublet of  $^{234}\text{Th}$  from DU operations being mistaken for  $^{241}\text{Am}$  in lung counts with the NaI or phoswich detector systems. This interference was most troublesome for workers with residual lung depositions of plutonium and americium who subsequently worked in DU operations [38]. The second interference is the contribution of count from  $^{241}\text{Am}$  not in the lungs (e.g., contributions from contamination on the skin, from material being cleared from the upper respiratory system, or from ingested material). A positive detection of  $^{241}\text{Am}$  did not necessarily indicate an intake (especially one that resulted in a

deposition to the alveolar-interstitial region of the lungs) of the plutonium/americium mixture, especially for a lung count in response to an incident [39].

#### 5.3.2.1.2 Reporting Levels, Minimum Detectable Activities, and Uncertainties

Reporting levels are not easily defined because quantification was preceded by verification counts and professional judgments. In addition, before 1974, the practice was not to quantify a positive detection of  $^{241}\text{Am}$  unless the deposition could be associated with a known incident with a known ppm  $^{241}\text{Am}$ . Affected workers were classified as positive unknowns or some variation. Starting in 1974, the practice was changed to quantify the plutonium depositions for positive unknowns by assuming a default value of 1,000 ppm  $^{241}\text{Am}$  on the date of the most likely intake or on the date of the first positive lung count. The ppm  $^{241}\text{Am}$  was then calculated for the date of the lung count to account for the ingrowth of  $^{241}\text{Am}$  from the nuclear transformation of  $^{241}\text{Pu}$  and the radioactive decay of the initial  $^{241}\text{Am}$  [40].

In general, this quantification was not applied retroactively to earlier positive lung counts. Once a lung deposition of plutonium had been quantified for a worker, the deposition continued to be quantified for all subsequent lung counts (except screening counts for new intakes), regardless of the result of the subsequent lung count (including negative values), until each of the last three results was less than the decision level for the count and the average of the last three results was within 1 standard deviation of 0.00 nCi plutonium [41].

The decision levels varied. From 1965 to 1968, the decision level was two times the uncertainty of the matched subject's net count, although the application of this decision level was inconsistent in this period. Starting in 1969, for NaI and phoswich detector systems, the decision level was equal to 3 times the standard deviation of the net count rate for a set of lung counts for unexposed known cold subjects based on the index method (see Attachment B). Results between 2 and 3 sigma were noted but not always investigated. For the germanium detector systems, starting in 1976 the decision level (also called the *cutoff*) was equal to 1.645 times the standard deviation of the net count rate [42]. The decision level for 1995 and later was calculated by the ABACOS-Plus<sup>®</sup> software for a probability of a Type I (false positive) error of 5% (RFETS 2000a). The decision level was used as a reporting level from 1995 to early 1997.

Table 5-11 lists the MDAs for  $^{241}\text{Am}$ , which were calculated for the evolution of lung counting systems used at RFP as described in Attachment B.

These values of MDAs are for three indices that represent the median and the approximate 5th- and 95th-percentile body statures of RFP male workers. To obtain the worker-specific MDA, the dose reconstructor can calculate the value using the information in Attachment B or interpolate (or extrapolate) from the values in Table 5-11 [43]. The worker-specific index is generally stated on lung count report forms from 1969 to 1994, and can be derived from the weight and height data on report forms from 1995 and later. (The MDA values are reported on report forms from 1995 and later, but the values are not worker-specific. The dose reconstructor should disregard these MDA values.) The default MDA would be for an index of 1.35 if height and weight (or index) data for the worker are not available [44].

The MDA for plutonium would be calculated by multiplying the worker-specific value of the MDA for  $^{241}\text{Am}$  by the MDA conversion factor (Equation B-17 in Attachment B), which is based on the value of the ppm  $^{241}\text{Am}$  on the date of the lung count. The value of the ppm  $^{241}\text{Am}$  on the date of the lung count, accounting for ingrowth of  $^{241}\text{Am}$  from the nuclear transformation of  $^{241}\text{Pu}$  and the radioactive

decay of the initial  $^{241}\text{Am}$ , is given by Equation B-18 in Attachment B. The dose reconstructor needs to establish the date of the intake and the initial ppm  $^{241}\text{Am}$ . If that information is not apparent in the

Table 5-11. Summary of MDAs for  $^{241}\text{Am}$ .

Period	Detector system	Index	MDA (nCi) for $^{241}\text{Am}$			
			Minimum system		Standard system	
			Half time	Full time	Half time	Full time
1964–1968	NaI(Tl) 4 x 4	0.90	1.7	1.5	1.3	1.2
		1.35	2.8	2.5	2.1	1.9
		1.80	4.6	4.1	3.5	3.2
1969 →	NaI(Tl) 4 x 4	0.90	–	–	0.8	0.76
		1.35	–	–	1.3	1.3
		1.80	–	–	2.2	2
1973 →	Phoswich	0.90	–	–	1.2	1.2
		1.35	–	–	2.0	2.
		1.80	–	–	3.3	3.2
1976 – 1978	Ortec Arrays (High-purity Ge)	0.90	0.26	0.18	0.2	0.14
		1.35	0.48	0.32	0.37	0.25
		1.80	0.86	0.59	0.66	0.45
1979 →	Ortec Arrays (High-purity Ge)	0.90	0.2	0.14	0.16	0.11
		1.35	0.37	0.25	0.28	0.19
		1.80	0.66	0.45	0.51	0.35
1978 →	PGT I Arrays (High-purity Ge)	0.90	0.22	0.15	0.17	0.12
		1.35	0.4	0.27	0.31	0.21
		1.80	0.71	0.49	0.55	0.38
1979 →	PGT I Arrays (High-purity Ge)	0.90	0.17	0.12	0.13	0.09
		1.35	0.31	0.21	0.24	0.16
		1.80	0.55	0.38	0.42	0.29
1979 →	PGT II Arrays (High-purity Ge)	0.90	0.22	0.15	0.17	0.12
		1.35	0.4	0.28	0.31	0.21
		1.80	0.74	0.5	0.57	0.39
1985 →	PGT Organ Pipe Ge Detectors	0.90	–	–	0.15	0.11
		1.35	–	–	0.26	0.18
		1.80	–	–	0.46	0.32
1991 →	EG&G Organ Pipe Ge Detectors	0.90	–	–	0.14	0.1
		1.35	–	–	0.26	0.18
		1.80	–	–	0.48	0.33
1995 →	Ortec 2 Organ Pipe Ge Detectors	0.90	–	–	–	0.14
		1.35	–	–	–	0.3
		1.80	–	–	–	0.6

available records, an approach that is favorable to claimants is to assume the initial ppm  $^{241}\text{Am}$  to be 100 [45].

The assumption of the intake date is not straightforward and should balance maximizing the plutonium lung deposition (intake date is close to the date of the lung count) and maximizing the accrued lung dose (intake date is far from the date of the lung count). In addition, the choice of intake date for the lung count data should be coordinated with that for the associated urine data [46].

The dose reconstructor must choose the value of the initial mass fraction of  $^{241}\text{Pu}$ . At the RFP lung counter, 0.005 was historically used as the initial mass fraction of  $^{241}\text{Pu}$  and is a realistic choice for intakes that occurred in the 1950s to June 1976. The fraction 0.0036, based on the isotopic composition for RFP stream plutonium in the mid-1970s, should be used for intakes that occurred from July 1976 to 1989. For intakes incurred after 1989, the initial fraction of  $^{241}\text{Pu}$  should be reduced to account for the aging (radioactive decay) of the  $^{241}\text{Pu}$  [47].

The uncertainties of the results were reported for the net count per minute starting with the germanium detector systems in 1976. The uncertainty was reported at 1 standard deviation and included only the contribution from counting statistics. Starting in approximately 1981, the counting statistics uncertainty was also applied to the assessed activity and to the value of the fraction of the MPLB [48]. With the advent of the ABACOS-Plus<sup>®</sup> software in 1995, the percent error at 1 standard deviation was reported for all identified nuclides. Beginning on October 11, 1999, a 30% systematic uncertainty, which included contributions of uncertainties in the chest wall thickness (CWT), the location of the activity in the lungs, the uncertainty in the ppm <sup>241</sup>Am, and the influence of activity deposited in other organs, was included in the total propagated uncertainty (RFETS 2000a, p. 3-18).

The major uncertainty for the calculation of the plutonium lung deposition is the ppm <sup>241</sup>Am in the plutonium in the lungs at the time of the lung count. Elements contributing to the uncertainty are the intake date, the value of the initial ppm <sup>241</sup>Am, the initial fraction of <sup>241</sup>Pu, and the degree of association of the americium with the plutonium while in the lungs. An underlying assumption is that the americium remains associated with the plutonium particles in the lungs until the particles are dissolved or removed from the lungs. The degree of validity of this assumption has not been determined [49].

### 5.3.2.2 Thorium/Depleted Uranium

#### 5.3.2.2.1 Methods, Units, Isotopes, and Interferences

The method to detect DU was to detect the 63-keV gamma (doublet) photon of <sup>234</sup>Th and to calculate the activity of <sup>238</sup>U, assuming equilibrium. This method was implemented manually for special cases in approximately 1978. Starting in 1983, the count data for the 63-keV doublet photon were routinely processed and reported. However, the activity of the <sup>238</sup>U was calculated only for special cases and not routinely. A supplemental method, implemented in about 1989, detected the 93-keV gamma doublet photon of <sup>234</sup>Th, and the count data were routinely processed and reported. This supplemental method was used mainly to reduce false positive results for the detection of <sup>234</sup>Th because detection of both doublet photons was required before detection of <sup>234</sup>Th was considered.

Starting in 1995, the activity of <sup>238</sup>U was calculated and reported if the 63-keV peak (or sometimes the 93-keV peak) was detected by the ABACOS-Plus<sup>®</sup> peak-search software. If the peak was not detected, the activity of <sup>238</sup>U was reported as less than the decision level (the activity of the decision level was reported). Starting in early 1997, the activity of <sup>238</sup>U was reported, including negative results, even if a peak was not detected. In a similar manner, the activity of <sup>235</sup>U was reported. Starting in about 1999, the activity of <sup>238</sup>U was based solely on the 63-keV peak.

The main part of the data for the 63-keV doublet photon is in units of net counts per minute. To convert to activity (nanocuries) of <sup>238</sup>U, the counts per minute is divided by the calibration factor for <sup>241</sup>Am (see Attachment B) and normalized to the ratio of photon abundances [abundance of 59.5-keV gamma, <sup>241</sup>Am, is 0.359; abundance of 63-keV doublet gamma, <sup>234</sup>Th, is 0.0381 (Lederer and Shirley 1978); the ratio (59.5-keV gamma/63-keV doublet gamma) is 9.4]. That is, nanocuries of <sup>238</sup>U equals [(<sup>234</sup>Th 63-keV net cpm) divided by (<sup>241</sup>Am calibration factor)] multiplied by 9.4. To calculate the activity for DU, the <sup>238</sup>U activity is divided by 0.89 (see Section 5.2.4.1).

The interference is <sup>238</sup>U in natural uranium. Unless there is an activity reported for <sup>234</sup>U that is approximately equal to that reported for <sup>238</sup>U, the dose reconstructor should use the assumption (favorable to claimants) that the <sup>238</sup>U activity is all from occupational exposure to DU [50].

#### 5.3.2.2.2 Reporting Levels, Minimum Detectable Activities, and Uncertainties

Reporting levels were not generally used for DU until 1995 with the implementation of the ABACOS-Plus<sup>®</sup> software (see Section 5.3.2.2.1). Before 1995, the <sup>238</sup>U activity was generally quantified only after verification of an intake.

The MDA for <sup>238</sup>U has not been determined rigorously. However, the <sup>238</sup>U worker-specific MDA can reasonably be expected to be a multiple of the <sup>241</sup>Am worker-specific MDA because the detected photons (63 keV and 59.5 keV) are very close in energy. As described in Section 5.3.2.2.1 for using the calibration factor for <sup>241</sup>Am to determine the <sup>238</sup>U activity, the <sup>238</sup>U worker-specific MDA can be obtained by multiplying the <sup>241</sup>Am worker-specific MDA by 9.4. That result is divided by 0.89 to obtain the worker-specific MDA for DU [51]. (As noted in Section 5.3.2.1.2 for americium and plutonium, MDA values are reported on report forms for 1995 and later, but are not worker-specific. The dose reconstructor should disregard these MDA values.)

The major uncertainty is the assumption of equilibrium of the <sup>234</sup>Th with the <sup>238</sup>U before 1990, when DU was still being processed. Part of the process was to remove decay chain radionuclides, especially thorium, by heating the uranium ingot to drive the smaller atoms of thorium to the surface or top of the ingot, which was then cut off. The result was DU metal with a deficiency of <sup>234</sup>Th for several weeks plus scrap DU with an excess of <sup>234</sup>Th (super-equilibrium). The assumption of equilibrium when super-equilibrium existed is favorable to claimants [52]. The effect of a deficiency of <sup>234</sup>Th (not favorable to claimants) is mitigated by the rapid ingrowth of the <sup>234</sup>Th into the DU. Fifty-percent equilibrium occurs after 24 d following a thorium strike, and 90% occurs after 80 d.

The standard deviation of the net count rate is reported through 1995 but includes only the contribution of counting statistics. To estimate the uncertainty of a <sup>238</sup>U or DU activity calculated from the net count rate, the dose reconstructor can divide the worker-specific MDA by 3.3 [53].

### 5.3.3 Other Bioassay Data

#### 5.3.3.1 Wound Count Data

Wounds are defined as any break in the skin (e.g., cuts, punctures, abrasions, acid burns). Any wound that occurred in a work area involving plutonium was monitored for plutonium contamination, especially after the advent of the wound counter in 1957. Counting a blood sample or directly counting the wound site with an alpha detector were also methods used to monitor wounds to detect possible plutonium contamination. In RFP terminology in the 1950s and 1960s, wound counts were called *gamma specs*, and the wound counter was called a *gamma spectrometer*. Wounds occurring in uranium work areas were monitored selectively. The record could contain an incident report, a wound count data sheet, a medical decontamination report, and a medical treatment report, depending on the era and circumstances.

The process was to attempt to decontaminate the wound in the building of the occurrence by washing and encouraging bleeding to flush any plutonium out of the wound. Then the worker was sent or escorted to the medical facility for a wound count and additional decontamination if the wound count was positive (Berger 1988b). The sequence of additional decontamination was washing with soap and water, washing with commercial bleach<sup>®</sup>, scrubbing with commercial bleach<sup>®</sup>, and excision.

Wound count information is largely irrelevant to dose reconstruction [54]. The relevant items are the urinalysis data, the identification of the mode and date of intake, and whether there was residual plutonium at the wound site. If there was residual plutonium at the wound site, the dose reconstructor

should consider an acute injection into the blood stream plus a possible long-term chronic injection. The profile of the urine data after the date of the wound provides guidance on the proportion of the acute and chronic components. If there was no detected residual plutonium at the wound site, there would have been an acute injection into the blood stream.

Residually positive uranium contamination in wounds occurred rarely, if at all. It is reasonable to assess any initially positive uranium wound as an acute injection.

#### 5.3.3.2 Nasal Smears and Fecal Samples

Nasal smear (later called swab) and fecal sample data were occasionally obtained throughout RFP operations as supplemental data for workers with actual or suspected significant inhalation intakes. Through the 1980s, they were used subjectively to verify that an intake did occur and to estimate the possible magnitude of the intake. The data have also been used to determine or confirm the ppm <sup>241</sup>Am in the inhaled plutonium mixture. Some obstacles to using nasal smear or fecal data to quantify an intake are unknown particle size distribution, unknown fraction of the plutonium captured by the nasal smear or fecal sample, inconsistent and largely undocumented sampling technique for nasal smears (which sometimes were called *nose blows*), and unknown counting efficiency (e.g., sample geometry and alpha absorption, especially in the 1950s and 1960s). Through 1989, the requested fecal sample was the second voiding following the incident. In some cases, the second, third, and fourth voidings were requested.

Starting in the 1990s, the nasal or mouth smears were used as a workplace indicator to identify potential intakes, and fecal sampling was used to confirm and evaluate suspected intakes (RFETS 1998d, p. 2-2).

The reported MDAs (RFETS 1998d, pp. 2-7, 2-8) are:

- 20 dpm/sample, for (gross alpha, liquid scintillation) routine nasal samples
- 0.2 dpm/sample, for fecal samples with a 21-d reporting time (plutonium alpha isotopic)
- 1.3 dpm/sample, for fecal samples with a 14-d reporting time (plutonium alpha isotopic)
- 2.6 dpm/sample, for fecal samples with a 7-d reporting time (plutonium alpha isotopic)
- 100 dpm/sample, for fecal samples with a 2-d reporting time (nonisotopic, rapid analysis)

The reporting times are the times for the laboratory to analyze the sample and report the results. The shorter reporting times indicate an expedited analysis, with the trade-off of a less sensitive analysis (a higher MDA).

These MDA values apply to samples starting approximately in 1993 and are specifications for the laboratory. (Note: The laboratory MDA does not depend on the time after intake that the sample was excreted.) Most reports of fecal sample results do not give the sample-specific MDA but might give the decision level ( $L_c$ ), which is approximately one-half of the sample-specific MDA. MDA values for earlier years are not available.

## 5.4 RECORDS AND REPORTS

This section discusses the interpretation of the data and information on records and reports of bioassay data [55]. Attachment C, Examples of Records and Reports Used at RFP, contains the figures described below.

### 5.4.1 Urinalysis Records and Reports

Figures C-1 to C-3 are examples of the Urinalysis Record Card and the Health Sciences Data System – Urinalysis Detail report. The Urinalysis Record Card was the recording medium for the urinalysis data from 1952 to 1969 and is the primary record for urine data in this period. The urine data were manually entered on this card through 1969. These data were also entered into a database starting in about 1961. In about 1970, the HSDS was implemented to record, process, and report urinalysis data and the derived fraction of the maximum permissible systemic burden.

#### 5.4.1.1 Interpretation of the Urinalysis Record Card

Urine results are presented in columns under the month for a given year (in the row). The top number is the day of the month (assumed to be the excretion day). The middle number is the sample result, either a number or BK (see Section 5.3.1.1.2). The bottom number is the technique code and refers to the codes in the header (see Attachment A).

The unit of the result is given in the header. Sometimes the unit is written with the result (e.g.,  $\mu\text{g}$  in Figure C-1, analysis Code A, 1955). Be careful not to interpret  $\mu\text{g}$  as the number 49.

The corresponding data on the Health Sciences Data System – Urinalysis Detail report should be the same as that on the Urinalysis Record Card. If not, the data on the Urinalysis Record Card should be taken as the correct data, with the exception noted in Section 5.3.1.1.2 (i.e., some plutonium results reported as BK on the card were re-reported with the actual result) [56]. On some cards, the dose reconstructor might observe the initially reported result crossed out and replaced by a lower value. The technical basis for that change has not been determined. In addition, that change generally was not applied to the data in the HSDS. It is reasonable and favorable to claimants to disregard the modified result [57].

The analyte code for DU was sometimes transcribed incorrectly from the card to the urinalysis detail report as U (see Figure C-1) rather than D (see Figures C-2 and C-3) with the unit of dpm/24-hr sample rather than  $\mu\text{g}/24\text{-hr}$  sample.

Figures C-4 and C-5 are two versions of urinalysis reports from the HSDS. Both versions report the data in the same way but with differences in the headers. Figure C-5 (the newer version) adds a column (the uncertainty of the result).

#### 5.4.1.2 Interpretation of the Health Sciences Data System – Urinalysis Detail Report

The Activity Date is taken to be the date that the sample was excreted. However, the recorded date frequently was the date that the sample was received at the laboratory, especially for routine samples. (This applies also to the dates on the Urinalysis Record Card.)

ANAL is the code for the analyte:

P = plutonium

A = americium

U = enriched uranium (pre-1970, approximately)

U = depleted uranium (1970–1989, approximately)

D = depleted uranium (1952–1969, approximately)

G = gross alpha

NO CAL is a code used to flag the logic of the software.

- 0 = use normally in the calculation
- 1 = do not use in the calculation
- 2 = date of a new intake

Code 1 was used primarily for two situations to exclude a sample result from the systemic burden calculation: If the excretion of the analyte was enhanced by a chelation treatment or if the analysis of the sample did not meet quality standards (an invalid analysis or result). Sample results within 90 d of a chelation treatment were generally (or should have been) coded as 1 [58]. The use of Code 2 to flag the date of a new significant intake occurred inconsistently. In reports generated in the 1980s, an asterisk was used instead of a Code 2 to flag the date of a new intake. The dose reconstructor should disregard the Code 2 or asterisked entries.

- ELAPSED DAYS is the number of days since the hire date. This data field is not likely to be of use.
- The EXPOSURE VALUE or DPM/24HR is the result of the urinalysis for the analyte. In general, the unit was dpm/24-hr sample, except for DU, from 1952 to April 1964.
- The column in parentheses is the uncertainty, starting in 1980. Any value or symbol in the parentheses before 1980 is only a placeholder and should be disregarded [59].
- The BODY BURDEN % or SYSTEM BURDEN is the fraction of the maximum permissible systemic burden calculated from Code 0 results for plutonium and for americium. This data field is not likely to be of use.

#### 5.4.1.3 Interpretation of Other Urinalysis Reports

Figures C-6 and C-7 are examples of urinalysis reports from the onsite bioassay laboratory from 1990 to the mid-1990s. Figure C-6 is for a special urine sample analyzed for plutonium, and Figure C-7 is for a routine urine sample analyzed for plutonium. Both forms have the same format. The first three columns are self-explanatory; the remaining columns are:

- Dec Level is the decision level ( $L_c$ ) in units of dpm/sample.
- Aspec is code for the alpha spectrometry quality. The Aspec codes are defined on the lower left portion of the report. Aspec code 0 is analogous to the Code 0 previously used for urine data in the HSDS. Codes 1, 3, and 4 indicate a failed analysis and disqualify the result [60].
- DQO is the code for status of the data quality objectives for the results of the batch blank and control samples. The DQO codes are defined on the lower center portion of the report. DQOs, in theory, were assessed for the blank, accuracy, and precision. In practice, the DQO was usually assessed only for the blank. Hence, the notation ANN means that the blank was acceptable, the accuracy was not assessed, and the precision was not assessed. An F would indicate that the batch failed a DQO, and, if the batch failed, every sample in the batch was conditionally failed pending further evaluation [61].
- Batch Val is the overall validation of the result. V means valid, and I means invalid. Do not use a result that has an I validation code [62].

- Analyte is self-explanatory.
- Recovery is the fraction of the tracer recovered by the analysis.
- Result (DPM) is the result of the sample in units of dpm/sample. The dose reconstructor should assume a 24-hr urine sample unless there is information that indicates otherwise [63].
- Error is the uncertainty at 1 standard deviation.

Figure C-8 is an example of the urinalysis data report by Quanterra, a commercial offsite laboratory, starting in 1993. The form header information, except for the collection date and the matrix, is not useful. The collection date, if not the sample excretion date, should be replaced by the sample date written on the form [64]. The result header is largely self-explanatory.

- The primary information is the RESULT and its TOTAL ERROR (at 1 standard deviation) in units of dpm/sample (REPORT UNIT).
- The decision level ( $L_c$ ) and the sample-specific MDA are also stated.
- The YIELD is the percent recovery of the tracer.
- The RST/MDA is the ratio of the result and the sample-specific MDA.
- The RST/CNTERR is the ratio of the result and the counting error.
- The ANALYSIS DATE is the date the sample was analyzed, not the excretion date.
- The ALIQUOT SIZE is the volume of the sample in milliliters (ALQ UNIT).
- The DETECTOR ID is self-explanatory.
- The METHOD NUMBER references the document number of Quanterra's analytical procedure used to process the sample.

Figures C-9 and C-10 are examples of the analytical report of the onsite bioassay in the mid-1990s. Most of the information is self-explanatory. Some points:

- The date sampled is the excretion date.
- The data can only be used if the Alpha Spec Condition Code is 0 and if the Data Validation Code is V.
- The  $^{234}\text{U}$  activity is approximately equal to  $^{238}\text{U}$  activity in Figure C-9, and both results are greater than the decision level. As stated in Section 5.3.1.4.1, this is the classic pattern indicating natural uranium, not an occupational intake of DU.

Figure C-11 is an updated version of the urinalysis data report of Quanterra. The significant improvement is the validation of each result (QUAL = V). Use only results with a QUAL = V.

Figure C-12 is the urinalysis data report for General Engineering Laboratories, Inc. The header information is largely self-explanatory.

- The Date Collected is the sample excretion date. The 24-hr clock time (0600) is also noted; 0600 was used as a default end time of the 24-hr excretion period if the actual end time is not documented [65].
- The VF is the volume fraction, the fraction of the sample that was analyzed. VF = 1 indicates that the entire sample was analyzed.
- Use only data that have a Data Validation Code = V.

Figure C-13 is an example of the data card used in the 1970s and 1980s to record data manually for tritium urine samples and for other samples such as fecal samples and nasal smears. The unit of the tritium results is pCi/L. The unit of the fecal sample and nasal smear results is dpm/sample [66].

There might be other versions of *in vitro* bioassay reports. In all cases, the important data are the excretion date, the analyte, the result in the proper units, and whether the result was valid.

#### 5.4.2 Lung Count Records and Reports

Figure C-14 is an example of an early lung count report. The aftermath of the October 15, 1965, plutonium fire in Buildings 776 and 777 was the first extensive use of the lung counter to detect americium and plutonium depositions for RFP workers.

- The *in vivo* lung counting system was called the Body Counter. In RFP terminology, the lung count was called a body count through 1989. Most claimants will likely use the term body count instead of lung count. The dose reconstructor should not mistake the RFP body count for a whole-body count, which was widely used at other facilities to detect intakes of fission products.
- The Time field was used either for the time of the day at the start of the count or for the length of the count. In this case, the length of the count was noted (40 MLT means 40 minutes live time) [67].
- The “Minus Bkg + match” notation indicates that the result is the net count rate after the room background count rate and the net count rate of a matched person was subtracted.
- The “1.4 LB” notation is the calculated plutonium deposition in terms of the multiple of the MPLB of plutonium (1 MPLB = 16 nCi Pu alpha emitters) [68].
- The Body Location is the position of the detector. In this case, the detectors were positioned over the right and left portions of the chest. In many early counts, one of the detectors was positioned over the liver or gut or below the sternum rather than over one side of the chest. Those data have little dosimetric use [69].

Figure C-15 is the August 1967 revision to the Health Physics Body Counter Information form. The change was to present the results after subtraction of the room background, Net (1) c/m, and after subtraction of matched subject net cpm, Net (2) c/m. In addition, the plutonium deposition was stated in terms of micrograms of plutonium.

Figure C-16 is the August 1968 revision to the Health Physics Body Counter Information form.

- The Net cpm is the subject’s total count rate minus the room background count rate.

- The Predicted cpm replaced the net count rate of the matched subject.
- The Result is the final net cpm.
- In this example, there is no measurement for the right chest. The dose reconstructor should estimate the contribution for the right chest before using data from this count, because the lung data set generally includes contributions from both right and left lungs.

Figure C-17 is an example of a lung count with no result tabulated. This is an example of a positive unknown case (see Section 5.3.2.1.2). In addition, note the tabulation of the index, which was used later to estimate the chest thickness. Sufficient information is presented here and in Attachment B to allow the dose reconstructor to calculate the plutonium and americium activities for this lung count, for any assumed or actual intake date.

Figure C-18 is the December 1973 revision to the previous form, with expanded information.

- The ROOM is the designation of the counting chamber, A, B, or C, used for this count.
- The RATIO field documented the ratio of the  $^{241}\text{Am}$  photopeak region of interest (ROI) and a background ROI around 100 keV. The ratio was used as a supplemental subjective tool to improve detection of americium. A ratio of 1.20 or greater indicated likely detection of americium [70].
- The ppm  $^{241}\text{Am}$  was used to record either the ppm  $^{241}\text{Am}$  for a new incident or, as in this case, the calculated value of the ppm  $^{241}\text{Am}$  (including of  $^{241}\text{Am}$ ) for a previous actual or assumed intake.

The form included fields to record the activity and fraction of the MPLB for both plutonium and americium. (This lung count, now quantified, is for the same positive unknown case as Figure C-17).

Figure C-19 is an example of the previous form for a count judged to be background. Data fields were added to capture data for measurements of the L X-ray (17-keV) ROI, especially for the phoswich detector system. Although that information was captured occasionally, the data were not used because of the instability of the predicted background c/m [71].

The previous lung count reports were for counts using the NaI detector system. Figure C-20 is an example of the lung count data for a germanium detector system. The data for the five to eight detectors of the germanium systems were multiplexed into a composite total count tabulated in the row for TOTAL CHEST. The standard deviation of the resultant counts per minute is based on counting statistics only. For workers with confirmed lung depositions, the calibration factors for plutonium and americium were generally written on the form, as in this case.

Figure C-21 is an example of the first computer report for the lung count results. The data are labeled appropriately. This report is for a worker with a confirmed deposition. The report for workers without a confirmed deposition does not report the calibration factors, the ppm Am, or the lung burden. Rather, it reports the cutoff, which is the decision level, and Normal if the DIFFERENCE is less than the cutoff [72].

Figure C-22 is an example of a computer report for the phoswich detector system, which was used as a backup screening system in the 1980s. Note the outcome statement, "RESULTS ARE NORMAL." If the results were not normal, the subject would have been recounted with a germanium detector

system [73]. Because the phoswich system could not resolve the 60- and 63-keV photopeaks, they share a common ROI. Another feature is the tabulation of the total count for each pertinent ROI. ROI 3 is the total count for the 60-keV to 63-keV ROI, and ROI 4 is the background count for the 60- and 63-keV photopeaks. ROI 4 was also used as the count for the 93-keV photopeak, and ROI 5 was its background. ROI 2 was likely the count in the L X-ray region, but it was not used.

Figures C-23 and C-24 are examples of the next generation of reports for the germanium detector systems. The innovation is the data capture in 10 ROIs. In Figure C-24, the ROIs are labeled with the photopeak of interest. Although the data were captured, most of the data were not used, mainly because the relationship between the photopeak and its background was not established or was too variable [74]. ROI 5, labeled BKG in Figure C-24, is the common background (divided by a factor) for both the 60- and 63-keV photopeaks.

Figure C-25 is an example of a report for a worker with a confirmed deposition. There are no new fields.

Figure C-26 is an example of a report for a worker with no detected deposition and illustrates a frequent problem with the L X-ray data, the problem of low-end electronic noise in one or more of the detectors. The dose reconstructor should disregard all L X-ray data (including the 13- and 17-keV ROIs) [75].

Figure C-27 is an example of a report on which data for the 93-keV photopeak are analyzed and presented.

Figure C-28 is an example of the next generation of reports. On this report, the ROI data for each detector are tabulated separately, as is the sum. ADC #1 stands for analog-to-digital converter for detector #1, which in this case is an EG&G detector, and similarly for the other detectors. This report does not report the results in terms of the fraction of the MPLB, an obsolete concept since 1989 [76].

Figure C-29 is an example of the lung count report generated by an early version of the ABACOS-Plus<sup>®</sup> software, to mid-February 1997. Because this software is based on a peak-search method, no ROI data are available. In addition, if a uranium or americium peak was not found, the activity was reported as less than the decision level [77].

Figure C-30 is an example of the lung count report generated by the ABACOS-Plus<sup>®</sup> software after mid-February 1997, when the reporting protocol was changed. The primary change was that the activities of <sup>235</sup>U, <sup>238</sup>U, and <sup>241</sup>Am are calculated and reported, even if the peak was not detected or if the result was negative. The MDA values are for the average worker, as stated on the report. The MDA value for <sup>238</sup>U is lower than the worker-specific decision level for this case. The worker-specific MDA should be at least twice the worker-specific decision level.

Figure C-31 is an example of the lung count report from the ABACOS-Plus<sup>®</sup> software for a worker with a confirmed deposition. The software calculated the deposition for the plutonium isotopes based on the intake date noted in the header and on the calculated ppm <sup>241</sup>Am (including ingrowth), which was based on the value of the initial ppm <sup>241</sup>Am in the worker's file. The % Error for <sup>241</sup>Am is assigned to the plutonium isotopes. The basis of the decision level for the plutonium isotopes is not obvious, but is likely the decision level for detecting the L X-rays. In any case, the decision level value listed here does not apply and should be disregarded for the plutonium isotopes [78]. The value of the ppm <sup>241</sup>Am on the date of the count is not reported on lung count reports generated by the ABACOS-Plus<sup>®</sup> software. This value can be calculated using Equation B-18 in Attachment B and the value of the initial ppm <sup>241</sup>Am tabulated generally on one of the early lung count reports [79].

Much of the information from the ABACOS-Plus<sup>®</sup> software is not useful, including Count Rate, Detector Count Rate, Analysis Limits, and the total activity.

The dose reconstructor should note the intake date. If the intake date is different from the date for Count Started, the intake date is from the file for a worker with a confirmed deposition. Otherwise, the date of the lung count is used as the intake date [80].

The dose reconstructor should be aware that the lung counter detectors were also used for wound counts (Berger 1988b; RFETS 2000a). Reports of wound measurements, including the calibration of the detector using americium and plutonium sources, look the same as the lung count reports except for some header information (name, employer, job code, reason, height, or weight).

It is important to note that the activities calculated for plutonium for lung counts are based on a specific, actual, or assumed intake date and initial ppm <sup>241</sup>Am. The plutonium values are valid and appropriate only for that intake data. If the dose reconstructor chooses to use another intake date or initial ppm <sup>241</sup>Am, the dose reconstructor should recalculate the set of plutonium lung deposition activities based on the recalculated ppm <sup>241</sup>Am for ingrowth. This is accomplished by multiplying the original activity of plutonium by the ratio of the original ppm <sup>241</sup>Am on the date of the count divided by the new value of the ppm <sup>241</sup>Am on the date of the count. The new value of the ppm <sup>241</sup>Am on the date of the count can be calculated using Equation B-18 in Attachment B. The dose reconstructor should adjust the activities for the discontinuity factors presented in Attachment B. In general, use of the discontinuity factors is favorable to claimants [81].

## 5.5 ATTRIBUTIONS AND ANNOTATIONS

Where appropriate in this document, bracketed callouts have been inserted to indicate information, conclusions, and recommendations provided to assist in the process of worker dose reconstruction. These callouts are listed here in the Attributions and Annotations section, with information to identify the source and justification for each associated item. Conventional References, which are provided in the next section of this document, link data, quotations, and other information to documents available for review on the Project's Site Research Database.

Much of the information in this TBD, including the Attachments, was written by Roger B. Falk and is based on his insights, recollections, research and development activities, and administration in the radiation dosimetry and health effects programs at the Rocky Flats Plant.

- [1] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
The statements of the primary types of intakes and bioassay data are based on the observations by the author during his work at RFP in the internal dosimetry and health effects programs.
- [2] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
This statement is based on the observations of such notations on incident and lung count reports related to ZPPR materials.
- [3] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
The multiplier for WG plutonium is the inverse of Equation B-17 in Attachment B. This multiplier is modified to apply to ZPPR plutonium based on the ratio of the weighted specific activities of the <sup>239</sup>Pu and <sup>240</sup>Pu for WG and ZPPR plutonium, 0.071 and 0.0767, respectively. The ratio of 0.926 times 48.2 results in the value of 44.6 found in the ZPPR multiplying factor.

- [4] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
Oxides of plutonium metal (air-oxidized and fire-oxidized) are classified as type S and most other plutonium compounds as type M by the ICRP (ICRP 1994a). In any case, the dose reconstructor should use the solubility class that is most favorable to claimants.
- [5] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
Retention of plutonium in the lungs of workers exposed in the 1965 plutonium fire was observed to be more avid than predicted by the default ICRP type S model (ICRP 1994b), based on lung counts performed as part of the Former Radiation Worker Medical Surveillance Program at RFP, 28 to 38 yr after intake.
- [6] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
Oxides (air-oxidized and fire-oxidized) of plutonium metal are classified as type S and most other plutonium compounds as type M by the ICRP (ICRP 1994a). In any case, the dose reconstructor should use the absorption type that is most favorable to claimants.
- [7] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
The recommendation is favorable to claimants when intakes are assessed from airborne plutonium data and is essentially neutral when intakes are assessed from urine or lung count data.
- [8] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
This is a self-evident statement because the source of the americium is only from the decay of  $^{241}\text{Pu}$ . No other americium isotopes are involved.
- [9] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
This statement of how bioassay data were used during operations at RFP does not preclude the use of these data for dose reconstructions when and if appropriate.
- [10] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
Spot urine samples for plutonium were rarely requested and then usually associated with a significant incident, especially an incident with chelation (DTPA) treatment follow-up. Such exceptions should be easily discernable in the documentation of the incident in the worker's health physics file, especially starting in 1990, the period of interest for this recommendation. In addition, many of the urine sample result reports have the volume of the sample recorded [see Figures C-8 to C-12. (Although some of these examples are for uranium analytes, the format of the report is the same for plutonium analytes.)]. These reported volumes can be used to normalize the result to a 24-hr sample when appropriate.
- [11] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
The original 2003 version of this sentence was stated incorrectly. The factor of 1.0264, when multiplied by the intake assessed from  $^{239,240}\text{Pu}$  urine data, would yield the intake for  $^{238,239,240}\text{Pu}$ , not the  $^{238}\text{Pu}$  component of the intake. In addition, the factor was based on a slightly different isotopic composition from that stated in Table 5-1. The  $^{238}\text{Pu}$  component of the intake is obtained correctly by multiplying the intake assessed from  $^{239,240}\text{Pu}$  urine data by 0.0235, a value obtained by dividing the  $^{238}\text{Pu}$  fraction of alpha activity stated in Table 5-1 by 0.98, the sum of the fractions of alpha activity for the  $^{239}\text{Pu}$  and  $^{240}\text{Pu}$  isotopes.

- [12] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
Interferences that add to the value of the analyte are always favorable to claimants. Therefore, the recommendation was made to use the results as found in the record unless the dose reconstructor had generic instructions, outside the purview of this TBD, to do otherwise.
- [13] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
This statement is based on the property of the PHA system to separate and count the alphas by their energies. The alpha energies of the  $^{239}\text{Pu}$  and  $^{240}\text{Pu}$  isotopes were sufficiently different from the alpha energies of americium and thorium to allow plutonium analyses to be unaffected by the presence of americium or thorium, if any.
- [14] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
This statement, based on informal discussions in the 1980s and early 1990s with Dale L. Bokowski, the lead bioassay chemist at Rocky Flats starting in 1961, was included here for completeness.
- [15] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
The recommendation for the dose reconstructor to be wary of, and generally not use, urine data flagged with Code 1 is based on good science and common sense. Although chelation-enhanced urine data might be favorable to claimants, use of such data without modification in standard models that are based on unenhanced data is not scientifically sound. It is also not sound to use data that did not pass quality standards in real time.
- [16] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
The information in this paragraph is based on observations and deductions of the author from review of original urine data logs and individual urine data reports in preparation of this TBD section and Attachment A, as well as from personal involvement in the development of improved urinalysis reporting protocols in real time at RFP in the 1980s and early 1990s.
- [17] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
The recommendation to use the median value of the MDA if a sample-specific MDA could not be determined was the outcome of the internal review of a draft of this document, to be consistent with the generic approach adopted by the program. This recommendation no longer needs to be made.
- [18] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
This statement is based on an undocumented conversation with Steven C. Baker, Manager of Radiological Health at RFETS, in the summer of 2003.
- [19] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
The recommendation to use the values in Table 5-19 seemed to be the only viable option.
- [20] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
This information is based on the author's recollections of the implementation of these upgrades in real time at RFP.
- [21] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
This statement is based on the observation that the same reporting format used for plutonium results was used for americium results.

- [22] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
This information is based on informal conversations with in the early 1990s Dale L. Bokowski, the lead bioassay chemist at Rocky Flats starting in 1961, prior to his retirement from RFP in 1992.
- [23] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
This credibility check is presented to the dose reconstructor as optional guidance and does not preclude the use of americium urine data for dose reconstructions if deemed appropriate by the dose reconstructor, even if the data do not pass this credibility test. Note also that the maximum ingrowth of americium in virgin WG plutonium (with 0.5% by weight  $^{241}\text{Pu}$ ) is less than 5,000 ppm. Plutonium with 10,000 ppm  $^{241}\text{Am}$  or greater would be credible only for a process that enhanced the americium concentrations, such as those processes listed.
- [24] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
This recommendation was based on the plutonium/americium activity ratio, which is considerably greater than 2 for WG plutonium, and the problem of the thorium interferences in americium urinanalyses. These two factors make the plutonium urine data set the better choice to determine plutonium intakes.
- [25] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
This recommendation extrapolates a value favorable to claimants forward to the next point in time for which the reporting level was determined.
- [26] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
This assumption states the obvious; that is, if there are interferences that contribute to the magnitude of the results, considering those interferences as EU results in a higher than actual outcome and, hence, is favorable to claimants.
- [27] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
It is not clear in the urine data logs for 1964 to 1971 which electroplated uranium samples were for EU and which were for DU. EU operations were discontinued in this period although some urine sampling for EU could have occurred for workers involved in decontamination activities.
- [28] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
The statements about the units of the reported urine data are based on observations of numerous urine data reports.
- [29] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
This recommendation implies dividing the intake assessed from the assumed  $^{238}\text{U}$  urine data by 0.89 (the  $^{238}\text{U}$  fraction of total DU activity) to calculate the total DU intake. This approach is favorable to claimants by about 12% if the activities of the  $^{234}\text{U}$  and  $^{235}\text{U}$  were actually included in the reported uranium urine results in the 1980s.
- [30] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
This recommendation extrapolates the earlier practice for a period when the actual practice is not known. This approach is favorable to claimants if the earlier values would result in a higher intake assessment, as in this case.

- [31] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
No documented date was found about when gross alpha analyses were discontinued. The year 1973 was estimated following a review of HSDS urinalysis reports for a sampling of workers previously sampled for gross alpha, with a finding of no analysis code G after 1972.
- [32] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
Urinalysis code G was observed in HSDS urinalysis reports to 1972. Code G correlates with the gross alpha B<sub>2</sub> analysis code on the Urinalysis Record Card (see, for example, Figure C-2).
- [33] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
A better way to indicate the generosity of the nonspecificity of the gross alpha result if applied to a specific radionuclide is to use the term "favorable to claimants" rather than "upper bounds."
- [34] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
The effect of interferences is not included in the estimate of the standard deviation because it is not really a random variable but rather an intermittent bias of unknown magnitude.
- [35] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
Liquid scintillation was used as the counting method for tritium in the 1980s, based on the author's personal observations. No documentation has been noted about the earlier systems at RFP, but it seems reasonable to consider that the same method was used in the 1970s.
- [36] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
Numerous tritium results at these levels have been observed by the author in worker's health physics files at the cited levels.
- [37] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
These modifications were implemented by the author in 1973 at RFP. Figure C-18 is an example of the implementation of these modifications.
- [38] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
This interference, though troublesome in real time, is favorable to claimants whose americium lung count results were enhanced by count from <sup>234</sup>Th.
- [39] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
Interferences, especially contamination on the worker's chest, occasionally caused a false positive lung count. This statement was intended to alert the dose reconstructor to this possibility. The sentence is modified in recognition of the fact that an intake could have occurred without resulting in a deposition in the alveolar-interstitial region of the lung.
- [40] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
These modifications were implemented by the author in 1974 at RFP.
- [41] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
This modification was implemented by the author in the early 1980s at RFP.
- [42] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
The cutoff, as defined, is based on limiting the probability of a Type I error (false positive) in the signal domain to 5%. Figure C-22 is an example of the implementation of this decision level.

- [43] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
The worker-specific MDA for the americium *in vivo* measurement depends on the worker's index and the calibration factor K for that index for the detector system used for the worker's lung count. A relatively easy method is to normalize the MDA value for the 1.35 index by the ratios of the calibration factors (given in Attachment B for each detector system) for index 1.35, and the worker-specific index is:

$$MDA_{\text{worker}} = MDA_{1.35} \times K_{1.35}/K_{\text{worker}}$$

An easy method to derive the worker-specific MDA from values listed in Table 5-11 is to use a spreadsheet to plot the MDA values for the three indices, for the detector system of interest, and to determine the equation for an exponential trend line. This equation, in the form  $y = \#.#### e^{\#.#### x}$ , where x is the worker's index and y is the worker-specific MDA, can then be used to calculate the worker-specific MDA.

- [44] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
The recommendation to use the median value of the MDA is consistent with the generic approach adopted by the program. Except for some workers with lung counts only in the 1960s, this situation is expected to be rare.
- [45] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
The recommendation to use an initial value of 100 ppm Am, if the actual value for an intake is not documented, is based on freshly purified plutonium (within 0 to 5 mo, depending on the efficiency of the purification process).
- [46] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
This guidance is based on the consideration that significant intakes of plutonium at RFP were acute intakes, albeit sometimes a set of intermittent acute intakes. After implementation of the body counter in 1965 and as the sensitivity of the system improved, the assignment of the intake date to newly detected depositions, but not from a new intake, was problematic. The dose reconstructor may have generic instructions, especially for efficiency methods, for assigning the intake scenario.
- [47] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
This guidance is presented to support the calculation of the ingrowth of  $^{241}\text{Am}$  after the date of an acute intake or after the start of a chronic intake. After the end of plutonium production activities in 1989, the initial fraction of  $^{241}\text{Pu}$  in RFP plutonium was a decreasing variable based on the age of the plutonium since blending.
- [48] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
These modifications were implemented by the author in 1976 and 1981 at RFP. Figures C-20 and C-21 are examples of the implementation of these modifications.
- [49] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
The validity of this assumption, listed as an uncertainty, seems to be supported by observations that americium lung count measurements for many RFP workers with confirmed lung depositions of plutonium-americium mixtures have remained relatively constant or have slightly increased at decades after the initial short-term clearance period of several years. Recent US Transuranium and Uranium Registries autopsy data for RFP cases also indicate the retention of americium in the lungs that is consistent with this assumption.

- [50] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
The basis for this recommendation is the same as that stated in [31].
- [51] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
Dividing the  $^{238}\text{U}$  MDA by 0.89 accounts for the contribution to the DU MDA from activities of the other uranium isotopes.
- [52] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
If a super-equilibrium situation was operative and the  $^{234}\text{Th}$  lung count result was used to calculate the DU assuming equilibrium, the calculated DU would be higher than the actual activity. Therefore, the situation is favorable to claimants.
- [53] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
This method suggested to estimate the uncertainty of the activity from its MDA is the same as the method suggested in Sections 5.3.1.1.2, 5.3.1.3.2, and 5.3.1.5.2 and is equally applicable.
- [54] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
Because the dose reconstructor is likely to find numerous wound count reports in files of workers assigned to plutonium areas, this statement helps to focus the attention of the dose reconstructor on the most relevant data for quantifying internal doses to organs. The relevant data are cited in the next sentence. The actual wound count and contamination data might be relevant if the cancer site coincided with the site of the wound, an occurrence not yet noted by the author.
- [55] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
The interpretations are those of the author, either gleaned from using the data as an internal dosimetrist at RFP or as the designer and implementer of the reports as part of the technical staff supporting RFP internal dosimetry programs.
- [56] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
The urine data record written on the Urinalysis Record Card preceded the HSDS and was the likely source of the urine data loaded into the HSDS and its mainframe database predecessors. Because there could have been transcription errors during the preparation of the data (punched cards in the 1960s) for loading into the mainframe, the data of the Urinalysis Record Cards (the source data) should be considered the correct data, as recommended.
- [57] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
This recommendation is reasonable because the basis for the change is not known and the change was not made in the HSDS. It is favorable to claimants because the original record is the higher value.
- [58] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
Exceptions to this practice have been observed in the HSDS urinalysis reports for some workers with documented chelation therapy, especially for americium results from analysis of a urine sample also analyzed for plutonium (and the plutonium result was correctly coded with Code 1).
- [59] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
This circumstance is evident in the example reports in Figures C-2, C-3, and especially C-5.

- [60] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
This is presented for information only. The decision of whether to disqualify the result was the call of the laboratory Quality Assurance (QA) officer who reviewed the data and signed the report. The Batch Val code V is the primary indicator of a valid result.
- [61] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
This is presented for information only. In practice, the batch evaluation review would have occurred before the release of the Analytical Report. As noted in [60], the Batch Val code V is the primary indicator of a valid result.
- [62] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
It seems only prudent not to use a result that was invalidated based on failure to meet quality standards.
- [63] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
See narrative for [10].
- [64] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
The offsite laboratory sometimes was not provided the date on which the worker excreted the urine sample. In such cases, the excretion date was written on the report, as was the case for the report in Figure C-8. The guidance for the dose reconstructor is to use the date written on the report if such a situation occurs.
- [65] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
This is presented for information only. The time of the end of the excretion period is not critical for retrospective dose reconstructions. The Integrated Modules for Bioassay Analysis (IMBA) code used by Project dose reconstructors has a default sample time of 12:00 a.m.
- [66] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
The units for fecal and nasal smear sample results are well known to the author from his experience as internal dosimetrist at RFP. In addition, the units are likely to be stated explicitly on other reports in the health physics files of affected workers.
- [67] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
The time of day of the count is not critical for retrospective dose reconstruction. Later lung count reports usually recorded the time of day in this field and noted the count time only if it was different from the standard count for the era, through the 1970s (see Attachment B for the standard count times). Electronically generated lung count reports, starting circa 1981, record the count time used for that count (see Figures C-21 to C-31). The count time would be useful to the dose reconstructor mainly to calculate an MDA for a given lung count, if needed.
- [68] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
The value of the MPLB for plutonium alpha emitters ( $^{239}\text{Pu}$  and  $^{240}\text{Pu}$ ) was calculated using equation (4) in ICRP Publication 2 (ICRP 1959) for an annual dose of 15 rem (0.3 rem/week), organ mass ( $m$ ) = 1,000 g,  $f_2 = 1$ , and  $\epsilon = 53$  (from ICRP Publication 2, Table 5, and based on a relative biological effectiveness = 10).
- [69] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
The main reason the measurements obtained by the detector over gut/liver/below-sternum area are not dosimetrically useful is that a calibration factor was not developed in real time to convert the signal to activity. It was a subjective measurement; i.e., was it normal or high?

- [70] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
This ratio was the subjective rule-of-thumb used by the author in real time at RFP as a supplemental method to discern possible low-level depositions of the plutonium-ameridium mixtures for lung counts performed with the NaI detector system.
- [71] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
The variability in the background in the L X-ray region of the spectrum prevented the establishment of a stable calibration factor for the direct measurement of plutonium via L X-rays. The author was directly involved in this effort.
- [72] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
See, for example, Figure C-22.
- [73] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
This statement reflects the practice to perform a follow-up lung count with a better resolution detector system (i.e., a germanium detector system) when action levels for a count with a poorer resolution, NaI scintillation detector system, such as the phoswich detectors, were exceeded.
- [74] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
See, for example, Figure C-26.
- [75] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
The dose reconstructors are advised to disregard these L X-ray data because the counts were unreliable because of low-end electronic noise. Because of this unsolved problem in real time, a calibration factor to convert from count of plutonium activity was not established.
- [76] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
DOE Order 5480.11, implemented in 1989, shifted the basis from the ICRP Publication 2 approach to control the dose to a critical organ to the ICRP Publication 26 and 30 approach of assessing the committed dose equivalent to organs from intakes (ICRP 1959, 1977, 1979; DOE 1989). The quality factor for alpha radiation was increased from 10 to 20.
- [77] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
This statement is the result of direct observation of information in Figure C-29.
- [78] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
Indeed, not only is the plutonium decision level inoperative because the decision is based on the detection of americium, but also the decision level is never operative for follow-up measurements of a confirmed deposition – there is no decision to be made. A decision level is operative only if the null hypothesis is operative. The null hypothesis is not operative in this example.
- [79] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
This information was provided just in case the dose reconstructor would want to determine the value of the parts per million of the <sup>241</sup>Am used in the calculation.
- [80] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
The ABACOS-Plus<sup>®</sup> software used the date of the count as the default intake date unless an intake date was specifically input for the count. This statement should not be interpreted as guidance to the dose reconstructor to use that default date in dose reconstructions.

- [81] Falk, Roger B. ORAU. Senior Life Scientist. June 2006.  
The only exception to this statement found by the author is the CWT adjustment factor (Equation B-4 in Attachment B) for low indices. For indices less than 0.98, the CWT adjustment is less than 1.00.
- [82] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
D Plant (Building 991) handled "all materials" as a consequence of its function of shipping, receiving, and storage of special nuclear and classified materials for RFP, as well as final assembly and inspection of plutonium and EU products in the early years. For more information, see Historical American Engineering Record Report CO-83-U for Building 991, found on the RFP Web site, <http://192.149.55.183/HAER/base/Buildings/991.htm>.
- [83] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
The method codes are listed at the top of the Urinalysis Record Card (see Figures C-1 to C-3 in Attachment C). Units, if not listed on the card, were discerned from the urine data logs.
- [84] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
This information was discerned from comparing records in the urine data logs with entries on Urinalysis Record Cards.
- [85] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
The tolerance levels were noted as the "Working MDL" in some early urine data logs. The reporting levels were not stated explicitly in the data logs, but rather were discerned from the minimum values calculated in the data logs. These minimum values corresponded to 10% of the Working MDL.
- [86] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
This change in the reporting level for the gross alpha results corresponded to the change to using plutonium as the default analyte rather than EU. The other changes in this paragraph were discerned from the lowest values recorded in the urine data logs.
- [87] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
This statement was based on the examination of the urinalysis records of a number of workers affected by this practice.
- [88] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
These reporting levels were discerned from the lowest values recorded in the americium urine data logs.
- [89] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
This is a description of the general method. How and when the volume adjustments were made for each analyte and period are discussed later in the document.
- [90] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
This is a summary of the observations of the use the recovery determined from the batch spike versus a standard recovery value, based on calculations to reproduce the result in the urine data logs. Additional discussions are provided for the analytes later in the document.
- [91] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
The adjustment of the volume in this manner could have occurred earlier. However, urine data logs for 1955 to 1959 were not found.

- [92] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
This information was provided by Dale L. Bokowski, the lead bioassay chemist at Rocky Flats starting in 1961, in an interview with the author in 1992.
- [93] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
Notations indicating detectors with 40% efficiency started to appear in the urine data logs in August 1964.
- [94] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
This statement is based on the author's direct experience and on discussions with Dale L. Bokowski prior to his retirement in 1992, who was the lead bioassay chemist at Rocky Flats starting in 1961 and also bioassay laboratory manager during the cited period.
- [95] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
The author was directly involved with making this change.
- [96] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
The author was directly involved with a committee of Radiological Health and Analytical Lab personnel in 1993 to implement these changes. Upon further review, the author observed that the count time was increased to 1,440 min (24 hr) rather than the stated 2,000 min. This correction is now made.
- [97] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
This information was provided by Dale L. Bokowski, the lead bioassay chemist at Rocky Flats starting in 1961, in an interview with the author in 1992 prior to his retirement from RFP, and was verified during examination of the urine data logs for the early 1960s.
- [98] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
These values were based on observations made in the urine data logs concerning when the count results were converted to the activity of EU in the sample. Apparently, that decision was based on the count uncorrected by volume, for which the minimum reported activity was 20 dpm/24-hr sample. When a volume adjustment was made, higher minimum reported values up to 28 dpm/24-hr sample were observed.
- [99] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
These values were obtained through calculations by the author to duplicate the results stated in the urine data logs.
- [100] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
The urine data logs for 1964 to 1971 do not distinguish explicitly which samples were for workers in EU areas versus those for workers in DU areas.
- [101] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
This information was discerned by the author from examination of the urine data logs for fluorimetric measurements.
- [102] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
This information was discerned by the author from examination of the urine data logs for electroplating measurements.

- [103] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
This information was provided by Dale L. Bokowski, the lead bioassay chemist at Rocky Flats starting in 1961, in an interview with the author in 1992, prior to his retirement from RFP.
- [104] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
A better way to indicate the generosity of the nonspecificity of the gross alpha result if applied to a specific radionuclide is to use the term "favorable to claimants" rather than "upper bounds."
- [105] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
To have a coherent data set, only background count data for samples counted for 150 min were extracted from the urine data logs.
- [106] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
The composite value was used because the detector background appeared to be reasonably stable in the 1950s and 1960s, as observed in the previous table.
- [107] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
This exception was made for americium because the detector backgrounds for the 1950s did not apply.
- [108] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
This statement is a summary of the observations of the author during the review of the urine data logs.
- [109] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
This approach is consistent with the consideration stated in the fourth bullet in the section headed, "Assessment of MDA."
- [110] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
This subjective observation of the similarities of the recovery values in the preceding table was interesting to the author but was not used to determine any MDA value.
- [111] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
a,b] The distribution of volumes for routine 24-hr urine samples was determined from the volumes recorded in the urine data logs for gross alpha analyses for 1967 and 1971, a data set of 1,437 values. The author chose the gross alpha samples as the sample set least likely to include special samples that could have had an excretion period of less than 24 hr.
- [112] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
Electrodeposited plutonium and americium samples were marked in the data logs with an "E." No similar designation has been observed by the author in any reports of these urinalysis results.
- [113] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
No evidence of a systematic bias in the background or the calibration factor was discerned by the author. Therefore,  $\Delta_B$  and  $\Delta_K$  were set equal to zero.
- [114] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
This information was discerned from the urinalysis data logs by the author.

- [115] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
The decision by the author to assess the MDA based on one aliquant was based on the observation of the data logs that the decision of detection for the overwhelming majority of the samples was based on only one aliquant. Occasionally, the decision was based on the average of two aliquants. Because the MDA for one aliquant is higher than that for two aliquants, this decision is consistent with the consideration stated at the beginning of the "Assessment of MDA" section, fourth bullet.
- [116] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
This statement is based on the personal observations of the author when the recovery of an internal tracer was determined for each urine sample in a batch, even in modern times (post-1993) for batches of samples processed by commercial laboratories with rigorous QA procedures and controls.
- [117] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
This introduction summarizes the information presented in more detail in the body of this TBD. Most of this information is based on the direct experience of the author, who provided technical support to the operations and developments of the *in vivo* lung counting systems at RFP starting in 1970 and extending into the mid-1980s and also from 1989 to 1992. The author also provided second-level management of the dosimetry programs from 1986 to 1989.
- [118] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
The dates for the start of routine operations of the three counting rooms were determined from the references [Room A (Boss and Mann 1967) and Room C (Falk et al. 1979)] or from the author discerning the year that the room was first recorded on a worker's lung count report (Room B).
- [119] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
The information summarized in this section was discerned by the author from (1) notations on lung count reports for workers counted in that era, (2) a transition briefing from Robert W. Bistline, the physicist providing technical support to the Rocky Flats *in vivo* measurement systems 1966-1969, and (3) reports cited in the reference section.
- [120] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
The information in this section describes the lung counting program as found by the author in 1970. The transitions in 1969 were verified by the author in preparation of this report by observations of notations in workers' lung count reports. The transitions did not generally take place exactly on January 1, 1969, but usually sometime in 1968, which was a transition year. However, for the purpose of determining MDAs, the old practice was considered to be extended through the year, and no credit was taken for the new practice until it was in effect for the entire year.
- [121] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
The date of the first entry in the logbook for routine ppm  $^{241}\text{Am}$  determinations for incident samples was observed by the author to be January 3, 1969. This statement does not preclude earlier special ppm  $^{241}\text{Am}$  determinations. Indeed, a special ppm  $^{241}\text{Am}$  determination was made for the October 15, 1965, plutonium fire incident.

- [122] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
The information in this section describes the systems based on the direct involvement of the author and verified by the author from observations of the body count result reports as needed.
- [123] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
The information in this section describes the systems as observed by the author, either directly or indirectly.
- [124] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
The upgrades in this period were implemented by Eugene Potter and Milan Gadd, technical staff supporting the Internal Dosimetry program at Rocky Flats in the 1990s into the 2000s, with discussions with the author, who at that time was a customer of the *in vivo* measurements program as the internal dosimetrist for the medical monitoring program for former radiation workers at RFP. This era is well documented in RFETS (2000b).
- [125] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
The count time, which is the duration of the lung count, was observed by the author from lung count reports for workers in this era.
- [126] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
For this equation and for subsequent equations of the calibration factor K, the calibration factors were normalized to the Lawrence Livermore National Laboratory (LLNL) phantom [also called the Lawrence Livermore Torso Phantom and described in RFETS (2000b)]. Normalizing to this phantom is consistent with the approach described in the second paragraph in Section B.4 of Attachment B because this phantom was used in “the most recent calibration method.”
- [127] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
See section headed 1969 – 1976 and its attribution [4].
- [128 a,b] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
The author personally determined the resolution of the Ortec and Princeton Gamma Tech (PGT) detectors for the 59.5-keV photopeak of the  $^{241}\text{Am}$  gamma and noted the degradation in the resolution. This was expected because the collection efficiency of the charge induced in the active part of the detector diminishes with an increasing volume of that active part (based on the author’s recollection of solid-state physics).
- [129] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
See Table 5-1 in the body of this TBD. The value of 0.0049 had been historically used at the RFP body counter as the rounded value of 0.005.
- [130] Falk, Roger B. ORAU. Senior Life Scientist. July 2006.  
The method of determining the ppm  $^{241}\text{Am}$  from samples representative of the plutonium mixtures involved in possible inhalation incidents, starting in 1969, involved the ratio of the L X-ray photopeaks and the  $^{241}\text{Am}$  59.5-keV photopeak as measured by a NaI(Tl) detector. The ppm  $^{241}\text{Am}$  determined by this method was highly uncertain for values less than 100 ppm and greater than 10,000 ppm because of the counting statistics. Although one might consider zero ppm  $^{241}\text{Am}$  to be the true lower bound for freshly purified plutonium, a zero value is not practical to use in Equation B-17 (i.e., division by zero is not allowed). The value of 100 ppm  $^{241}\text{Am}$  is also supported by its rank at the 10th percentile in the low-to-high ranking of 442

values of the incident ppm recorded in the logbook for January 1969 to September 1972. The value also represents the ingrowth of americium in freshly purified plutonium (within 0 to 5 mo, depending on the efficiency of the purification process).

## REFERENCES

- Berger, C. D., 1988a, *In-Vivo Assessment of Plutonium, Americium, and Uranium at the Rocky Flats Plant*, IT Corporation/Radiological Sciences Laboratory, Oak Ridge, Tennessee, July 27.
- Berger, C. D., 1988b, *Assessment of Radioactivity in Wounds at the Rocky Flats Plant*, IT Corporation/Radiological Sciences Laboratory, Oak Ridge, Tennessee, July 27.
- Bistline, R. W., 1968, *A Method for Predicting Subject Background for In Vivo Plutonium Measurements*, RFP-893, The Dow Chemical Company, Rocky Flats Division, Golden, Colorado, November 19.
- Boss, M. R., and J. R. Mann, 1967, "Body Counter Evaluations of Plutonium Exposures," *Health Physics*, Volume 13, pp. 259-266.
- Daugherty, N. M., R. B. Falk, F. J. Furman, J. M. Aldrich, and D. E. Hilmas, 2001, "Former Radiation Worker Medical Surveillance Program at Rocky Flats," *Health Physics*, June 2001, Volume 80, Number 6, pp. 544–551. [SRDB Reference ID 22040]
- DOE (U.S. Department of Energy), 1980, *Final Environmental Impact Statement Rocky Flats Site*, Volume 1, DOE/EIS-0064, Washington, D.C.
- DOE (U.S. Department of Energy), 1989, *Radiological Protection for Occupational Workers*, Order 5480.11, Washington, D.C.
- Falk, R. B., 1993, *Guidelines for Dose Reconstruction for Plutonium Internal Exposures at Rocky Flats*, Draft Report, EG&G Rocky Flats, Golden, Colorado.
- Falk, R. B., 2004, *Conversion from Mass Median Diameter to Activity Median Aerodynamic Diameter for Plutonium Oxide*, Unpublished Report, February 3.
- Falk, R. B., W. H. Tyree, C. B. Wood, and C. R. Lagerquist, 1979, "A System of High-Purity Germanium Detectors for the Detection and Measurement of Inhaled Radionuclides," in *Advances in Radiation Protection Monitoring*, IAEA-SM-229/54, pp. 445-457, International Atomic Energy Agency, Vienna.
- HPS (Health Physics Society), 1995, *An American National Standard – Bioassay Programs For Uranium*, HPS N13.22-1995.
- HPS (Health Physics Society), 1996, *An American National Standard – Performance Criteria for Radiobioassay*, HPS N13.30-1996.
- ICRP (International Commission on Radiological Protection), 1959, *Report of ICRP Committee II on Permissible Dose for Internal Radiation*" Publication 2, Pergamon Press, New York, New York.
- ICRP (International Commission on Radiological Protection), 1977, *Recommendations of the International Commission on Radiological Protection*, Publication 26, Pergamon Press, Oxford, England.
- ICRP (International Commission on Radiological Protection), 1979, *Limits for Intakes of Radionuclides by Workers*, Publication 30, Part 1, Pergamon Press, Oxford, England.

- ICRP (International Commission on Radiological Protection), 1994a, *Dose Coefficients for Intakes of Radionuclides by Workers*, Publication 68, Pergamon Press, Oxford, England.
- ICRP (International Commission on Radiological Protection), 1994b, *Human Respiratory Tract Model for Radiological Protection*, Publication 66, Pergamon Press, Oxford, England.
- James, W. H., 1990, "Isotopic Profile of Rocky Flats Plutonium," interoffice correspondence, EG&G Rocky Flats, Golden, Colorado, February 28.
- Lawrence, J. N. P., 1984, *Uranium Internal Exposure Evaluation Based on Urine Assay Data*, LA-10246-MS, Los Alamos National Laboratory, U.S. Department of Energy, Los Alamos, New Mexico.
- Lederer, C. M., and V. S. Shirley (editors), 1978, *Table of Isotopes, Seventh Edition*, Lawrence Berkeley Laboratory, University of California, Berkeley, California, and John Wiley & Sons, New York, New York.
- Mann, J. R., and R. A. Kirchner, 1967, "Evaluation of Lung Burden Following Acute Inhalation Exposure to Highly Insoluble PuO<sub>2</sub>," *Health Physics*, Volume 13, pp. 877–882.
- NIOSH (National Institute for Occupational Safety and Health), 2002, *Internal Dose Reconstruction Implementation Guideline*, Rev. 0, Office of Compensation Analysis and Support, Cincinnati, Ohio, August.
- RFETS (Rocky Flats Environmental Technology Site), 1992, *ALPHA QCBLK2.LIS;1, Computer Data Report 16-JAN-1992*, U.S. Department of Energy, Golden, Colorado.
- RFETS (Rocky Flats Environmental Technology Site), 1998a, "Uranium," *Internal Dosimetry Technical Basis Documentation*, Section 1, Version 3, U.S. Department of Energy, Golden, Colorado.
- RFETS (Rocky Flats Environmental Technology Site), 1998b, *Statement of Work for Analytical Measurements*, General Bioassay Service Module BA01-B.4, U.S. Department of Energy, Golden, Colorado.
- RFETS (Rocky Flats Environmental Technology Site), 1998c, "Other Isotopes," *Internal Dosimetry Technical Basis Documentation*, Section 1, Version 3, U.S. Department of Energy, Golden, Colorado.
- RFETS (Rocky Flats Environmental Technology Site), 1998d, "In-Vitro Radiobioassay," *Internal Dosimetry Technical Basis Documentation*, Section 2, Version 3, U.S. Department of Energy, Golden, Colorado.
- RFETS (Rocky Flats Environmental Technology Site), 2000a, *Report on the Flow of Recycled Uranium at the Department of Energy's Rocky Flats Plant 1953—1993*, U.S. Department of Energy, Golden, Colorado, June 30.
- RFETS (Rocky Flats Environmental Technology Site), 2000b, "In-Vivo Radiobioassay," *Internal Dosimetry Technical Basis Documentation*, Section 3, Version 8, U.S. Department of Energy, Golden, Colorado.

RFETS (Rocky Flats Environmental Technology Site), 2002, "Plutonium and Americium," *Internal Dosimetry Technical Basis Documentation*, Section 1, Version 6, U.S. Department of Energy, Golden, Colorado.

## GLOSSARY

### alpha particles

Positively charged particles of discrete energies emitted by certain radioactive materials; alpha particles usually expend their energy in short distances and will not usually penetrate the outer layer of skin; they are a significant hazard only when taken into the body where their energy is absorbed by tissues.

### curie

A special unit of activity. One curie equals  $3.7 \times 10^{10}$  nuclear transitions per second.

### detection limit (lower)

The minimum quantifiable exposure or neutron flux that can be detected.

### dosimetry

The science of assessing absorbed dose, dose equivalent, effective dose equivalent, etc., from external or internal sources of radiation.

### exposure

As used in the technical sense, exposure refers to a measure expressed in roentgens (R) of the ionization produced by photons (i.e., gamma and X-rays) in air. As used in internal dosimetry, an encounter with uncontained radioactive material.

### extremity

That portion of the arm extending from and including the elbow through the fingertips, and that portion of the leg extending from and including the knee and patella through the tips of the toes.

### gamma rays

Electromagnetic radiation (photons) originating in atomic nuclei and accompanying many nuclear reactions (e.g., fission, radioactive decay, and neutron capture). Physically, gamma rays are identical to X-rays of high energy, the only essential difference being that X-rays do not originate in the nucleus.

### isotope

Elements having the same atomic number but different atomic weights; identical chemically but having different physical and nuclear properties.

### L X-rays

Low-energy X-rays produced during radioactive decay.

### maximum permissible lung burden (MPLB)

The occupational limit for plutonium expressed in terms of a quantity of plutonium that could be present in the pulmonary lungs at any given time.

### minimum detectable activity (MDA)

Limit of radionuclide activity detection for measurements of specific types and energies of radiation.

**photon**

A unit or particle of electromagnetic radiation; photons originating from the nucleus or extra-nuclear material of an atom are called respectively gamma rays or X-rays.

**radiation**

Alpha, beta, neutron, and photon radiation.

**radioactivity**

The spontaneous emission of radiation, generally alpha or beta particles, gamma rays, and neutrons from unstable nuclei.

**radionuclide**

A radioactive isotope of an element, distinguished by atomic number, atomic weight, and energy state.

**rem**

A unit of dose equivalent equal to the product of the number of rad and the quality factor.

**whole-body dose**

Commonly defined as the absorbed dose at a tissue depth of 1.0 cm (1,000 mg/cm<sup>2</sup>); however, also used to refer to the recorded dose.

**X-ray**

Ionizing electromagnetic radiation of external nuclear origin.

**ATTACHMENT A**  
**MINIMUM DETECTABLE ACTIVITY FOR URINALYSIS METHODS AT ROCKY FLATS**  
Page 1 of 20

Roger B. Falk  
Senior Life Scientist  
Oak Ridge Associated Universities

Originally submitted as draft on June 5, 2003

**TABLE OF CONTENTS**

A.1	Introduction.....	54
A.2	MDA Methodology.....	54
A.3	History of Methods.....	55
A.4	Assessment of MDA.....	61
A.5	MDA Values.....	66
A.6	Discussion.....	73
A.7	Acknowledgments.....	73

## ATTACHMENT A MINIMUM DETECTABLE ACTIVITY FOR URINALYSIS METHODS AT ROCKY FLATS

Page 2 of 20

### A.1 INTRODUCTION

Urinalysis has been used at RFP since the start of operations in 1952 to detect intakes of radionuclides by workers who were exposed, or had the potential to be exposed, to plutonium, EU, or DU. Urinalysis involved the submission of a urine sample by the worker, a chemical processing of the sample to isolate the radionuclide of interest (the analyte), and measurement and calculation of the quantity (or activity) of the analyte in the sample. The request for submission of the urine was either scheduled as part of a routine monitoring program or was specially requested following an actual or suspected intake. Routine urine samples were typically 24-hr excretions, either one continuous 24-hr period (but not taken at the RFP site) or two 12-hr periods. Special urine samples could be 24-hr samples, overnight samples, or a single voiding. The chemical processing of the sample depended on the analyte and the need for specificity and recovery. *Specificity* refers to separation of the desired radionuclide from interferences such as other radionuclides. *Recovery* refers to isolating as much of the analyte as possible in the final medium to be measured (counted). The measurement of the sample typically involved counting the alpha radiation from the processed aliquant of the sample and determining the activity of the analyte in the original sample. Also involved was the fluorometric measurement of mass of DU. The assessment of the MDA involves the determination of the activity of the analyte in the original urine sample that would be expected to be detected by the methods and systems used at RFP from 1952 to the present. The analytes of interest are plutonium, americium, EU, and DU. Also addressed is a category called gross alpha, which was a nonspecific analysis used for workers from 1952 to 1971 who were potentially exposed to any of the analytes of interest. This attachment focuses on the period from 1952 to 1971, for which many of the urinalysis logs have been located and analyzed to obtain the information needed to assess the MDA. This also is the period when urinalysis procedures were primitive and evolving and numerous dosimetrically interesting events and intakes were occurring at RFP.

### A.2 MDA METHODOLOGY

The general equation for the MDA is Equation 6 in the American National Standard, *Performance Criteria for Radiobioassay* (HPS 1996):

$$\text{MDA} = (1 + \Delta_K) (2\Delta_B B + 2k s_o + 3) \div KT \quad (\text{A-1})$$

where:

B = the total count of the appropriate blank

$s_o$  = the standard deviation in the net count of a sample with no additional analyte:

$$s_o = \sqrt{[s_{B1}^2 + (1/m^2) s_{B0}^2]} \quad (\text{A-2})$$

where:

$s_{B1}$  = the standard deviation of the sample, where the sample contains no actual analyte above that of the appropriate blank

$s_{B0}$  = the standard deviation in the unadjusted count of the appropriate blank

m = the adjustment factor for the appropriate blank

**ATTACHMENT A**  
**MINIMUM DETECTABLE ACTIVITY FOR URINALYSIS METHODS AT ROCKY FLATS**  
Page 3 of 20

- K = calibration factor
- $\Delta_K$  = the maximum fractional systematic error bound in the calibration factor K
- $\Delta_B$  = the maximum expected fractional systematic error bound in the appropriate blank
- k = the abscissa of the standardized normal distribution corresponding to the 0.05 probability level (for  $\alpha = 0.05$  and  $\beta = 0.05$ ,  $k = 1.645$ )
- T = the standard counting time for the procedure.

Applying this equation to urinalysis methods at RFP involves determining the value of each variable for measurements of the analytes: plutonium, americium, EU, DU, and gross alpha, as the methods evolved.

### A.3 HISTORY OF METHODS

#### General Information

In the beginning of operations (1952), RFP was divided into four distinct subplants plus a general support area. The subplants were named A Plant, B Plant, C Plant, and D Plant. The designations A, B, C, and D are significant because they are also the code names for the materials processed in those plants as well for the urinalysis procedures used to analyze those materials. The records of the 1950s do not contain the words “depleted uranium,” “enriched uranium,” and “plutonium.” Instead, DU is A material processed in A Plant (buildings numbered 4##, mainly Building 444); EU is B material processed in B Plant (buildings numbered 8##, mainly Building 881); and plutonium is C material processed in C Plant (buildings numbered 7##, mainly Building 771). D Plant (buildings numbered 9##, mainly Building 991) handled all materials [82]. A nonspecific gross alpha urinalysis method was used for workers in D Plant. [Note: Building numbers were two-digit numbers until 1968, when the numbers were expanded to three digits (e.g., Building 771 was originally Building 71)] From 1962 to 1963, the EU operations were phased out at RFP, although urinalysis monitoring for EU continued through 1971.

The Urinalysis Record Card is an important and significant record for the early (1952 to 1969) urine data and methods that generated those data for a specific worker. A Urinalysis Record Card was established for each monitored worker and included the result of each urine sample, the date of the sample, and the code of the urinalysis method used to generate that result are recorded. The card is now in the worker’s Health Physics file, which is the primary RFP record of dosimetry information for a worker. Table A-1 lists the method codes [83].

Table A-1. Method codes.

Code	Meaning
A	Fluorimeter, reported in $\mu\text{g/L}$ (1952–1956); reported in $\mu\text{g}/24 \text{ hr}$ (1957–1964)
B <sub>1</sub>	Electroplating, reported in dpm/24 hr. (Note: Electroplating, in RFP records, more properly should be called electrodeposition.)
B <sub>2</sub>	Ether extraction, reported in dpm/24 hr
B <sub>3</sub>	TBP extraction (hand-written on some cards)
C <sub>1</sub>	Carrier precipitation, reported in dpm/24 hr
C <sub>2</sub>	TTA extraction, reported in dpm/24 hr. (Note: On the header of cards for 1961–1965, the code C <sub>2</sub> is “Pu by Radio Autography.” There is no indication that this method was implemented at RFP.)
D	TBP extraction

## ATTACHMENT A MINIMUM DETECTABLE ACTIVITY FOR URINALYSIS METHODS AT ROCKY FLATS

Page 4 of 20

Although there is some correlation of the codes with the subplants, there are some exceptions. Table A-2 summarizes the correlation of the method code and the analyte [84].

Table A-2. Correlation of method code and analyte.

Analyte	Method code
Depleted uranium	A, B <sub>1</sub> (starting 5/1/64)
Enriched uranium	B <sub>1</sub>
Plutonium	C <sub>1</sub> , C <sub>2</sub>
Gross alpha	B <sub>2</sub> , B <sub>3</sub> , D

Tolerance levels were used at RFP in the 1950s and 1960s as an indicator of the maximum permissible amount (activity) of a radionuclide excreted per day in a worker's urine. The technical basis for the values of tolerance levels used at RFP has not been identified. The significance is that urinalysis results less than 10% of the tolerance level were recorded and reported as background (BK on the Urinalysis Record Card) or zero, regardless of the underlying sensitivity of the method, with some exceptions. Table A-3 lists the values of the tolerance levels [85]:

Table A-3. Values of tolerance and reporting levels

Analyte	Tolerance level	Reporting level
Depleted uranium	58 µg/24 hr	≥ 5.8 µg/24 hr
Enriched uranium	88 dpm/24 hr	≥ 8.8 dpm/24 hr
Plutonium	8.8 dpm/24 hr	≥ 0.88 dpm/24 hr
Gross alpha	88 dpm/24 hr	≥ 8.8 dpm/24 hr

These reporting (and recording) levels continued through April 1964 for both DU and EU, through 1961 for plutonium, and through 1963 for gross alpha. From May 1964 through 1971, the reporting level for DU and EU was ≥20 to 28 dpm/24 hr. After 1963, the reporting level for gross alpha was ≥0.9 dpm/24 hr [86].

For plutonium, the reporting and recording level was ≥0.2 dpm/24 hr for 1962 to April 6, 1970. After that date, all results ≥0.00 dpm/24 hr were recorded and reported. Negative values were recorded and reported as 0.00 dpm/24 hr. A further exception is that, for some workers, the practice implemented on April 7, 1970, was applied retroactively for their plutonium data. This retroactive application was variable with respect to how far back it was applied [87].

In 1963, a specific analysis for <sup>241</sup>Am was implemented. The recording and reporting level for <sup>241</sup>Am was ≥0.24 dpm/24 hr in 1963, ≥0.2 dpm/24 hr from 1964 to 1967, and ≥0.3 dpm/24 hr from 1968 to 1971 [88].

The general method for data analysis for alpha counting procedures (1952 to 1971) was:

$$\text{Activity (dpm/24-hr sample)} = (C/T - B_{\text{Det}} - B_{\text{Blk}}) \times (V/A) / (\epsilon \times R) \quad (\text{A-3})$$

where:

- C = Total count
- T = Count time (min)

**ATTACHMENT A**  
**MINIMUM DETECTABLE ACTIVITY FOR URINALYSIS METHODS AT ROCKY FLATS**

Page 5 of 20

- B<sub>Det</sub> = Detector background count rate (cpm)
- B<sub>Blk</sub> = Reagent blank count rate (cpm)
- V = Sample (or standard) volume (mL)
- A = Volume of the aliquant analyzed (or volume of the sample, if the entire sample was analyzed) (mL)
- ε = Efficiency (geometry) of the detector (cpm per dpm)
- R = Recovery, fraction of the analyte in the aliquant or sample that is transferred to the planchet or disk to be counted

The detector background count rate was generally tabulated in the urinalysis data logs through 1961. After 1961, the value used for the detector background is implicit in the data reduction but is not explicitly recorded. The same detectors were used for alpha counting for all analytes.

Reagent blanks were generally processed with each batch of samples, and the value of the blank count rate used in the data reduction was generally tabulated in the urinalysis data logs.

The ratio (V/A) is a volume adjustment factor used for two purposes. If the entire sample was not analyzed, this ratio normalizes the result from the volume of the aliquant analyzed to the total sample. If the volume of the total sample was less than a minimum specified volume (e.g., 1,000 mL), the sample was considered to be less than a 24-hr sample, and the ratio was used to normalize the sample result to that for a 24-hr sample [89]. The sample volume was recorded in the urinalysis data log for each sample.

The value of ε was the geometry rating of the detector. In 1952 and 1953, ε was 0.45. After that, the detectors were called 50% detectors, and ε was 0.50. In 1964, 40% detectors (ε = 0.40) were added to the system as a supplement to the 50% detectors.

The value of R was generally a standard value. Depending on the process, spiked samples (samples to which a known activity of the analyte was added) were generally processed with each batch of samples. The recovery values calculated from the spiked samples were the ratios of the count rate of spiked sample to the average count rate of four to six samples deposited on the planchet or plate with minimal processing. The recovery values for the spiked samples were not normalized to the activity (dpm) deposited. In addition, the recovery values from the spikes usually were not used to customize the standard value of R for samples in the batch [90].

The fraction of absorption of the alpha particles in the residue on the planchet or plate was not explicitly incorporated either in the efficiency or recovery.

The term ε × R was frequently combined, especially in the 1950s. In the 1960s, the term 1/(ε × R) was occasionally tabulated in the urinalysis data logs as R.F., presumably for recovery factor, and was used as a multiplier to convert the net count per minute to activity in the sample.

The general method for the mass measurements of uranium using the fluorimeter (1953 to 1964) was:

$$\text{Mass } (\mu\text{g}/24\text{-hr sample}) = (S - B_{\text{Blk}}) \div K \quad (\text{A-4})$$

**ATTACHMENT A**  
**MINIMUM DETECTABLE ACTIVITY FOR URINALYSIS METHODS AT ROCKY FLATS**

Page 6 of 20

where:

- S = Signal reading of the sample aliquant  
B<sub>Bik</sub> = Signal reading of the blank  
K = Constant/V [The constant is custom to each process. V = Volume (mL) of the entire urine sample. If the sample volume ≤ 1,000 mL, V = 1,000 mL.]

The history of these urinalysis methods is largely based on an interview with the lead chemist for the bioassay program from 1961 to 1992, Dale L. Bokowski, in 1992 prior to his retirement from RFP, and on a review of the bioassay data logs from 1952 to 1971.

### Plutonium

#### 1952 to 1961

The urine sample was processed using a method called carrier precipitation (also called coprecipitation). The plutonium in the urine sample (plus some americium and thorium) was carried into the precipitate with lanthanum fluoride. The precipitate was dissolved and the solution was evaporated on a planchet, which was counted with a gas-flow proportional counter. Typical count time was 150 min. A spike sample and a reagent blank sample were processed with the workers' samples, sometimes with each batch and sometimes less frequently. The result of the spike sample may have been used to establish the value of the recovery of the analyte for the batch. Similarly, the result of the blank (counts per minute) may have been used to establish the value of the blank subtracted from the total count rate of the sample. Detector efficiency was stated to be 0.50. A volume adjustment factor (1,200/sample volume) was applied as a multiplier to the result if the sample volume was less than 1,000 mL. The first evidence of the use of this factor is in 1960 [91].

#### 1961 to 1962

Starting on December 13, 1961, a TTA extraction step was added to the carrier precipitation method to improve the specificity of the process to isolate plutonium [92]. No other changes were made to the previous method.

#### 1963 to 1978

The ion exchange method replaced the carrier precipitation/TTA extraction method in 1963 and was used, with refinements, thereafter. The method was plutonium-specific. In addition, americium could be recovered separately from the plutonium in the same sample. Evaporation of the analyte on a planchet was continued, but that method was gradually phased out and replaced by electrodeposition on a stainless-steel disk. About one-third of the samples were electrodeposited in 1964 and one-half or more from 1967 to 1971. In 1973, an alpha PHA counting system with surface barrier detectors was started with four detectors. The practice of using internal tracers (<sup>236</sup>Pu or <sup>242</sup>Pu) for some plutonium samples was begun concurrently. A batch blank continued to be processed, although its use was inconsistent. For example, in 1971, a blank count rate of 0.00 cpm was used even though the median value of the batch blank was 0.06 cpm. In 1964, detectors with an efficiency of 0.4 were used as a supplement to the detectors with 0.5 efficiency [93].

#### 1978 to 1993

By 1978, all of the counting systems had been converted to the PHA system, and all of the plutonium samples were processed with internal tracers. The fraction of the internal tracer recovered for that

## ATTACHMENT A MINIMUM DETECTABLE ACTIVITY FOR URINALYSIS METHODS AT ROCKY FLATS

Page 7 of 20

sample was applied in the analysis of the result for that sample. The acceptable range of the fractional tracer recovery was 0.10 to 1.10. The result of a sample was invalidated if the recovery was outside the acceptable range [94]. In 1990, the acceptable recovery range was changed to 0.35 to 1.10 [95]. The count time of 720 min was used for all samples. A batch blank continued to be processed and generally was used in the data analysis unless suspected to have been contaminated excessively (a subjective decision). In 1985, the blank method was modified. The value of the blank used in the analysis of the result for a sample was the average value of the last 20 valid batch blanks. To be valid, a batch blank value was tested using the Dixon outlier test and, if it passed the test, was added to the population of the last 20 blanks. In 1988, the blank process was further modified by use of the Winsorized trimmed mean of the population of 20 blanks instead of the average value. The purpose of these modifications was to minimize the influence of laboratory contamination artifacts, which were considered to be nonrandom events that, if incorporated in the blank, would inappropriately bias the results of the other samples on the low side. In addition, the reagent blank was replaced by a matrix blank, either real or artificial urine. The volume of the sample analyzed (aliquant) was 800 mL if the volume of the sample was greater than 800 mL, or the entire sample if the volume of the sample was less than 800 mL. The result of the aliquant was divided by the volume fraction (800 mL/volume of the sample) if the volume of the sample was  $\geq 800$  mL. The efficiency of the detectors was typically in the range of 0.25 to 0.35.

### 1993 and beyond

Upgrades to procedures occurred in 1993 in order to achieve a process MDA less than or equal to 0.020 dpm/sample [96]. Count time was increased to 1,400 min. The entire sample was analyzed so that the volume fraction was unity for all samples. In addition, a contract was established with a commercial bioassay laboratory, with a requirement that an MDA  $\leq 0.02$  dpm/sample be achieved. In 1997, the onsite bioassay laboratory was shut down.

### Americium (1963 and beyond)

Except for the details of the chemistry, the process for americium was similar to that described for plutonium. A solvent extraction process, specific for americium, was first used in 1963 [97]. A new process (not defined in the data log) was started in November 1965. At some point, not defined in the examined data logs, the ion exchange method was implemented for americium.

### Enriched Uranium (1952 to 1971)

Urine samples were analyzed for EU according to a process called electroplating. A 50-mL aliquant of urine was extracted from the 24-hr sample and chemically processed to minimize impurities. The resulting solution was poured into an electrodeposition column, and the uranium was deposited on a stainless-steel disk. The disk then was counted for alpha radiation with the gas flow proportional counters, as described for plutonium. Counting times used in this period were 30, 40, 60, 70, 90, 120, and 150 min.

From 1952 to 1955, one aliquant per sample was used. In 1960, a second aliquant was processed if the result of the first aliquant was  $\geq 7$  dpm/24-hr sample. If the second result was within a specified range of the first result, the average of the two results was recorded and reported. If the second result was out of the specified range, a third aliquant was processed, and the average of the two results that best confirmed each other was used. If that average was less than the reporting level of 8.8 dpm/24 hr, the result was recorded and reported as background. From 1961 to 1971, two aliquants routinely were processed for each urine sample, with a third aliquant (1961 to 1969) processed if the spread of

## ATTACHMENT A MINIMUM DETECTABLE ACTIVITY FOR URINALYSIS METHODS AT ROCKY FLATS

Page 8 of 20

the results of the first set was outside the specified range. The recording and reporting logic was the same as that for 1960. From 1964 to 1971, the recording and reporting limit appears to be  $\geq 20$  to 28 dpm/24-hr sample, depending on the volume of the sample [98].

Blank data were not used to adjust the sample count rate, except sporadically in 1963 and 1964. Detector background was usually subtracted, but not always. Spike samples were processed, although it is not obvious how those data were used, if at all. Instead, a constant value of the product of the detector efficiency ( $\epsilon$ ) and the recovery (R) was used: 0.40 (1953 to 1955 and 1971), 0.30 (1960 to 1970), and 0.24 (1964 to 1970 for detectors with  $\epsilon = 0.40$ ) [99].

EU operations were phased out at RFP from 1962 to 1963, although some workers were still monitored for EU intakes through 1971 [100].

### **Depleted Uranium (1952 to 1971)**

Two methods were used to analyze urine samples for DU. From 1952 to April 1964, a fluorimeter was used to measure the mass (micrograms) of uranium in a 100 $\lambda$  (0.1-mL) aliquant of the 24-hr urine sample. The result was extrapolated to the total sample and reported in the unit of  $\mu\text{g}/24$  hr sample. A volume adjustment was made if the sample volume was less than 1,000 mL. If less than 1,000 mL, the volume was set equal to 1,000 mL.

Screening was done with one aliquant. A second aliquant was processed if the net reading of the first aliquant was greater than or equal to a value in a chart correlated with the volume of the 24-hr urine sample. A third aliquant was processed if the results (net readings) of the first two aliquants varied by 20% or more. The average result of the two aliquants that agreed was converted to  $\mu\text{g}/24$ -hr sample and reported only if the result was greater than or equal to the reporting level, 5.8  $\mu\text{g}/24$ -hr sample. Otherwise, the result was reported as background [101].

After April 1964, the urine sample was analyzed using the electroplating procedure described above for EU, and the results were reported in dpm/24-hr sample (or background) [102].

### **Gross Alpha (1952 to 1971)**

Two methods were used to analyze urine samples for gross alpha counts from either plutonium or uranium. The ether extraction method was used from 1952 to December 12, 1962, and the TBP extraction method was used from December 12, 1962, to 1964. The TBP method was replaced by the TOPO method. All methods were nonspecific in extracting plutonium and uranium as well as americium and natural thorium [103].

In all methods, the entire urine sample was processed, and the final extract was evaporated on a planchet and counted on the gas-flow proportional counter. Counting time was typically 150 min, although from 1952 to 1955 count times of 55, 60, and 75 min, and in 1971 count times of 40 and 60 min, were also used.

Samples with results  $\geq 0.9$  dpm/24-hr sample typically, but not always, were counted using a PHA system to determine whether to credit the result to EU or to plutonium, or a portion to each. The default condition, through 1963, was to credit the result to EU unless the PHA count indicated otherwise. After 1963 (when EU operations were phased out), the default condition was to credit the

**ATTACHMENT A**  
**MINIMUM DETECTABLE ACTIVITY FOR URINALYSIS METHODS AT ROCKY FLATS**  
Page 9 of 20

result to plutonium. In either case, the results should be considered upper bounds because of the nonspecificity of the analysis [104].

**A.4 ASSESSMENT OF MDA**

**General Considerations**

The MDA is assessed for plutonium, americium, EU, DU, and gross alpha, based on Equation A-1 and the values of parameters for the methods. Some considerations are:

- The probabilities of Type I (false positive) and Type II errors (false negative) are each 5% ( $\alpha = \beta = 0.05$ ).
- The MDA is assessed for the typical, average, or median condition. If appropriate, the MDA is also assessed for the 5th- or 95th-percentile conditions.
- The MDA is assessed for the methods as they should have been performed, with regard to such factors as alpha transmission factor, blank subtraction, recovery fraction, and volume adjustment.
- For methods with two or more options in the same period (e.g., evaporation vs. electrodeposition, 40% detectors vs. 50% detectors), the option that gives the higher MDA is used.

The value of the MDA for the typical, average, or median condition pertains to the process and indicates the amount or activity in the population of urine samples that would have been detected with a 95% probability, given a properly set decision criterion that allows a 5% probability of a Type I error. In reality, the decision criterion (and method) at RFP was not based on the probability of a Type I error. Instead, an arbitrary level (10% of the tolerance level or any non-negative value) was used as the decision criterion for recording and reporting detected amounts or activities.

The value of the MDA for the 5th- or 95th- percentile conditions pertains to individual samples for which the conditions of the sample (e.g., low volume) or conditions of the processing (low recovery, high blank, high alpha self-absorption) were marginal. The conditions of low recovery, low volume, and high alpha self-absorption are associated with the calibration factor K and can be incorporated either in the value of K or in the value of  $\Delta_K$ .

Table A-4 lists sample volumes for routine 24-hr urine samples.

Table A-4. Sample volumes for routine 24-hour urine samples.

<b>Median</b>	<b>1,350 mL</b>
5th percentile	700 mL
95th percentile	1,750 mL

The values for the parameter values for the processes were obtained through review of the urine data logs for the periods from 1952 to 1955 and 1960 to 1971. For some years in these periods, logs for only a part of the year were available.

**ATTACHMENT A**  
**MINIMUM DETECTABLE ACTIVITY FOR URINALYSIS METHODS AT ROCKY FLATS**  
Page 10 of 20

**Data for Alpha Counting Systems**

Table A-5 lists the detector background (cpm) for the gas flow proportional counters, based on tabulations in the urine data logs from 1952 to 1955 and from 1960 to 1963, for a sample count time of 150 min [105]:

Table A-5. Detector background for gas flow proportional counters.

	Detector background (cpm)			
	Average	5th percentile	Median	95th percentile
1950s	0.060 ±0.022	0.02	0.06	0.10
1960s	0.054 ±0.014	0.03	0.05	0.08
Composite	0.056 ±0.017	0.03	0.05	0.08

No documentation was found about the count time used to measure the detector background, but the count time is likely to be 150 min or longer. For the purpose of assessing the MDA, the composite average is used for the value of the detector background count rate,  $B_{Det} = 0.056$  cpm, with the standard deviation  $s_{Det} = 0.017$  cpm for all alpha counting methods (except for americium) and for all sample count times [106]. For americium, the values for the 1960s are used because the americium process was not implemented in the 1950s [107].

The blank count rate is method-specific, and the application of the blank in the data analysis was variable between methods and within a method over time. The confounder was the intermittent, but persistent, laboratory contamination artifacts introduced into blanks and worker samples. These artifacts caused false positives from a worker exposure viewpoint but real positives from a detection viewpoint. In practice, high blank values (a subjective decision) were generally ignored, and suspect (unexpectedly high) sample results were either confirmed or overruled by recounting, resampling, or analyzing another aliquant [108].

For the purpose of this MDA analysis, the median value of the blank is used to determine the process MDA and the 95th-percentile (low to high) value is used to determine the MDA for the more extreme conditions. Table A-6 summarizes the median and 95th-percentile blank count rates.

Table A-6. Median and 95th-percentile blank count rates.

Analyte	Period	Blank cpm	
		Median	95th percentile
Plutonium	1952–1971	0.06	0.28
Enriched uranium	1952–1971	0.05	0.22
Depleted uranium	1964–1971	0.05	0.22
Americium	1963–1971	0.07	0.26
Gross alpha	1952–1971	0.08	0.30

These values are the average of the yearly values extracted from available urine data logs (as reviewed by R. Falk, 2003). For each of the analytes, the yearly median and 95th-percentile values did not differ enough over the period to warrant a separate MDA analysis. The blank values for EU and DU are based on log entries in 1963 and 1964 for cell blank checks for the electrodeposition process.

**ATTACHMENT A**  
**MINIMUM DETECTABLE ACTIVITY FOR URINALYSIS METHODS AT ROCKY FLATS**

Page 11 of 20

The value of the blank count rate,  $B_{\text{Blk}}$ , is taken from Table A-6 for the given analyte. The standard deviation,  $s_{\text{Blk}}$ , is taken to be the square root of the blank count for the process divided by the count time of the process:

$$s_{\text{Blk}} = (1/T) \sqrt{B_{\text{Blk}} \times T} \quad (\text{A-5})$$

The values for  $B$ ,  $s_{\text{B0}}$ ,  $s_{\text{B1}}$ , and  $s_o$  in the MDA equation (A-1) are derived from the detector background and blank values:

$$B = (B_{\text{Det}} + B_{\text{Blk}}) \times T \quad (\text{A-6})$$

$$s_{\text{B0}} = T \times \sqrt{(s_{\text{Det}}^2 + s_{\text{Blk}}^2)} \quad (\text{A-7})$$

$$s_{\text{B1}} = \sqrt{B} \quad (\text{A-8})$$

$$s_o = \sqrt{(s_{\text{B1}}^2 + s_{\text{B0}}^2)} \quad (\text{A-9})$$

For some analytes (EU, DU) and periods, the detection decision was based on the average of two aliquants. In this case, the value of  $s_o$  for the average of two aliquants is equal to the value of  $s_o$  for one aliquant divided by the square root of 2.

The value of  $\Delta_B$  is taken to be zero. This variable could be used to account for high blank values. Instead, the effect of high blank values is determined by using the 95th-percentile value of the blank.

The calibration factor  $K$  is a combination of the detector efficiency  $\epsilon$ , the recovery  $R$ , and the volume adjustment factor ( $V/A$ ). Also included is a factor that accounts for absorption of alpha particles in the residue of planchets or plates.

Common detectors were used for all alpha-counting methods. Table A-7 lists the efficiencies of the detectors (as noted above):

Table A-7. Efficiencies of alpha-counting detectors.

Period	Detector efficiency
1952–1953	0.45
1954–1963	0.50
1964–1971	0.40 and 0.50

For 1964 to 1971, the value of 0.40 is used as the efficiency for the MDA calculation [109].

Table A-8 lists the recoveries used in the MDA assessment, which are taken to be the median recovery and the 5th-percentile (low to high) value discerned from the spike data for the process.

**ATTACHMENT A**  
**MINIMUM DETECTABLE ACTIVITY FOR URINALYSIS METHODS AT ROCKY FLATS**  
Page 12 of 20

Table A-8. Recoveries used in MDA assessments.

Analyte	Period	Recovery	
		Median	5th percentile
Plutonium	1952–1962	0.57	0.25
Plutonium	1963–1971	0.67	0.28
Enriched uranium	1952–1971	0.60	0.21
Depleted uranium	1964–1971	0.60	0.21
Americium	1963–1965	0.67	0.29
Americium	1965–1971	0.80	0.26
Gross alpha	1952–1971	0.57	0.24

The recovery values are based on incomplete data sets and involve extrapolations to cover the total period. For plutonium from 1952 to 1962, the values are based on data for 1961 and 1962. For plutonium from 1963 to 1971, the values are based on data for 1963 to 1965 and 1969 to 1971. For EU and DU, recoveries were not calculated for the spiked samples. The median value is based on the value used for most of the period. The 5th-percentile value is based on the relative standard deviation (0.40) of the average count rate of the spiked samples from 1963 to 1966. For americium from 1963 to 1965, the values are based on a complete set for that period, ending November 1, 1965. For 1965 to 1971, the values are based on data from November 1, 1965, to 1966, and 1968 to 1970. For gross alpha, the values are based on data from 1962 to 1969 for the TBP method. In general, values for all the processes are remarkably similar, except for americium from 1965 to 1971 [110].

The volume adjustment factor ( $V/A$ ) is incorporated into the calibration factor  $K$  as the reciprocal  $1/(V/A)$ , so it becomes a multiplier with the efficiency and recovery. For convenience, the reciprocal of the volume adjustment factor is designated  $V_f$ .

For plutonium, americium, and gross alpha, the median condition is  $V = A$  and  $V_f = 1$ . The extreme condition is a low sample volume normalized to 1,200 mL:  $V = 1,200$  mL,  $A = 700$  mL (the 5th-percentile volume), and  $V_f = 0.58$  [111a].

For EU and DU (for the electrodeposition process),  $A = 50$  mL, the median  $V = 1,350$  mL, and  $V_f = 0.037$ . The extreme condition is a high sample volume:  $V = 1,750$  mL (the 95th-percentile volume),  $A = 50$  mL, and  $V_f = 0.029$  [111b].

The absorption of the alpha particles in the residue evaporated on the planchets or electrodeposited on the plates should be incorporated into the value of the calibration factor. The factor to incorporate this effect is the fraction of the alphas emitted by the deposited analyte that successfully escape from the residue. Let this factor be designated  $F_a$ , where  $F_a = (1 - \text{fraction of alphas absorbed in the residue})$ , and let the fraction of alphas absorbed in the residue be  $f_{\text{abs}}$ . Table A-9 lists the values of  $f_{\text{abs}}$ , based on judgments of experienced bioassay chemists, for the extreme (95th-percentile) condition, and the corresponding values of  $F_a$ .

**ATTACHMENT A**  
**MINIMUM DETECTABLE ACTIVITY FOR URINALYSIS METHODS AT ROCKY FLATS**  
Page 13 of 20

Table A-9. Fraction of alphas absorbed in residue.

Analyte	Period	95th percentile	
		$f_{abs}$	$F_a$
Plutonium (evaporated)	1952–1962	0.4	0.6
Plutonium (evaporated)	1963–1971	0.3	0.7
Plutonium (electrodeposited)	1963–1971	0.05	0.95
Enriched uranium (electrodeposited)	1952–1971	0.05	0.95
Depleted uranium (electrodeposited)	1964–1971	0.05	0.95
Americium (evaporated)	1964–1971	0.3	0.7
Americium (electrodeposited)	1964–1971	0.05	0.95
Gross alpha (evaporated)	1952–1962	0.1	0.9
Gross alpha (evaporated)	1962–1971	0.3	0.7

From 1963 to 1971, approximately half of the plutonium and americium samples were electrodeposited. However, the identities of samples that were electrodeposited are not discernable from the databases and reports of urinalysis results that are readily accessible [112]. For the purpose of the MDA assessment, use the value of  $F_a$  for the evaporation process.

For the median condition, the value of  $F_a$  is taken to be 1 (under the assumption that the absorption of alphas for the median condition of the planchet or plate was incorporated in the recovery value used at the time).

The calibration factor  $K$  is the product of  $\epsilon$ ,  $R$ ,  $V_f$ , and  $F_a$ :

$$K = \epsilon R V_f F_a \quad (\text{A-10})$$

The values of  $\Delta_B$  and  $\Delta_K$  are considered to be zero [113].

#### Data for Fluorimetric Mass Measurements

Applying the MDA equation (A-1) to fluorimetric mass measurements involves setting the value of  $T$  to unity and eliminating the term “3”.

The value of  $s_{B0}$  is the standard deviation of the blank flux readings that are subtracted for the signal of the aliquant reading. The value of  $s_{B1}$  is set equal to  $s_{B0}$ , and  $s_0$  is equal to the value of  $s_{B0}$  multiplied by the square root of 2:

$$s_0 = s_{B0} \sqrt{2} \quad (\text{A-11})$$

The value of  $s_{B0}$  was determined from a review by Roger Falk of the urine data logs for 1955 and 1960 to 1962. One discontinuity was noted on September 14, 1955. The value of  $s_{B0}$  before the discontinuity was 0.37 and, after the discontinuity, averaged 0.15.

The calibration factor  $K$  converts the fluorimeter net reading to the unit of  $\mu\text{g U}/24\text{-hr sample}$  (see Equation A-4). In 1955, the calibration factor was applied to the uncorrected net reading. In 1960 and later, the calibration factor was applied to the corrected reading, which was the net reading multiplied by the factor 1.15 [114]. The factor of 1.15 is incorporated into the value of  $K$  starting in 1960. For the 1950s, the calibration factor for 1955 is used, as listed in Table A-10.

**ATTACHMENT A**  
**MINIMUM DETECTABLE ACTIVITY FOR URINALYSIS METHODS AT ROCKY FLATS**

Page 14 of 20

Table A-10. Gross alpha calibration factor

Period	K
1952–1959	75/V
1960–1964	87/V

For the median condition, the volume V is equal to 1,350 mL. For the extreme condition, the 95th-percentile volume of 1,750 mL is used.

The values of  $\Delta_B$  and  $\Delta_K$  are considered to be zero.

### A.5 MDA VALUES

The value of the MDA is presented to two significant figures for information purposes. In most cases, the value of the MDA should be considered only to one significant figure.

#### Plutonium

The MDA for plutonium is assessed for the median condition and for the extreme (5th- or 95th-percentile) condition for the blank, the recovery, the volume factor  $V_f$ , and the alpha transmission factor  $F_a$ , individually and in combination. A count time of 150 min is used for all assessments.

Table A-11 lists the values of the variables and the median MDA (dpm/24-hr sample).

Table A-11. Values of variables and MDA for plutonium for median conditions.

Period	Values of the variables					MDA (dpm per 24-hr sample)
	$s_o$	$\epsilon$	R	$V_f$	$F_a$	
1952–1953	5.74	0.45	0.57	1.0	1.0	0.57
1954–1962	5.74	0.50	0.57	1.0	1.0	0.51
1963	5.74	0.50	0.67	1.0	1.0	0.44
1964–1971	5.74	0.40	0.67	1.0	1.0	0.54

Table A-12 lists the values of the variables for the extreme (5th- or 95th-percentile) conditions and the resulting MDA (dpm/24-hr sample) for all of the extreme conditions occurring for the same sample.

Table A-12. Values of variables and MDA for plutonium for extreme conditions.

Period	Values of the variables					MDA (dpm per 24-hr sample)
	$s_o$	$\epsilon$	R	$V_f$	$F_a$	
1952–1953	7.98	0.45	0.25	0.58	0.6	5.0
1954–1962	7.98	0.50	0.25	0.58	0.6	4.5
1963	7.98	0.50	0.28	0.58	0.7	3.4
1964–1971	7.98	0.40	0.28	0.58	0.7	4.3

The value of  $s_o$  incorporates the 95th-percentile value of the blank.

## ATTACHMENT A MINIMUM DETECTABLE ACTIVITY FOR URINALYSIS METHODS AT ROCKY FLATS

Page 15 of 20

It is unlikely that the four extreme conditions (high blank, low recovery, low volume, and cruddy residue on the planchet) all occurred for the same sample. Table A-13 lists the MDA for each of the extreme conditions individually, as well as for combinations of two and three extreme conditions.

Table A-13. MDA for plutonium for one, two, or three extreme conditions.

MDA (dpm/24-hr sample) for one extreme condition				
Period	$s_o$	R	$V_f$	$F_a$
1952–1953	0.76	1.3	0.98	0.95
1954–1962	0.68	1.2	0.88	0.85
1963	0.58	1.0	0.75	0.62
1964–1971	0.73	1.3	0.94	0.78

MDA (dpm/24-hr sample) for two extreme conditions						
Period	$s_o, R$	$s_o, V_f$	$s_o, F_a$	$R, V_f$	$R, F_a$	$V_f, F_a$
1952–1953	1.7	1.3	1.3	2.2	2.2	1.6
1954–1962	1.6	1.2	1.1	2.0	2.0	1.5
1963	1.4	1.0	0.97	1.8	1.5	1.1
1964–1971	1.7	1.3	1.2	2.3	1.9	1.3

MDA (dpm/24-hr sample) for three extreme conditions				
Period	$s_o, R, V_f$	$s_o, R, F_a$	$s_o, V_f, F_a$	$R, V_f, F_a$
1952–1953	3.0	2.9	2.2	3.7
1954–1962	2.7	2.6	2.0	3.4
1963	2.4	2.0	1.4	2.6
1964–1971	3.0	2.5	1.8	3.2

### Enriched Uranium

The MDA for EU is assessed for the median condition and for the extreme (5th- or 95th-percentile) condition for the blank, the recovery, the volume factor  $V_f$ , and the alpha transmission factor  $F_a$ , individually and in combination. A count time of 150 min is used for MDA assessments from 1952 to 1963. For 1964 to 1969, the count time of 30 min is used and, for 1970 to 1971, the count time of 40 min is used. For 1952 to 1959, the value of  $s_o$  is calculated for one aliquant and, for 1960 to 1971, the value of  $s_o$  is calculated based on the average of two aliquants.

Table A-14 lists the values of the variables and the median MDA (dpm/24-hr sample).

Table A-14. Values of variables and MDA for EU for median conditions

Period	Values of the variables					MDA (dpm per 24-hr sample)
	$s_o$	$\epsilon$	R	$V_f$	$F_a$	
1952–1953	5.45	0.45	0.60	0.037	1.0	14
1954–1959	5.45	0.50	0.60	0.037	1.0	13
1960–1963	3.85	0.50	0.60	0.037	1.0	9.4
1964–1969	1.57	0.40	0.60	0.037	1.0	31
1970–1971	1.83	0.40	0.60	0.037	1.0	25

**ATTACHMENT A**  
**MINIMUM DETECTABLE ACTIVITY FOR URINALYSIS METHODS AT ROCKY FLATS**  
Page 16 of 20

Table A-15 lists the values of the variables for the extreme (5th- or 95th-percentile) conditions and the resulting MDA (dpm/24-hr sample) for all of the extreme conditions occurring for the same sample.

Table A-15. Values of variables and MDA for EU for extreme conditions

Period	Values of the variables					MDA (dpm per 24-hr sample)
	$s_o$	$\epsilon$	R	$V_f$	$F_a$	
1952–1953	6.72	0.45	0.21	0.029	0.95	64
1954–1959	6.72	0.50	0.21	0.029	0.95	58
1960–1963	4.75	0.50	0.21	0.029	0.95	43
1964–1969	2.18	0.40	0.21	0.029	0.95	150
1970–1971	2.48	0.40	0.21	0.029	0.95	120

The value of  $s_o$  incorporates the 95th-percentile value of the blank.

It is unlikely that the four extreme conditions (high blank, low recovery, low volume, and cruddy residue on the planchet) all occurred for the same sample. Table A-16 lists the MDA for each of the extreme conditions individually, as well as for combinations of two and three extreme conditions.

Table A-16. MDA for EU for one, two, or three extreme conditions

MDA (dpm/24-hr sample) for one extreme condition				
Period	$s_o$	R	$V_f$	$F_a$
1952–1953	17	40	18	15
1954–1959	15	36	16	13
1960–1963	11	27	12	9.9
1964–1969	38	88	39	32
1970–1971	31	74	32	27

MDA (dpm/24-hr sample) for two extreme conditions						
Period	$s_o, R$	$s_o, V_f$	$s_o, F_a$	$R, V_f$	$R, F_a$	$V_f, F_a$
1952–1953	48	21	18	51	42	19
1954–1959	43	19	16	46	38	17
1960–1963	32	14	12	34	28	13
1964–1969	110	49	40	110	92	41
1970–1971	90	40	33	93	76	34

MDA (dpm/24-hr sample) for three extreme conditions				
Period	$s_o, R, V_f$	$s_o, R, F_a$	$s_o, V_f, F_a$	$R, V_f, F_a$
1952–1953	61	50	23	54
1954–1959	55	45	20	48
1960–1963	41	34	15	43
1964–1969	140	120	51	150
1970–1971	120	94	42	120

**ATTACHMENT A**  
**MINIMUM DETECTABLE ACTIVITY FOR URINALYSIS METHODS AT ROCKY FLATS**  
Page 17 of 20

**Depleted Uranium**

The MDA for DU is assessed for two processes: fluorimetric mass measurements from 1952 to April 30, 1964 and electrodeposition/alpha counting measurements from May 1, 1964, to 1971.

For the fluorimetric mass measurements, the MDA is assessed for one aliquant because the decision for detection was based on one aliquant, even though quantification was based on the average of two aliquants [115]. In Table A-17, the MDA at the extreme condition is based on the 95th-percentile volume.

Table A-17. Values of variables and MDA for fluorimetric measurements of DU for median and extreme conditions.

Period	Values of the variables			MDA ( $\mu\text{g}/24\text{-hr sample}$ )	
	$s_{B0}$	Median K	Extreme K	Median	Extreme
1952–1955	0.37	0.056	0.043	31	40
1955–1959	0.15	0.056	0.043	12	16
1960–1964	0.15	0.064	0.050	11	14

For the electrodeposition and alpha counting measurements, the MDA values tabulated for EU for 1964 to 1971 apply also to DU.

**Americium**

The MDA for americium is assessed for the median condition and for the extreme (5th- or 95th-percentile) condition for the blank, the recovery, the volume factor  $V_f$ , and the alpha transmission factor  $F_a$ , individually and in combination. A count time of 150 min is used for assessments from 1963 to 1970. In 1971, the typical (and minimum) count time is 60 min.

Table A-18 lists the MDA to two significant figures.

Table A-18. Values of variables and MDA for americium for median conditions.

Period	Values of the variables					MDA (dpm per 24-hr sample)
	$s_o$	$\epsilon$	R	$V_f$	$F_a$	
1963	5.82	0.50	0.67	1.0	1.0	0.44
1964–1965	5.82	0.40	0.67	1.0	1.0	0.55
1965–1970	5.82	0.40	0.80	1.0	1.0	0.46
1971	3.51	0.40	0.80	1.0	1.0	0.76

Table A-19 lists the values of the variables for the extreme (5th- or 95th-percentile) conditions and the resulting MDA (dpm/24-hr sample) for all of the extreme conditions occurring for the same sample.

**ATTACHMENT A**  
**MINIMUM DETECTABLE ACTIVITY FOR URINALYSIS METHODS AT ROCKY FLATS**  
Page 18 of 20

Table A-19. Values of variables and MDA for americium for extreme conditions

Period	Values of the variables					MDA (dpm per 24-hr sample)
	$s_o$	$\epsilon$	R	$V_f$	$F_a$	
1963	9.95	0.50	0.26	0.58	0.7	4.3
1964–1965	9.95	0.40	0.26	0.58	0.7	5.4
1965–1970	9.95	0.40	0.26	0.58	0.7	5.4
1971	5.94	0.40	0.26	0.58	0.7	8.9

The value of  $s_o$  incorporates the 95th-percentile value of the blank.

It is unlikely that the four extreme conditions (high blank, low recovery, low volume, and cruddy residue on the planchet) all occurred for the same sample. Table A-20 lists the MDA for each of the extreme conditions individually, as well as for combinations of two and three extreme conditions.

Table A-20. Values of the MDA for americium for one, two, or three extreme conditions.

MDA (dpm/24-hr sample) for one extreme condition				
Period	$s_o$	R	$V_f$	$F_a$
1963	0.68	1.1	0.76	0.63
1964–1965	0.86	1.4	0.95	0.79
1965–1970	0.72	1.4	0.80	0.66
1971	1.2	2.3	1.3	1.1

MDA (dpm/24-hr sample) for two extreme conditions						
Period	$s_o, R$	$s_o, V_f$	$s_o, F_a$	R, $V_f$	R, $F_a$	$V_f, F_a$
1963	1.8	1.2	0.98	2.0	1.6	1.1
1964–1965	2.2	1.5	1.2	2.4	2.0	1.4
1965–1970	2.2	1.2	1.0	2.4	2.0	1.1
1971	3.6	2.0	1.7	4.0	3.3	1.9

MDA (dpm/24-hr sample) for three extreme conditions				
Period	$s_o, R, V_f$	$s_o, R, F_a$	$s_o, V_f, F_a$	R, $V_f, F_a$
1963	3.0	2.5	1.7	2.8
1964–1965	3.8	3.2	2.1	3.5
1965–1970	3.8	3.2	1.8	3.5
1971	6.2	5.2	2.9	5.7

### Gross Alpha

The MDA for gross alpha measurements is assessed for the median condition and for the extreme (5th- or 95th-percentile) condition for the blank, the recovery, the volume factor  $V_f$ , and the alpha transmission factor  $F_a$ , individually and in combination. A count time of 55 min is used for 1952, 75 min for 1953 to 1959, and 150 min for 1960 to 1971 for assessments of the MDA for both the median and extreme conditions, except for 1971, when a count time of 40 min is also used for the extreme condition. See Table A-21.

**ATTACHMENT A**  
**MINIMUM DETECTABLE ACTIVITY FOR URINALYSIS METHODS AT ROCKY FLATS**  
Page 19 of 20

Table A-21. Values of variables and MDA for gross alpha measurements for median conditions.

Period	Values of the variables					MDA (dpm per 24-hr sample)
	$s_o$	$\epsilon$	R	$V_f$	$F_a$	
1952	3.26	0.45	0.57	1.0	1.0	1.0
1953	4.23	0.45	0.57	1.0	1.0	0.88
1954–1959	4.23	0.50	0.57	1.0	1.0	0.79
1960–1963	6.23	0.50	0.57	1.0	1.0	0.55
1964–1971	6.23	0.40	0.57	1.0	1.0	0.69

Table A-22 lists the values of the variables for the extreme (5th- or 95th-percentile) conditions and the resulting MDA (dpm/24-hr sample) for all of the extreme conditions occurring for the same sample.

Table A-22. Values of variables and MDA for gross alpha measurements for extreme conditions

Period	Values of the variables					MDA (dpm per 24-hr sample)
	$s_o$	$\epsilon$	R	$V_f$	$F_a$	
1952	6.09	0.45	0.24	0.58	0.9	7.4
1953	7.12	0.45	0.24	0.58	0.9	6.2
1954–1959	7.12	0.50	0.24	0.58	0.9	5.6
1960–1962	10.27	0.50	0.24	0.58	0.9	3.9
1963	10.27	0.50	0.24	0.58	0.7	5.0
1964–1971	10.27	0.40	0.24	0.58	0.7	6.3
1971 (T = 40 min)	5.18	0.40	0.24	0.58	0.7	13

The value of  $s_o$  incorporates the 95th-percentile value of the blank.

It is unlikely that the four extreme conditions (high blank, low recovery, low volume, and cruddy residue on the planchet) all occurred for the same sample. Table A-23 lists the MDA for each of the extreme conditions individually, as well as for combinations of two and three extreme conditions.

Table A-23. Values of the MDA for gross alpha measurements for one, two, or three extreme conditions.

MDA (dpm/24-hr sample) for one extreme condition					
Period	$s_o$	R	$V_f$	$F_a$	
1952	1.6	2.5	1.8	1.2	
1953	1.4	2.1	1.5	0.98	
1954–1959	1.2	1.9	1.4	0.88	
1960–1962	0.86	1.3	0.95	0.61	
1963	0.86	1.3	0.95	0.79	
1964–1971	1.1	1.6	1.2	0.98	
1971 (T = 40 min)	2.2	3.4	2.4	2.0	

MDA (dpm/24-hr sample) for two extreme conditions						
Period	$s_o, R$	$s_o, V_f$	$s_o, F_a$	R, $V_f$	R, $F_a$	$V_f, F_a$
1952	3.9	2.8	1.8	4.3	2.8	2.0
1953	3.3	2.4	1.5	3.6	2.3	1.7

1954–1959	2.9	2.1	1.4	3.2	2.1	1.5
1960–1962	2.0	1.5	0.96	2.3	1.5	1.1
1963	2.0	1.5	1.2	2.3	1.9	1.4
1964–1971	2.6	1.9	1.5	2.8	2.3	1.7
1971 (T = 40 min)	5.2	3.8	3.1	5.8	4.8	3.5

## ATTACHMENT A MINIMUM DETECTABLE ACTIVITY FOR URINALYSIS METHODS AT ROCKY FLATS

Page 20 of 20

MDA (dpm/24-hr sample) for three extreme conditions				
Period	$s_o, R, V_f$	$s_o, R, F_a$	$s_o, V_f, F_a$	$R, V_f, F_a$
1952	6.7	4.3	3.1	4.7
1953	5.6	3.6	2.6	4.0
1954–1959	5.1	3.3	2.4	3.6
1960–1962	3.5	2.3	1.6	2.5
1963	3.5	2.9	2.1	3.1
1964–1971	4.4	3.6	2.6	4.0
1971 (T = 40 min)	9.0	7.5	5.4	8.3

### A.6 DISCUSSION

The MDA is an *a priori* concept that can be applied *a posteriori* to a sample under certain circumstances: That the parameter values for the sample (e.g., volume, recovery, detector efficiency, count time) are or can be known before the processing of the sample result, and that the information is used conceptually to determine the subpopulation of conditions of which that sample is a member. Then the *a priori* MDA value for that subpopulation can be assigned to that sample. The sample volume, the characteristics of the detector that is used to count the sample, and the count time are all known before the analysis of the sample measurement. In theory, but generally not in practice, the recovery could also be known before the analysis of the sample measurement.

The MDA values in this attachment represent overall process MDAs for the median and extreme conditions. However, sufficient information is presented to allow the determination of the MDA for a specific sample if the sample-specific parameter values are known. The sample-specific parameter values, except recovery, are generally recorded in the urine data logs, but not all of the urine data logs have been found and some might not have been archived.

The recoveries for 1952 to 1971 were determined by batch spikes. Not until 1973 were some plutonium samples spiked with an internal tracer (first  $^{236}\text{Pu}$  and later  $^{242}\text{Pu}$ ). All plutonium samples were spiked with an internal tracer after 1978. Experience has shown that a significant variability of recovery can exist within a batch of samples. Therefore, the recovery of a batch spike does not necessarily indicate the recovery of each sample in the batch.

Whether to use the median or extreme value of the MDA or the extreme value depends on the purpose. By definition, the median value implies that half of the samples will have a sample-specific MDA that is lower, and half higher. If the purpose is to define a sample-specific conservative bound, the MDA for the extreme condition should be considered. In general, the recovery fraction was the variable that had the most influence on the sample-specific MDA.

### A.7 ACKNOWLEDGMENTS

The author would like to acknowledge the invaluable insights into the historical bioassay methods and procedures at RFP provided by Dale L. Bokowski, the lead bioassay chemist at RFP from 1961 to 1992. The author also acknowledges the valuable assistance of Michael Prochownik, Nancy Chandler, and Kimberly Linnemeyer, manager and staff of the Radiological Records group at RFP, for their assistance in finding and retrieving archived urinalysis data logs so this analysis could be achieved.

**ATTACHMENT B**  
**MINIMUM DETECTABLE ACTIVITY FOR *IN VIVO* LUNG COUNTS AT ROCKY FLATS**

Page 1 of 18

**Roger B. Falk**  
**Senior Life Scientist**  
**Oak Ridge Associated Universities**

**Originally submitted as draft on January 9, 2003**

**TABLE OF CONTENTS**

B.1	Introduction .....	75
B.2	MDA Methodology .....	75
B.3	History of Counting Systems and Procedures.....	76
B.4	Assessment of MDA .....	79
B.5	Values of the Variables, 1969 – for NaI(Tl) and Phoswich Detector Systems .....	81
B.6	Values of the Variables, 1976 – for Ortec Germanium Detector Systems .....	82
B.7	Values of the Variables, 1978 – for PGT I Germanium Detector Systems .....	84
B.8	Values of the Variables, 1979 – for PGT II Germanium Detector Systems .....	85
B.9	Values of the Variables, 1985 – for PGT Organ Pipe Germanium Detector Systems.....	86
B.10	Values of the Variables, 1985 – for EG&G Organ Pipe Germanium Detector Systems.....	87
B.11	MDA for RFP Plutonium .....	88

## ATTACHMENT B MINIMUM DETECTABLE ACTIVITY FOR *IN VIVO* LUNG COUNTS AT ROCKY FLATS

Page 2 of 18

### B.1 INTRODUCTION [117]

*In vivo* lung counts have been performed at RFP since 1964 to determine the activity of plutonium in the lungs of workers who were exposed, or had the potential to be exposed, to airborne plutonium. The method of *in vivo* lung counts was to place one or more detectors over the chest of the subject and count the photons emitted from the plutonium mixture, if any, in the subject's chest (Boss and Mann 1967). Plutonium was not detected directly because of the low abundance of gamma photons and because of the severe attenuation of the more abundant, low-energy L X-rays. Instead, the 59.5-keV gamma photon from <sup>241</sup>Am was used as a surrogate. The isotope <sup>241</sup>Am was present to some extent in all WG plutonium at RFP. The activity of plutonium was then calculated from the detected <sup>241</sup>Am by measuring, calculating, or assuming the fraction of the <sup>241</sup>Am in the plutonium mixture on the date of the lung count. At RFP, the fraction of the <sup>241</sup>Am in the plutonium mixture has historically been characterized in terms of parts per million by weight. Direct *in vivo* measurement of plutonium in the lungs, although investigated, was never implemented at RFP. The RFP lung counter detected <sup>241</sup>Am. The assessment of the MDA, therefore, is focused on the MDA for <sup>241</sup>Am. The MDA for plutonium can then be derived from the <sup>241</sup>Am MDA based on the value of the ppm <sup>241</sup>Am for the plutonium mixture.

### B.2 MDA METHODOLOGY

The general equation for the MDA is Equation 6 in the American National Standard, *Performance Criteria for Radiobioassay* (HPS 1996):

$$\text{MDA} = (1 + \Delta_K) (2\Delta_B B + 2ks_0 + 3) \div KT \quad (\text{B-1})$$

where:

- B = the total count of the appropriate blank
- s<sub>0</sub> = the standard deviation in the net sample count of a subject with no additional analyte

$$s_0 = \sqrt{[s_{B1}]^2 + (1/m^2) s_{B0}^2} \quad (\text{B-2})$$

where:

- s<sub>B1</sub> = the standard deviation of the subject, where the subject contains no actual analyte above that of the appropriate blank
- s<sub>B0</sub> = the standard deviation in the unadjusted count of the appropriate blank
- m = the adjustment factor for the appropriate blank

- K = calibration factor
- Δ<sub>K</sub> = the maximum fractional systematic error bound in the calibration factor K
- Δ<sub>B</sub> = the maximum expected fractional systematic error bound in the appropriate blank
- k = the abscissa of the standardized normal distribution corresponding to the 0.05 probability level (for α = 0.05 and β = 0.05, k = 1.645)
- T = the standard subject counting time for the procedure

Applying this equation to *in vivo* lung counting at RFP involves determining the value of each of these variables for the counting systems and procedures used at RFP as the systems and procedures

## ATTACHMENT B MINIMUM DETECTABLE ACTIVITY FOR *IN VIVO* LUNG COUNTS AT ROCKY FLATS

Page 3 of 18

evolved. The MDA for *in vivo* measurements is necessarily individual-specific because the detectability of  $^{241}\text{Am}$  in the chest is a significant function of the CWT of the subject.

The MDA can also be determined empirically from replicate measurements on an appropriate blank. This approach is used for the systems starting in 1995 at RFP.

### B.3 HISTORY OF COUNTING SYSTEMS AND PROCEDURES

The *in vivo* lung counting systems at RFP consisted of photon detectors mounted in a shielded room (6-in.-thick low-background steel lined with layers of lead, tin, and zinc) with electronic equipment (amplifiers and multichannel analyzers) to process and record the data.

There were three counting rooms:

- Room A, built in 1964, operational in 1965
- Room B, built in 1968, operational in 1969
- Room C, built in 1975, operational in 1976 [118]

Each room was equipped with a detector system. When a new detector system was implemented, the previous system was usually maintained as a backup system. As a result, end dates for use of a given detector system are not known. In the era of the germanium detector systems, two or more detector systems could have been operational simultaneously. In that type of situation, the detector system is identified in the record for each lung count.

#### **1964 to 1968 [119]**

There was one counting room. The detector system consisted of two NaI(Tl) scintillation detectors (there was a third detector used for cesium and potassium measurements); each detector was round with a diameter of 4 in. and was 4 mm thick with a surface area of 80 cm<sup>2</sup>. These detectors were known as the *4x4 detectors*. In most situations, the detectors were configured with one detector above the left portion of the upper chest; the second detector was over the liver and gut region. The chest detector was sometimes placed over the right portion of the upper chest rather than the left position. In other cases, both detectors were placed over the chest. The chest detectors were placed in a framework called a jig to allow a standard and reproducible position for all subjects. Count time was either 40 MLT or 20 MLT. Two backgrounds were used: (1) room background and (2) matched subject background. The room background was the count rate in the empty counting room measured at the start of the day. The matched subject background was the count rate of an unexposed subject with matched  $^{137}\text{Cs}$  and  $^{40}\text{K}$  count rates. Calibration was based on  $^{241}\text{Am}$ -impregnated epoxy lungs in the chest cavity of a water-filled REMAB™ phantom, manufactured by Alderson Research Laboratories, Inc. No adjustment was made for CWT.

#### **1969 to 1976 [120]**

During this period, two counting rooms were operational with three 4- by 4-in. NaI(Tl) scintillation detectors, two over the upper chest (right and left portions) and one over the liver/gut region (the liver/gut detector was eliminated in 1974).

**ATTACHMENT B**  
**MINIMUM DETECTABLE ACTIVITY FOR *IN VIVO* LUNG COUNTS AT ROCKY FLATS**  
Page 4 of 18

Changes:

1. The ROI of the 59.5-keV photopeak of  $^{241}\text{Am}$  was expanded.
2. The use of the jig for positioning the detectors was discontinued. Instead, the detectors were positioned in light contact with the surface of the chest.
3. The standard count time was changed to 2,000 s (1,000 s for expedited counts).
4. The method of the matched subject background based on  $^{137}\text{Cs}$  and  $^{40}\text{K}$  was replaced by the index method.

The index method had the following features (Bistline 1968):

1. Subjects were characterized by an index  $I$  equal to the ratio of the subject's weight ( $W$ , pounds) divided by twice the subject's height ( $H$ , inches).
2. A population of at least 20 known cold (unexposed) subjects of a diversity of indices was counted to generate a data set of net count rate versus index.
3. A curve fit to the data set generated a prediction equation with the index as the variable.
4. The subject's index was used to determine the predicted net count rate for the subject.

This approach was done separately for the right chest, the left chest, and the liver/gut.

In 1973, a phoswich detector system [a detector with a primary scintillation NaI(Tl) layer backed by a CsI layer for coincidence counting] was implemented and used intermittently into the 1980s. The NaI(Tl) layer of the phoswich detectors was dimensionally the same as the 4- by 4-in. detectors.

This system lacked the stability of the NaI(Tl) detector system and was used mainly as a backup system. Use of the phoswich system to detect plutonium directly via the plutonium L X-rays was not successfully implemented at RFP.

In about 1972, room background was measured at the start of the day shift, at noon, and at the start of the night shift. The value of the room background used was the five-point moving average of the last five counts.

Starting in 1969 [121], the ppm  $^{241}\text{Am}$  was measured routinely from a representative sample of the plutonium mixture associated with incidents with the potential for inhalation exposure of workers. This situation was called a *PI* (for possible inhalation) and refers both to the incident and to the worker involved in the incident.

In this period, the use of a lithium-drifted germanium detector system was investigated but was never implemented.

**ATTACHMENT B**  
**MINIMUM DETECTABLE ACTIVITY FOR *IN VIVO* LUNG COUNTS AT ROCKY FLATS**

Page 5 of 18

**1976 to 1985 [122]**

This period is the era of the high-purity germanium detector array systems. Three counting rooms were operational. When the germanium systems were implemented, most, if not all, quantitative measures were accomplished with that system. The NaI(Tl) and phoswich systems were used only as screening systems, and later only as backup systems. The germanium systems in this period featured four detectors mounted in an array attached to a single cryostat containing liquid nitrogen. The system had two of these arrays, one positioned over the upper right chest and the other over the upper left chest. A full system consisted of eight detectors. However, occasionally one or more of the detectors failed and were electronically eliminated from the system. A minimum system was five detectors, three in the right array and two in the left array. To maintain a minimum functional system, a hybrid system consisting of two arrays of different characteristics was frequently used.

The germanium system implementation timeline was:

- 1976 Ortec detectors, 10 cm<sup>2</sup> per detector, two arrays
- 1977 PGT I detectors, 15 cm<sup>2</sup> per detector, two arrays
- 1979 First array, PGT II detectors, 18 cm<sup>2</sup> per detector
- 1980 Second array, PGT II detectors, 18 cm<sup>2</sup> per detector

Other changes in this period were:

1. The calibration factor for the germanium systems was adjusted for the CWT of the subject. The thickness (centimeters) was equal to twice the index value minus 0.1 (CWT = 2 I – 0.1).
2. Calibration was accomplished using a Masonite phantom from 1976 to 1978.
3. Calibration was accomplished using the LLNL phantom starting in 1979.
4. The method of determining the background changed for the germanium systems. Room and subject background were determined, as a unit, from the subject's own spectrum using a ROI in the range of 65 to 72 keV.

**1985 to 1995 [123]**

In this period, germanium detectors in an organ pipe configuration were implemented. Instead of clustering four detectors in an array with a common cryostat, each detector was attached to its own cryostat, which was tall and slender. The detectors with the cryostats were then clustered in arrays, two to four detectors per array, over the right and left portions of the upper chest. If a detector malfunctioned, it was physically replaced with a backup functional detector. A minimum system from 1985 to 1991 was five detectors, three detectors on the right and two on the left. The full system was seven detectors, four detectors on the right and three on the left, although the routine system generally consisted of six detectors, either four on the right and two on the left or three on each side. In 1991, the full system was six detectors with either four detectors on the right and two on the left or three detectors on each side.

The germanium system implementation timeline was:

- 1985 PGT organ pipe detectors, 20 cm<sup>2</sup> per detector

**ATTACHMENT B**  
**MINIMUM DETECTABLE ACTIVITY FOR *IN VIVO* LUNG COUNTS AT ROCKY FLATS**

Page 6 of 18

1991 EG&G Ortec organ pipe detectors, 20 cm<sup>2</sup> per detector

No other significant changes were made during this period.

**1995 to 2005 [124]**

In May 1995, the lung counter hardware, software, and detectors were upgraded. The data acquisition and analysis were accomplished using the Canberra Industries program ABACOS-Plus<sup>®</sup>. Instead of the ROI approach that was used historically, this program used a peak-search method to detect activity of a radionuclide. The value of the MDA was established by replicate measurements on an appropriate blank. The germanium detectors were replaced by EG&G Ortec organ pipe detectors with 38 cm<sup>2</sup> per detector. The standard system was four detectors, two on each side. The minimum system was three detectors, two on the right and one on the left.

Another significant change (RFETS 2000b) was the equation to determine the CWT. ABACOS-Plus<sup>®</sup> incorporates the equation developed at LLNL:

$$\text{CWT (cm)} = 1.973 (W/H) - 2.0038 \quad (\text{B-3})$$

where:

W = subject's weight (pounds), and  
H = subject's height (inches).

The effect of this change is an adjustment factor, given by the equation:

$$\text{CWT Adjustment Factor} = 0.5364 \exp(0.635 I) \quad (\text{B-4})$$

This adjustment factor is a multiplier to the activity of <sup>241</sup>Am, detected via the 59.5-keV gamma, for all previous detector systems at RFP. Equation B-4 can also be applied as a divisor to historical calibration factors for previous systems at RFP.

#### **B.4 ASSESSMENT OF MDA**

The value of the MDA for <sup>241</sup>Am is assessed here for each detector system and for each significant change in the procedure. It is assessed not only for the typical RFP male (I = 1.35, CWT = 3.3 cm) but also for a reasonable range of statures (I = 0.90, CWT = 1.5 cm and I = 1.80, CWT = 5.1 cm). The assessment is also done for the minimally configured system as well as for the standard system and for half of the normal count time (for expedited lung counts) as well as the full count time.

Discontinuities, which were significant changes in methods affecting the interpretation of the raw data (and hence the MDA), were identified by the author of this attachment via review of available records and were incorporated into the value of the calibration factor. This process was done starting with the most recent calibration method, assumed to be the most accurate. The factors associated with each discontinuity were then applied, as divisors to the calibration factor, back through the history of the systems. As an alternative, the product of the factors, for the appropriate period, can be used in place of the term  $(1 + \Delta_K)$  in Equation B-1. Table B-1 lists the discontinuity factors.

**ATTACHMENT B**  
**MINIMUM DETECTABLE ACTIVITY FOR *IN VIVO* LUNG COUNTS AT ROCKY FLATS**  
Page 7 of 18

Table B-1. Discontinuity factors.

Year	Discontinuity	Factor
1995	New CWT method	
	Index = 0.90	0.95
	Index = 1.35	1.26
	Index = 1.80	1.68
1979	Calibration using LLNL phantom	1.30
1969	Fixed positioning discontinued ROI for 59.5-keV photopeak increased	1.45

The discontinuity factors for the CWT can be calculated by any index I using:

$$\text{CWT Discontinuity Factor} = 0.5364 \exp(0.635 I) \quad (\text{B-5})$$

**Values of the Variables, 1964–1968**

The minimum system was one NaI(Tl) detector positioned over the left chest.

Count time T = 20 MLT or 40 MLT [125]

The appropriate blank, B, was the net man background (after room background was subtracted) estimated from matched unexposed subjects based on <sup>137</sup>Cs and <sup>40</sup>K measurements.

B = 600 for T = 20 MLT

B = 1,200 for T = 40 MLT

$\Delta_B = 0.2$ , estimated as the upper bound for this method

The value of  $s_o$  is calculated from counting statistics, including the total subject count, which is taken as the sum of B and the room background R.

R = 500 for T = 20 MLT

R = 1,000 for T = 40 MLT

Because the decision of detection was based on the comparison of the net subject count rate (after subtraction of room background) with the predicted net count rate of the appropriate blank, the calculation of  $s_{B1}$  includes an extra component of the room background.

$$s_{B1}^2 = \text{Total subject count} + R = B + 2R$$

$$= 1,600 \text{ for } T = 20 \text{ MLT}$$

$$= 3,200 \text{ for } T = 40 \text{ MLT}$$

$$s_{B0}^2 = B$$

$$= 600 \text{ for } T = 20 \text{ MLT}$$

$$= 1,200 \text{ for } T = 40 \text{ MLT}$$

$$m = 1$$

$$s_o = 44.9 \text{ for } T = 20 \text{ MLT}$$

$$= 66.3 \text{ for } T = 40 \text{ MLT}$$

The <sup>241</sup>Am calibration factor K for two detectors, normalized to the calibration with the LLNL phantom [126] and incorporating the discontinuity factors (Equation B-5, 1.30, and 1.45) is given by:

**ATTACHMENT B**  
**MINIMUM DETECTABLE ACTIVITY FOR *IN VIVO* LUNG COUNTS AT ROCKY FLATS**  
Page 8 of 18

$$K = 55.13 \exp(-0.2359 (2 I - 0.1)) \div \exp(0.635 I) \quad (\text{B-6})$$

The calibration factor for the system with only one detector over the left portion of the chest is given by Equation B-6 multiplied by 0.43. This factor is the fraction of the total activity in the calibration lungs of the RFP LLNL phantom that is in the left portion of the lung. The MDA, therefore, pertains to the activity in the total lung based on the detection of activity only in the left portion of the lung.

$$K = 8.96 \text{ for } I = 0.90$$

$$K = 5.45 \text{ for } I = 1.35$$

$$K = 3.31 \text{ for } I = 1.80$$

Because K is normalized to the calibration with the LLNL phantom and the discontinuity factors are incorporated into K, the value of  $\Delta_K$  is taken to be zero. Because the term  $(1 + \Delta_K)$  in Equation B-1 is a multiplier to the MDA and because the value of  $\Delta_K$  is estimated based on the professional judgment of the analyst, one can easily adjust the values of the MDA in this attachment if another analyst has a different judgment.

For the standard system of two detectors, over both the right and left portions of the lungs, the counts are basically doubled and the values of the variables are:

$$B = 1,200 \text{ for } T = 20 \text{ MLT}$$

$$B = 2,400 \text{ for } T = 40 \text{ MLT}$$

$$\Delta_B = 0.2, \text{ estimated as the upper bound for this method}$$

$$R = 1,000 \text{ for } T = 20 \text{ MLT}$$

$$R = 2,000 \text{ for } T = 40 \text{ MLT}$$

$$s_{B1}^2 = \text{Total subject count} + R = B + 2R$$

$$= 3,200 \text{ for } T = 20 \text{ MLT}$$

$$= 6,400 \text{ for } T = 40 \text{ MLT}$$

$$s_{B0}^2 = B$$

$$= 1,200 \text{ for } T = 20 \text{ MLT}$$

$$= 2,400 \text{ for } T = 40 \text{ MLT}$$

$$m = 1$$

$$s_o = 69.3 \text{ for } T = 20 \text{ MLT}$$

$$= 93.8 \text{ for } T = 40 \text{ MLT}$$

$$K = 20.85 \text{ for } I = 0.90$$

$$= 12.67 \text{ for } I = 1.35$$

$$= 7.70 \text{ for } I = 1.80$$

#### **B.5 VALUES OF THE VARIABLES, 1969 – FOR NAI(TL) AND PHOSWICH DETECTOR SYSTEMS**

The standard system was two detectors positioned over the left and right portions of the chest. This is also the minimum system.

$$\text{Count time } T = 1,000 \text{ s or } 2,000 \text{ s [127]}$$

**ATTACHMENT B**  
**MINIMUM DETECTABLE ACTIVITY FOR *IN VIVO* LUNG COUNTS AT ROCKY FLATS**  
Page 9 of 18

The appropriate blank was the net man background (after room background was subtracted) estimated from matched, unexposed subjects based on the subject's index:

$$\begin{aligned} B &= 1,100 \text{ for } T = 1,000 \text{ s} \\ B &= 2,200 \text{ for } T = 2,000 \text{ s} \\ \Delta_B &= 0 \text{ for the NaI(Tl) detector system} \\ \Delta_B &= 0.1, \text{ estimated for the phoswich detector system, because the system was less stable} \\ &\quad \text{than the NaI(Tl) detector system} \end{aligned}$$

The value of  $s_o$  is calculated from counting statistics, including the total subject count, which is taken as the sum of B and the room background R. The value of  $s_{B0}$  is taken to be 10% of the value B, based on the typical relative standard deviation of the predicted subject net count rate.

$$\begin{aligned} R &= 833 \text{ for } T = 1,000 \text{ s} \\ R &= 1,667 \text{ for } T = 2,000 \text{ s} \\ s_{B1}^2 &= \text{Total subject count} + R = B + 2R \\ &= 2,767 \text{ for } T = 1,000 \text{ s} \\ &= 5,533 \text{ for } T = 2,000 \text{ s} \\ s_{B0}^2 &= (0.1B)^2 \\ &= 12,100 \text{ for } T = 1,000 \text{ s} \\ &= 48,400 \text{ for } T = 2,000 \text{ s} \\ m &= 1 \\ s_o &= 121.9 \text{ for } T = 1,000 \text{ s} \\ &= 232.2 \text{ for } T = 2,000 \text{ s} \end{aligned}$$

The  $^{241}\text{Am}$  calibration factor K for two detectors, normalized to the calibration with the LLNL phantom and incorporating the discontinuity factors (Equation B-5 and 1.30) is given by:

$$K = 79.94 \exp(-0.2359 (2l - 0.1)) \div \exp(0.635 l) \quad (\text{B-7})$$

$$\begin{aligned} K &= 30.23 \text{ for } l = 0.90 \\ &= 18.37 \text{ for } l = 1.35 \\ &= 11.16 \text{ for } l = 1.80 \end{aligned}$$

## B.6 VALUES OF THE VARIABLES, 1976 – FOR ORTEC GERMANIUM DETECTOR SYSTEMS

The standard system was two arrays, each array with four detectors, positioned over the left and right portions of the chest. The minimum system was two arrays with a total of eight detectors.

$$\text{Count time } T = 1,000 \text{ s or } 2,000 \text{ s}$$

The appropriate blank was the count in the subject's spectrum (composite for all detectors) in the range of 65 keV to 72 keV, divided by eight. The subject, in essence, was his own blank with essentially no bias. Room background was no longer assessed separately for germanium systems.

$$\begin{aligned} \Delta_B &= 0 \\ m &= 8 \end{aligned}$$

**ATTACHMENT B**  
**MINIMUM DETECTABLE ACTIVITY FOR *IN VIVO* LUNG COUNTS AT ROCKY FLATS**  
Page 10 of 18

For eight detectors:

$$B = 341 \text{ for } T = 1,000 \text{ s (unadjusted by } m = 8)$$

$$B = 682 \text{ for } T = 2,000 \text{ s (unadjusted by } m = 8)$$

For five detectors:

$$B = 213 \text{ for } T = 1,000 \text{ s (unadjusted by } m = 8)$$

$$B = 427 \text{ for } T = 2,000 \text{ s (unadjusted by } m = 8)$$

For the calculation of  $s_{B1}$ , the subject background is  $B/8$ .

For eight detectors:

$$T = 1,000 \text{ s:}$$

$$s_{B1} = 6.53 \quad s_{B0} = 18.5 \quad s_0 = 6.93$$

$$T = 2,000 \text{ s:}$$

$$s_{B1} = 9.23 \quad s_{B0} = 26.1 \quad s_0 = 9.79$$

For five detectors:

$$T = 1,000 \text{ s:}$$

$$s_{B1} = 5.17 \quad s_{B0} = 14.6 \quad s_0 = 5.48$$

$$T = 2,000 \text{ s:}$$

$$s_{B1} = 7.30 \quad s_{B0} = 20.7 \quad s_0 = 7.75$$

The  $^{241}\text{Am}$  calibration factor  $K$  for two arrays with a total of eight detectors, based on the calibration with the LLNL phantom and incorporating the discontinuity factors [Equation B-5 and 1.30 (for pre-1979 systems)] is given by:

$$K = 24.12 \exp(-0.3398 (2 I - 0.1)) \div \exp(0.635 I) \tag{B-8}$$

and, for Ortec systems 1979 and following:

$$K = 31.36 \exp(-0.3398 (2 I - 0.1)) \div \exp(0.635 I) \tag{B-9}$$

For the minimum system of five detectors, adjust the calibration factor by multiplying by  $(5/8)$ .

Table B-2 lists the calibration factors for the Ortec germanium detector system.

Table B-2. Calibration factors for the Ortec germanium detector system.

Index	Eight-detector calibration factor (K)	
	Pre-1979	1979
0.90	7.64	9.94
1.35	4.23	5.50
1.80	2.34	3.04

**ATTACHMENT B**  
**MINIMUM DETECTABLE ACTIVITY FOR *IN VIVO* LUNG COUNTS AT ROCKY FLATS**  
Page 11 of 18

**B.7 VALUES OF THE VARIABLES, 1978 – FOR PGT I GERMANIUM DETECTOR SYSTEMS**

The PGT I germanium system is basically the same as the Ortec germanium system. The main difference is that the PGT I detectors had a larger surface area but a poorer resolution [128a].

$$\Delta_B = 0$$

$$m = 4$$

For eight detectors:

$$B = 240 \text{ for } T = 1,000 \text{ s (unadjusted by } m = 4)$$

$$B = 480 \text{ for } T = 2,000 \text{ s (unadjusted by } m = 4)$$

For five detectors:

$$B = 150 \text{ for } T = 1,000 \text{ s (unadjusted by } m = 4)$$

$$B = 300 \text{ for } T = 2,000 \text{ s (unadjusted by } m = 4)$$

For the calculation of  $s_{B1}$ , the subject background is  $B/4$ .

For eight detectors:

$$T = 1,000 \text{ s:}$$

$s_{B1} = 7.75$	$s_{B0} = 15.5$	$s_0 = 8.67$
-----------------	-----------------	--------------

$$T = 2,000 \text{ s:}$$

$s_{B1} = 10.95$	$s_{B0} = 21.9$	$s_0 = 12.2$
------------------	-----------------	--------------

For five detectors:

$$T = 1,000 \text{ s:}$$

$s_{B1} = 6.12$	$s_{B0} = 12.2$	$s_0 = 6.84$
-----------------	-----------------	--------------

$$T = 2,000 \text{ s:}$$

$s_{B1} = 8.66$	$s_{B0} = 17.3$	$s_0 = 9.68$
-----------------	-----------------	--------------

The  $^{241}\text{Am}$  calibration factor  $K$  for two arrays with a total of eight detectors, based on the calibration with the LLNL phantom and incorporating the discontinuity factors [Equation B-5 and 1.30 (for pre-1979 systems)] is given by:

$$K = 34.09 \exp(-0.3292 (2 I - 0.1)) \div \exp(0.635 I) \tag{B-10}$$

and, for PGT I systems 1979 and following:

$$K = 44.318 \exp(-0.3292 (2 I - 0.1)) \div \exp(0.635 I) \tag{B-11}$$

For the minimum system of five detectors, adjust the calibration factor by multiplying by  $(5/8)$ .

**ATTACHMENT B**  
**MINIMUM DETECTABLE ACTIVITY FOR *IN VIVO* LUNG COUNTS AT ROCKY FLATS**  
Page 12 of 18

Table B-3 lists calibration factors for the PGT I germanium detector system.

Table B-3. Calibration factors for the PGT I germanium detector system

Index	Eight-detector calibration factor (K)	
	Pre-1979	1979 →
0.90	11.00	14.30
1.35	6.15	7.99
1.80	3.43	4.46

**B.8 VALUES OF THE VARIABLES, 1979 – FOR PGT II GERMANIUM DETECTOR SYSTEMS**

The PGT II germanium system is basically the same as the Ortec and PGT I systems. The main difference is that the PGT II detectors, again, had a larger surface area but a poorer resolution [128b].

$$\Delta_B = 0$$

$$m = 4$$

For eight detectors:

$$B = 273 \text{ for } T = 1,000 \text{ s (unadjusted by } m = 4)$$

$$B = 546 \text{ for } T = 2,000 \text{ s (unadjusted by } m = 4)$$

For five detectors:

$$B = 170 \text{ for } T = 1,000 \text{ s (unadjusted by } m = 4)$$

$$B = 341 \text{ for } T = 2,000 \text{ s (unadjusted by } m = 4)$$

For the calculation of  $s_{B1}$ , the subject background is  $B/4$ .

For eight detectors:

$$T = 1,000 \text{ s:}$$

$$s_{B1} = 8.26 \quad s_{B0} = 16.5 \quad s_0 = 9.23$$

$$T = 2,000 \text{ s:}$$

$$s_{B1} = 11.7 \quad s_{B0} = 23.4 \quad s_0 = 13.1$$

For five detectors:

$$T = 1,000 \text{ s:}$$

$$s_{B1} = 6.53 \quad s_{B0} = 13.1 \quad s_0 = 7.31$$

$$T = 2,000 \text{ s:}$$

$$s_{B1} = 9.23 \quad s_{B0} = 18.5 \quad s_0 = 10.3$$

**ATTACHMENT B**  
**MINIMUM DETECTABLE ACTIVITY FOR *IN VIVO* LUNG COUNTS AT ROCKY FLATS**  
Page 13 of 18

The <sup>241</sup>Am calibration factor K for two arrays with a total of eight detectors (incorporating Equation B-5), is given by:

$$K = 38.65 \exp(-0.3579 (2 I - 0.1)) \div \exp(0.635 I) \quad (B-12)$$

For the minimum system of five detectors, adjust the calibration factor by multiplying by (5/8).

Table B-4 lists calibration factors for the PGT II germanium detector system.

Table B-4. Calibration factors for the PGT II germanium detector system.

Index	Eight-detector calibration factor (K)
0.90	11.88
1.35	6.47
1.80	3.52

**B.9 VALUES OF THE VARIABLES, 1985 – FOR PGT ORGAN PIPE GERMANIUM DETECTOR SYSTEMS**

The PGT organ pipe germanium system is basically the same as the previous germanium array systems. The main difference is the ability to maintain a stable, standard configuration with six detectors.

$$\Delta_B = 0$$

$$m = 4$$

Table B-5 lists the values of variables for the PGT organ pipe germanium detector system.

Table B-5. Values of variables for the PGT organ pipe germanium detector system

	T = 1,000 s	T = 2,000 s
B	215	429
S <sub>B1</sub>	7.33	10.4
S <sub>B0</sub>	14.7	20.7
S <sub>0</sub>	8.20	11.6

The <sup>241</sup>Am calibration factor K for two arrays with a total of six detectors (incorporating Equation B-5) is given by:

$$K = 34.32 \exp(-0.2946 (2 I - 0.1)) \div \exp(0.635 I) \quad (B-13)$$

Table B-6 lists calibration factors for the PGT organ pipe germanium detector system.

**ATTACHMENT B**  
**MINIMUM DETECTABLE ACTIVITY FOR *IN VIVO* LUNG COUNTS AT ROCKY FLATS**

Page 14 of 18

Table B-6. Calibration factors for the PGT organ pipe germanium detector system.

Index	Six-detector calibration factor (K)
0.90	11.74
1.35	6.77
1.80	3.90

**B.10 VALUES OF THE VARIABLES, 1985 – FOR EG&G ORGAN PIPE GERMANIUM DETECTOR SYSTEMS**

The EG&G organ pipe germanium system is basically the same as the previous PGT organ pipe germanium array system.

$$\Delta_B = 0$$

$$m = 4$$

Table B-7 lists the values of variables for the EG&G organ pipe germanium detector system.

Table B-7. Values of variables for the EG&G organ pipe germanium detector system.

	T = 1,000 s	T = 2,000 s
B	204	408
S <sub>B1</sub>	7.14	10.1
S <sub>B0</sub>	14.3	20.2
S <sub>0</sub>	7.98	11.3

The <sup>241</sup>Am calibration factor K for two arrays with a total of six detectors, incorporating Equation B-5, is given by:

$$K = 42.36 \exp(-0.3708 (2 l - 0.1)) \div \exp(0.635 l) \tag{B-14}$$

Table B-8 lists calibration factors for the EG&G organ pipe GE detector system.

Table B-8. Calibration factors for the EG&G organ pipe germanium detector system.

Index	Six-detector calibration factor (K)
0.90	12.73
1.35	6.85
1.80	3.69

**Values of the Variables, 1995**

The MDA for the system at RFP was not determined analytically using Equation B-1. Instead, the MDA was determined empirically from replicate measurements on an appropriate blank that simulated the counts of the average RFP worker (CWT = 3.36 cm). Therefore, there are no values of the

**ATTACHMENT B**  
**MINIMUM DETECTABLE ACTIVITY FOR *IN VIVO* LUNG COUNTS AT ROCKY FLATS**

Page 15 of 18

variables to be listed here. The value of the MDA for the average RFP worker (CWT = 3.36 cm, l = 1.35) is 0.3 nCi <sup>241</sup>Am.

To extrapolate this value to the range of workers (CWT = 1.15 cm, l = 0.90 to CWT = 5.10 cm, l = 1.80), the following approach was used to establish the calibration factor equation as a function of CWT. The efficiency equation is:

$$\epsilon = a_1 \exp(a_2 \text{ CWT}) \tag{B-15}$$

where

- $\epsilon$  = count per minute per gamma from <sup>241</sup>Am
- $a_1$  = 0.045 (factor determined from calibration)
- $a_2$  = -0.41 (factor determined from calibration)

The efficiency equation converts to the style of historical calibration equations using the conversion factors of 0.359 gamma photons (59.5 keV) per <sup>241</sup>Am nuclear transformation and 797  $\gamma$ /min per nCi <sup>241</sup>Am. The derived calibration equation is:

$$K = 35.9 \exp(-0.41 \text{ CWT}) \tag{B-16}$$

The MDA for any value of CWT is then obtained from the product of 0.3 nCi (the MDA for the average RFP worker) and the ratio (9.05/K for the value of the CWT).

**B.11 MDA FOR RFP PLUTONIUM**

The MDA for RFP plutonium is derived from the MDA of <sup>241</sup>Am based on the value of the ppm <sup>241</sup>Am in the plutonium mixture at the time of the lung count. To convert the MDA for <sup>241</sup>Am to the MDA for plutonium (<sup>239</sup>Pu and <sup>240</sup>Pu), the MDA for <sup>241</sup>Am is multiplied by the factor:

$$\text{MDA Conversion Factor} = (1 \times 10^6 - \text{ppm } ^{241}\text{Am}) \div (48.2 \text{ ppm } ^{241}\text{Am}) \tag{B-17}$$

Table B-9 lists MDA conversion factors for some typical values of ppm <sup>241</sup>Am.

Table B-9. MDA conversion factors for values of ppm <sup>241</sup>Am.

ppm Am-241	MDA conversion factors
100	207
1,000	20.7
10,000	2.05

The task is to determine the value of the ppm <sup>241</sup>Am at the time of the lung count. The practice at RFP was to measure the ppm <sup>241</sup>Am in a representative sample of material involved in a possible inhalation incident. If a representative sample was not obtained or the origin of the intake was not known, a default value of 1,000 ppm <sup>241</sup>Am was used and was assigned to the date of the intake or to the date of the first positive lung count if the date of the intake was not known. For subsequent lung counts, the value of the ppm <sup>241</sup>Am was updated to account for the ingrowth of the <sup>241</sup>Am from the

**ATTACHMENT B**  
**MINIMUM DETECTABLE ACTIVITY FOR *IN VIVO* LUNG COUNTS AT ROCKY FLATS**

Page 16 of 18

nuclear transformation of <sup>241</sup>Pu and for the radioactive decay of the <sup>241</sup>Am. The rate of ingrowth of <sup>241</sup>Am in the plutonium mixture depends on the fraction by weight of the <sup>241</sup>Pu in the mixture. The initial weight fraction of <sup>241</sup>Pu in RFP plutonium is taken to be 0.005 in the 1950s and 1960s and 0.0036 in the 1970s and later [129]. Table B-10 lists values of the ppm <sup>241</sup>Am at times (years) after the intake for initial values of ppm <sup>241</sup>Am of 100, 1,000, and 10,000. The value of 100 ppm <sup>241</sup>Am can be taken as the lower bound [130] and represents freshly purified plutonium.

Table B-10. Americium ingrowth in RFP plutonium.

Years	Am-241 ppm at time (yr) after intake					
	Initial fraction Pu-241 = 0.0036			Initial fraction Pu-241 = 0.0050		
	100	1,000	10,000	100	1,000	10,000
1	270	1,200	10,200	340	1,200	10,200
2	430	1,300	10,300	560	1,500	10,400
4	730	1,600	10,600	980	1,900	10,800
6	1,000	1,900	10,800	1,400	2,200	11,100
10	1,500	2,400	11,200	2,000	2,900	11,700
20	2,300	3,200	11,900	3,100	4,000	12,700
30	2,800	3,600	12,200	3,800	4,700	13,200
40	3,000	3,900	12,300	4,200	5,000	13,500
50	3,200	4,000	12,300	4,400	5,200	13,500

The appropriate value of the ppm <sup>241</sup>Am should be applied for lung counts that occurred following a known or assumed intake.

The equation to calculate the ppm <sup>241</sup>Am for any time (years) after the intake is:

$$A = L_1 P_0 [\exp(-\lambda_{Pu241}T) - \exp(-\lambda_{Am241}T)] + 10^6 A_0 L_2 / [A_0 L_2 + \exp(-\lambda_{Pu239}T)] \quad (B-18)$$

where

- A = ppm <sup>241</sup>Am at time T (years)
- $L_1 = \lambda_{Pu241} \div (\lambda_{Am241} - \lambda_{Pu241})$
- $\lambda_{Pu241}$  = decay constant for <sup>241</sup>Pu (half-life = 14.4 yr) = 0.0481
- $\lambda_{Am241}$  = decay constant for <sup>241</sup>Am (half-life = 433 yr) = 0.00160
- A<sub>0</sub> = initial ppm <sup>241</sup>Am
- P<sub>0</sub> = initial <sup>241</sup>Pu ppm = (Initial <sup>241</sup>Pu fraction by weight) × (10<sup>6</sup> - A<sub>0</sub>)
- $L_2 = \exp(-\lambda_{Am241}T) \div (10^6 - A_0)$
- $\lambda_{Pu239}$  = decay constant for <sup>239</sup>Pu (half-life = 24,100 years) = 0.0000288

Half-times are from *Table of Isotopes, Seventh Edition* (Lederer and Shirley 1978).

Table B-11 summarizes the americium MDAs for RFP *in vivo* lung counts.

**ATTACHMENT B**  
**MINIMUM DETECTABLE ACTIVITY FOR *IN VIVO* LUNG COUNTS AT ROCKY FLATS**

Page 17 of 18

Table B-11. Americium MDA for *in vivo* lung counts at RFP.

Period	Detector system	Index	MDA (nCi) for Am-241				Comments
			Minimum system		Standard system		
			Half time	Full time	Half time	Full time	
1964–1968	NaI(Tl) 4x4	0.90	1.7	1.5	1.3	1.2	Full time = 40 MLT. Minimum system is one detector over the left chest. Standard system is two detectors, over right and left chests.
		1.35	2.8	2.5	2.1	1.9	
		1.80	4.6	4.1	3.5	3.2	
1969–	NaI(Tl) 4x4	0.90			0.80	0.76	Full time = 2,000 s. Standard system is two detectors, over right and left chests.
		1.35			1.3	1.3	
		1.80			2.2	2.0	
1973–	Phoswich	0.90			1.2	1.2	Full time = 2,000 s. Standard system is two detectors, over right and left chests. NaI sensitive layer is the same as the NaI 4x4.
		1.35			2.0	2.0	
		1.80			3.3	3.2	
1976–1978	Ortec Arrays (High-purity Ge)	0.90	0.26	0.18	0.20	0.14	Full time = 2,000 s. Standard system is eight detectors in two arrays. Minimum system is five detectors in two arrays.
		1.35	0.48	0.32	0.37	0.25	
		1.80	0.86	0.59	0.66	0.45	
1979–	Ortec Arrays (High-purity Ge)	0.90	0.20	0.14	0.16	0.11	Same as previous germanium system.
		1.35	0.37	0.25	0.28	0.19	
		1.80	0.66	0.45	0.51	0.35	
1978–	PGT I Arrays (High-purity Ge)	0.90	0.22	0.15	0.17	0.12	Same as previous germanium systems.
		1.35	0.40	0.27	0.31	0.21	
		1.80	0.71	0.49	0.55	0.38	
1979–	PGT I Arrays (High-purity Ge)	0.90	0.17	0.12	0.13	0.09	Same as previous germanium systems.
		1.35	0.31	0.21	0.24	0.16	
		1.80	0.55	0.38	0.42	0.29	
1979–	PGT II Arrays (High-purity Ge)	0.90	0.22	0.15	0.17	0.12	Same as previous germanium systems.
		1.35	0.40	0.28	0.31	0.21	
		1.80	0.74	0.50	0.57	0.39	
1985–	PGT Organ Pipe (OP) Ge Detectors	0.90			0.15	0.11	Standard system = six detectors. Standard count time = 2,000 s. Occasionally, five or seven detectors were used.
		1.35			0.26	0.18	
		1.80			0.46	0.32	
1991–	EG&G Organ Pipe Ge Detectors	0.90			0.14	0.10	Standard system = six detectors. Standard count time = 2,000 s.
		1.35			0.26	0.18	
		1.80			0.48	0.33	
1995–	Ortec 2 Organ Pipe Ge Detectors	0.90				0.14	Standard system = four detectors. Standard count time = 2,000 s.
		1.35				0.3	
		1.80				0.6	

Note: Starting in 1978, hybrid germanium systems were used that combined two different germanium arrays or detector types. For hybrid systems, use the higher of the MDA values for the detector types involved.

**ATTACHMENT B**  
**MINIMUM DETECTABLE ACTIVITY FOR *IN VIVO* LUNG COUNTS AT ROCKY FLATS**  
Page 18 of 18

The index is the ratio of the weight (pounds) of the subject divided by twice the height (inches) and is correlated with the CWT. The index of 1.35 represents the typical RFP male subject, with a reasonable range of 0.90 (CWT = 1.5 cm) to 1.80 (CWT = 5.1 cm).

To convert the MDA for <sup>241</sup>Am to the MDA for <sup>239,240</sup>Pu, multiply the MDA for <sup>241</sup>Am by  $[(1 \times 10^6 - \text{ppm } ^{241}\text{Am}) \div (48.2 \times \text{ppm } ^{241}\text{Am})]$ , where ppm <sup>241</sup>Am is the parts per million by weight of the <sup>241</sup>Am in the plutonium mixture at the time of the lung count.

Americium-241 grows into the plutonium mixture from the nuclear transformation of <sup>241</sup>Pu. The initial weight fraction of <sup>241</sup>Pu in RFP plutonium is 0.0050 in the 1950s and 1960s and 0.0036 in the 1970s and 1980s. For freshly purified plutonium, with a residual of approximately 100 ppm <sup>241</sup>Am, the ppm <sup>241</sup>Am would be 270 to 340 after the 1st year, 430 to 560 after the 2nd year, 730 to 980 after the 4th year, 1,000 to 1,400 after the 6th year, 1,500 to 2,000 after the 10th year, 2,300 to 3,100 after the 20th year, 2,800 to 3,800 after the 30th year, 3,000 to 4,200 after the 40th year, and 3,200 to 4,400 after the 50th year.

Halved count times were usually used for nonscheduled counts or when a large number of subjects needed to be counted expeditiously.

**ATTACHMENT C  
EXAMPLES OF BIOASSAY DATA RECORDS AND REPORTS**

Page 1 of 32

**LIST OF FIGURES**

<b><u>FIGURE</u></b>	<b><u>TITLE</u></b>	<b><u>PAGE</u></b>
C-1	Urinalysis Record Card and Health Sciences Data System – Urinalysis Detail (1) (first activity date on the HSDS portion: 10-29-54) .....	93
C-2	Urinalysis Record Card and Health Sciences Data System – Urinalysis Detail (2) (first activity date on the HSDS portion 8-19-53) .....	94
C-3	Urinalysis Record Card and Health Sciences Data System – Urinalysis Detail (3) (first activity date on the HSDS portion: 1-6-58) .....	95
C-4	Health Sciences Data System – Urinalysis Detail (1) (first activity date 9-17-58).....	96
C-5	Health Sciences Data System – Urinalysis Detail (2) (first activity date 3-19-73).....	97
C-6	Analytical Report – Bioassay Analysis Data 3-15-93.....	98
C-7	Analytical Report – Bioassay Analysis Data 10-28-93.....	99
C-8	Form 1 – Sample Results 1-29-96.....	100
C-9	Rocky Flats Environmental Technology Site (1) 8-27-96 (analytes: <sup>238</sup> U, <sup>235</sup> U, <sup>234</sup> U).....	101
C-10	Rocky Flats Environmental Technology Site (1) 8-8-96 (analyte: <sup>239</sup> Pu) .....	102
C-11	Form 1 – Sample Results – Quanterra, Richland 7-31-98 .....	103
C-12	General Engineering Laboratories, Inc. 6-28-99.....	104
C-13	Health Sciences Urinalysis Record (with tritium, fecal, and nasal smear results) .....	105
C-14	Health Physics – Body Counter Information 12-8-65 .....	106
C-15	Health Physics – Body Counter Information 5-16-68 .....	107
C-16	Health Physics – Body Counter Information 8-26-68 .....	108
C-17	Health Physics – Body Counter Information 9-16-70 .....	109
C-18	Radiation Dosimetry – Body Count Results 10-3-74.....	110
C-19	Radiation Dosimetry – Body Count Results 5-30-75.....	111
C-20	Radiation Dosimetry – Body Count Results 1-9-78.....	112
C-21	Body Counter Results 12-8-81 .....	113
C-22	Radiation Dose Assessment – Body Count Results 7-22-83 .....	114
C-23	Radiation Dose Assessment – Body Count Results 5-18-83 .....	115
C-24	Radiation Dose Assessment – Body Count Results 2-21-84 .....	116
C-25	Radiation Dose Assessment – Body Count Results 3-22-84 .....	117
C-26	Radiation Dose Assessment – Body Count Results 10-10-85 .....	118
C-27	Radiation Dose Assessment – Body Count Results 3-6-89 .....	119
C-28	Internal Dosimetry – Lung Count Results 11-23-93.....	120
C-29	ABACOS-Plus 3-6-96.....	121
C-30	ABACOS-Plus 11-15-01.....	122
C-31	ABACOS-Plus 6-14-01.....	123

### ATTACHMENT C EXAMPLES OF BIOASSAY DATA RECORDS AND REPORTS Page 2 of 32

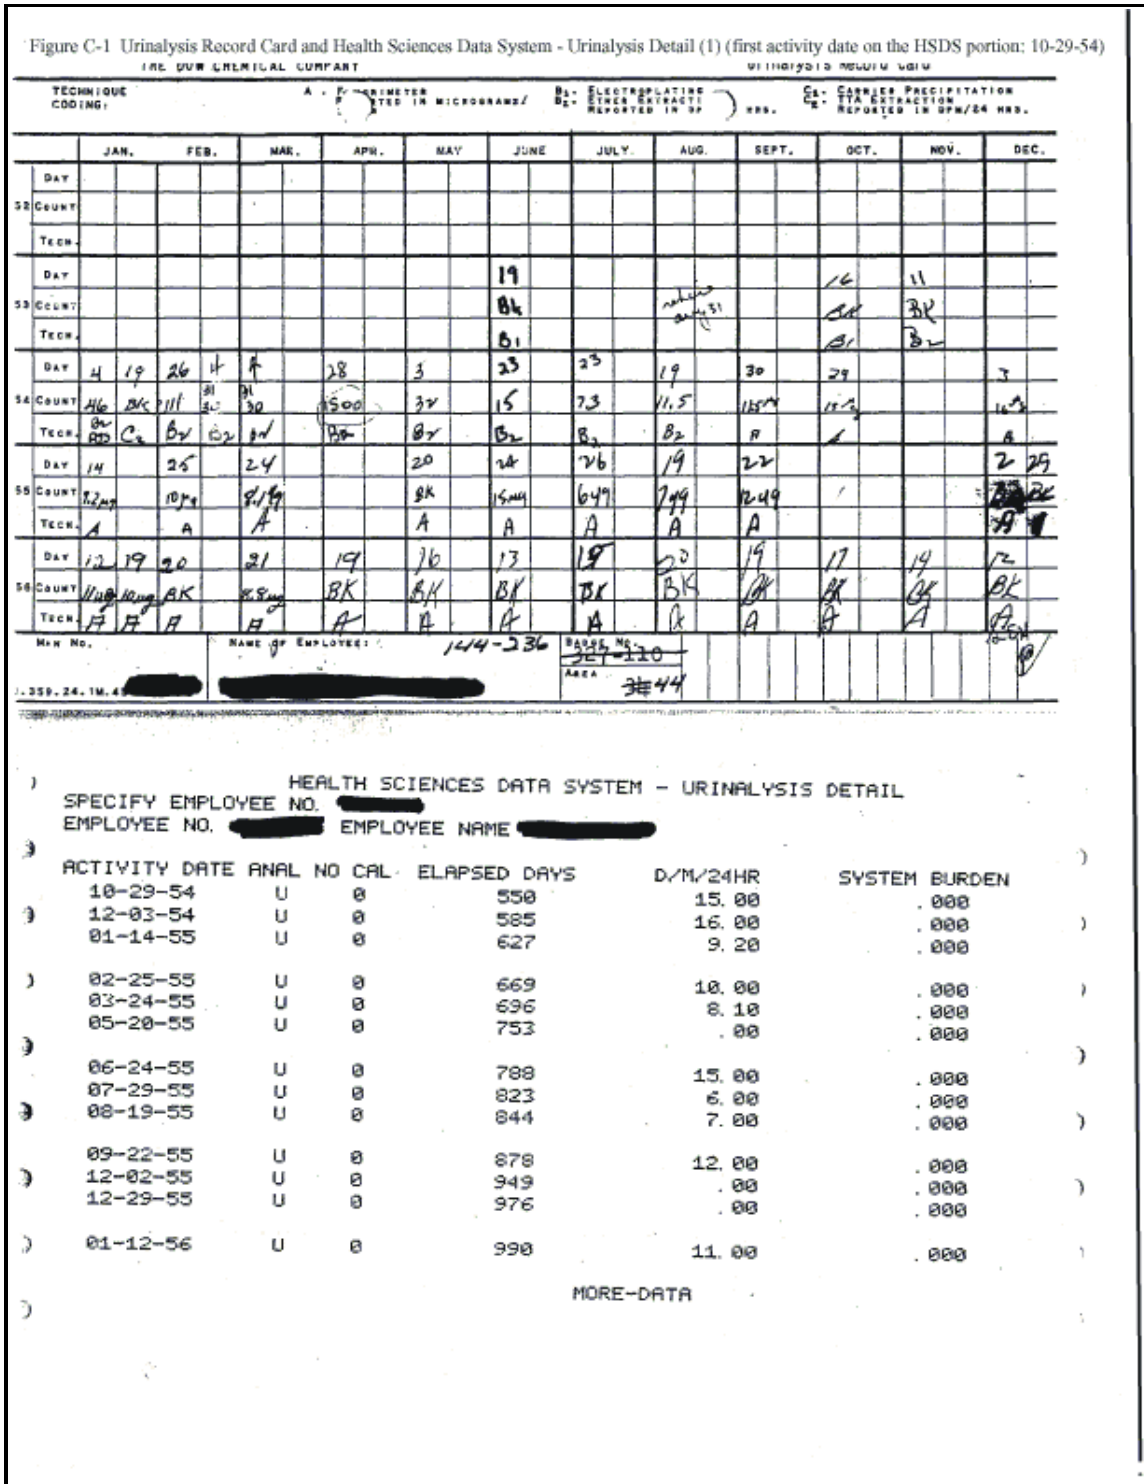


Figure C-1. Urinalysis Record Card and Health Sciences Data System – Urinalysis Detail (1) (first activity date on the HSDS portion: 10-29-54).

ATTACHMENT C
EXAMPLES OF BIOASSAY DATA RECORDS AND REPORTS
Page 3 of 32

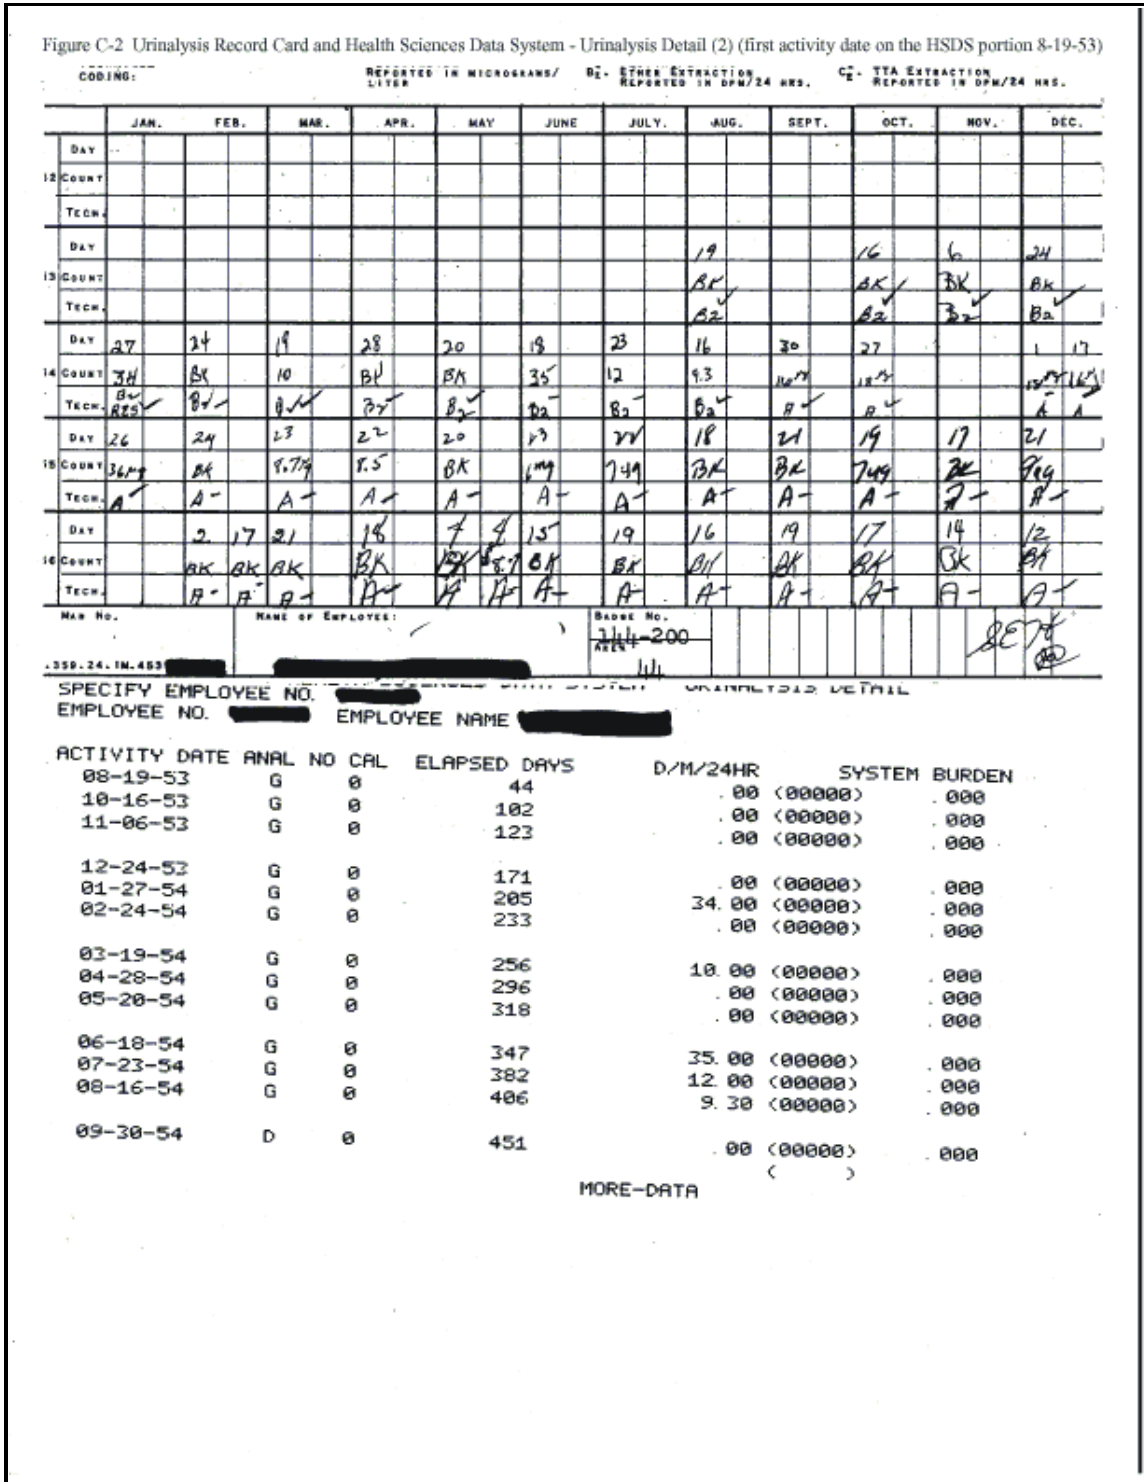


Figure C-2. Urinalysis Record Card and Health Sciences Data System – Urinalysis Detail (2) (first activity date on the HSDS portion 8-19-53).

### ATTACHMENT C EXAMPLES OF BIOASSAY DATA RECORDS AND REPORTS Page 4 of 32

Figure C-3 Urinalysis Record Card and Health Sciences Data System - Urinalysis Detail (3) (first activity date on the HSDS portion: 1-6-58)

TECHNIQUE CODING:	A-Fluorimeter Reported in micrograms/24-hrs.						B <sub>1</sub> - Electropiating B <sub>2</sub> - Ether Extraction Reported in d/m/24 hrs.		C <sub>1</sub> - Carrier Precipitation, d/m/24-hrs.			
	Jan.	Feb.	Mar.	Apr.	May	June	July	Aug.	Sept.	Oct.	Nov.	Dec.
56 Day												
56 Count												
56 Tech												
57 Day	16	14	14	17	15	27	18	15	13	11	14	11
57 Count	BK	BK	BK	BK	BK	BK	BK	BK	BK	BK	BK	BK
57 Tech	A-	A-	A-	A-	A-	A-	A-	A-	A-	A-	A-	A-
58 Day	12	6	26	24						10		
58 Count	BK	BK	BK	BK						BK		
58 Tech	A-	B1-	C1-	C1-						A-		
59 Day		24								9		
59 Count		BK								BK		
59 Tech		A-								A-		
60 Day	13			8			12			12		14
60 Count	BK			BK			BK			BK		BK
60 Tech	A-			A-			A-			A-		A-

Man No. [redacted] Name of Employee: [redacted] Badge No. 171-21 Area 144

**HEALTH SCIENCES DATA SYSTEM - URINALYSIS DETAIL**

SPECIFY EMPLOYEE NO. [redacted]

EMPLOYEE NO. [redacted] EMPLOYEE NAME [redacted]

ACTIVITY DATE	ANAL	NO	CAL	ELAPSED DAYS	D/M/24HR	SYSTEM BURDEN
01-06-58	D	0		1,644	.00 (00000)	.000
02-06-58	U	0		1,675	.00 (00000)	.000
03-26-58	P	0		1,723	.00 (00000)	.000
04-24-58	P	0		1,752	.00 (00000)	.000
10-10-58	D	0		1,921	.00 (00000)	.000
02-24-59	D	0		2,058	.00 (00000)	.000
10-09-59	D	0		2,285	.00 (00000)	.000
01-13-60	D	0		2,381	.00 (00000)	.000
04-08-60	D	0		2,467	.00 (00000)	.000
07-12-60	D	0		2,562	.00 (00000)	.000
10-12-60	D	0		2,654	.00 (00000)	.000
12-14-60	D	0		2,717	.00 (00000)	.000
01-13-61	D	0		2,746	.00 (00000)	.000

MORE-DATA

Figure C-3. Urinalysis Record Card and Health Sciences Data System – Urinalysis Detail (3) (first activity date on the HSDS portion: 1-6-58).

**ATTACHMENT C**  
**EXAMPLES OF BIOASSAY DATA RECORDS AND REPORTS**  
 Page 5 of 32

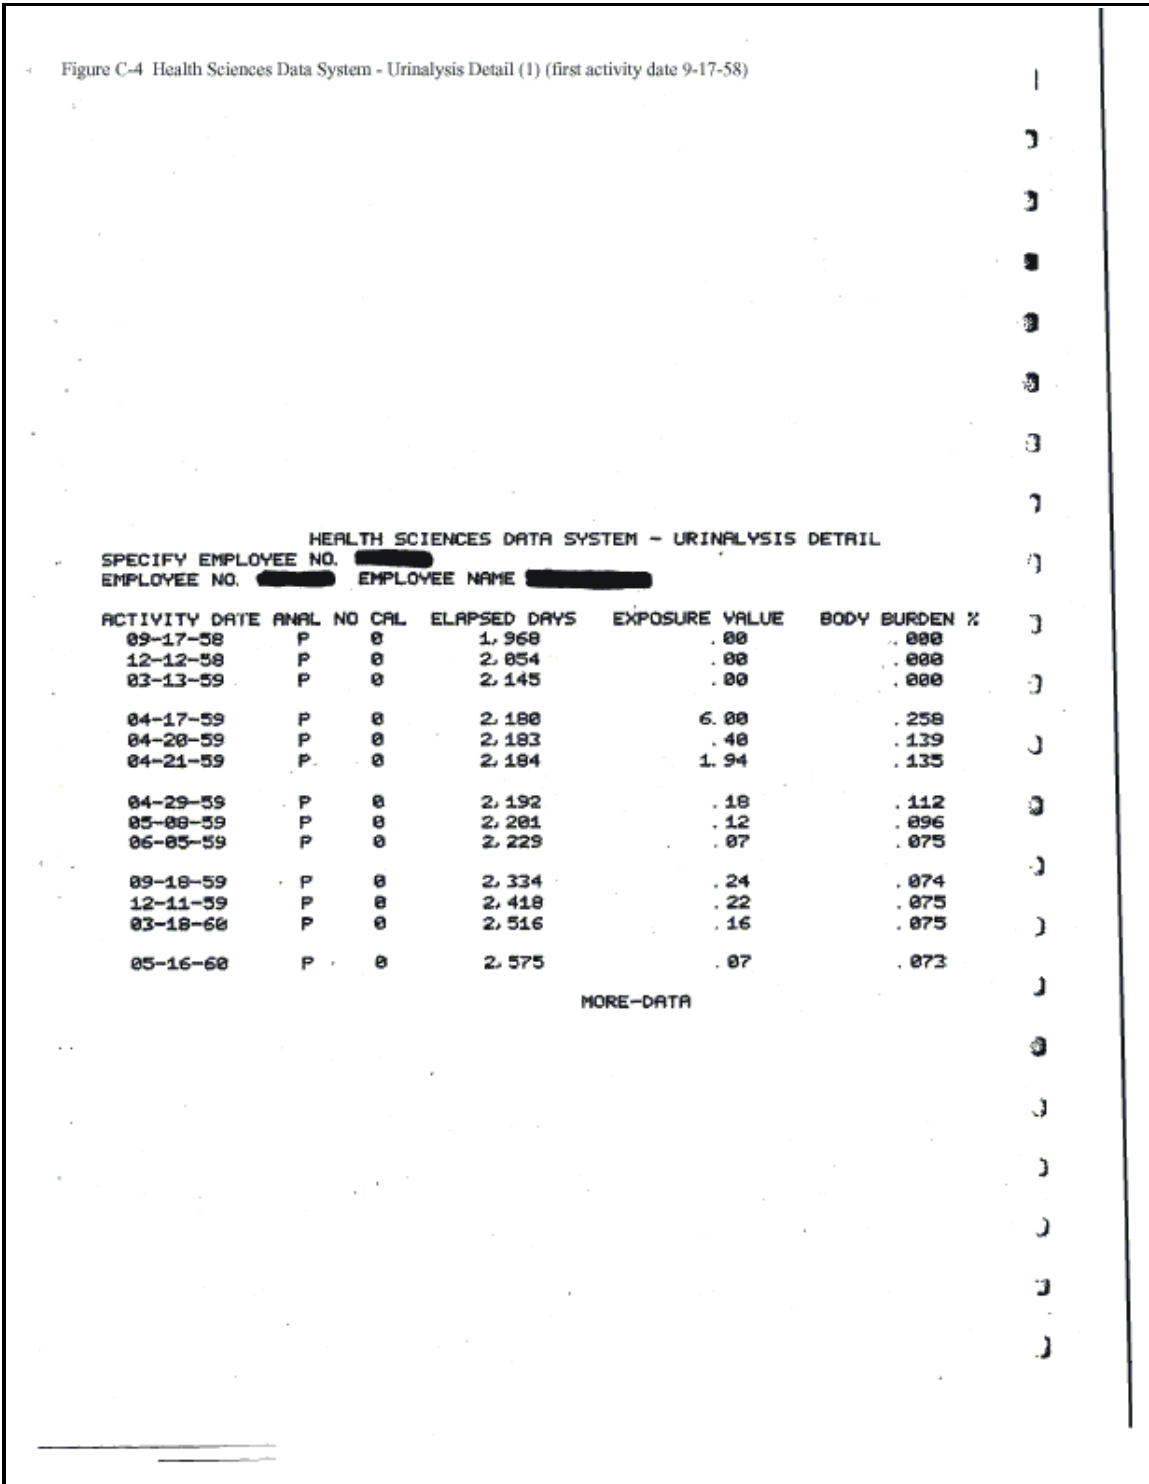


Figure C-4. Health Sciences Data System – Urinalysis Detail (1) (first activity date 9-17-58).

## ATTACHMENT C EXAMPLES OF BIOASSAY DATA RECORDS AND REPORTS

Page 6 of 32

Figure C-5 Health Sciences Data System - Urinalysis Detail (2) (first activity date: 3-19-73)

HEALTH SCIENCES DATA SYSTEM - URINALYSIS DETAIL  
SPECIFY EMPLOYEE NO. ██████████  
EMPLOYEE NO. ████████ EMPLOYEE NAME ██████████

ACTIVITY DATE	ANAL	NO CAL	ELAPSED DAYS	D/M/24HR	SYSTEM BURDEN
03-19-73	P	0	860	.09 (708 )	.000
03-14-75	P	0	1,585	.00 (708 )	.000
09-04-75	P	0	1,759	.00 (708 )	.000
09-04-75	A	0	1,759	.00 (708 )	.000
04-26-78	P	0	2,723	.08 (00000)	.005
01-30-79	P	0	3,002	.03 (00000)	.004
03-23-79	P	0	3,054	.14 (00000)	.012
03-23-79	A	0	3,054	.17 (00000)	.006
05-20-80	A	0	3,478	.03 (.109 )	.003
05-20-80	P	0	3,478	.09 (.0752)	.010
03-24-81	A	0	3,785	.00 (0.62 )	.002
03-24-81	P	0	3,785	.05 (0.03 )	.009
05-01-81	P	0	3,823	.00 (.1060)	.008

END-OF-DATA

Figure C-5. Health Sciences Data System – Urinalysis Detail (2) (first activity date 3-19-73).



**ATTACHMENT C**  
**EXAMPLES OF BIOASSAY DATA RECORDS AND REPORTS**  
 Page 8 of 32

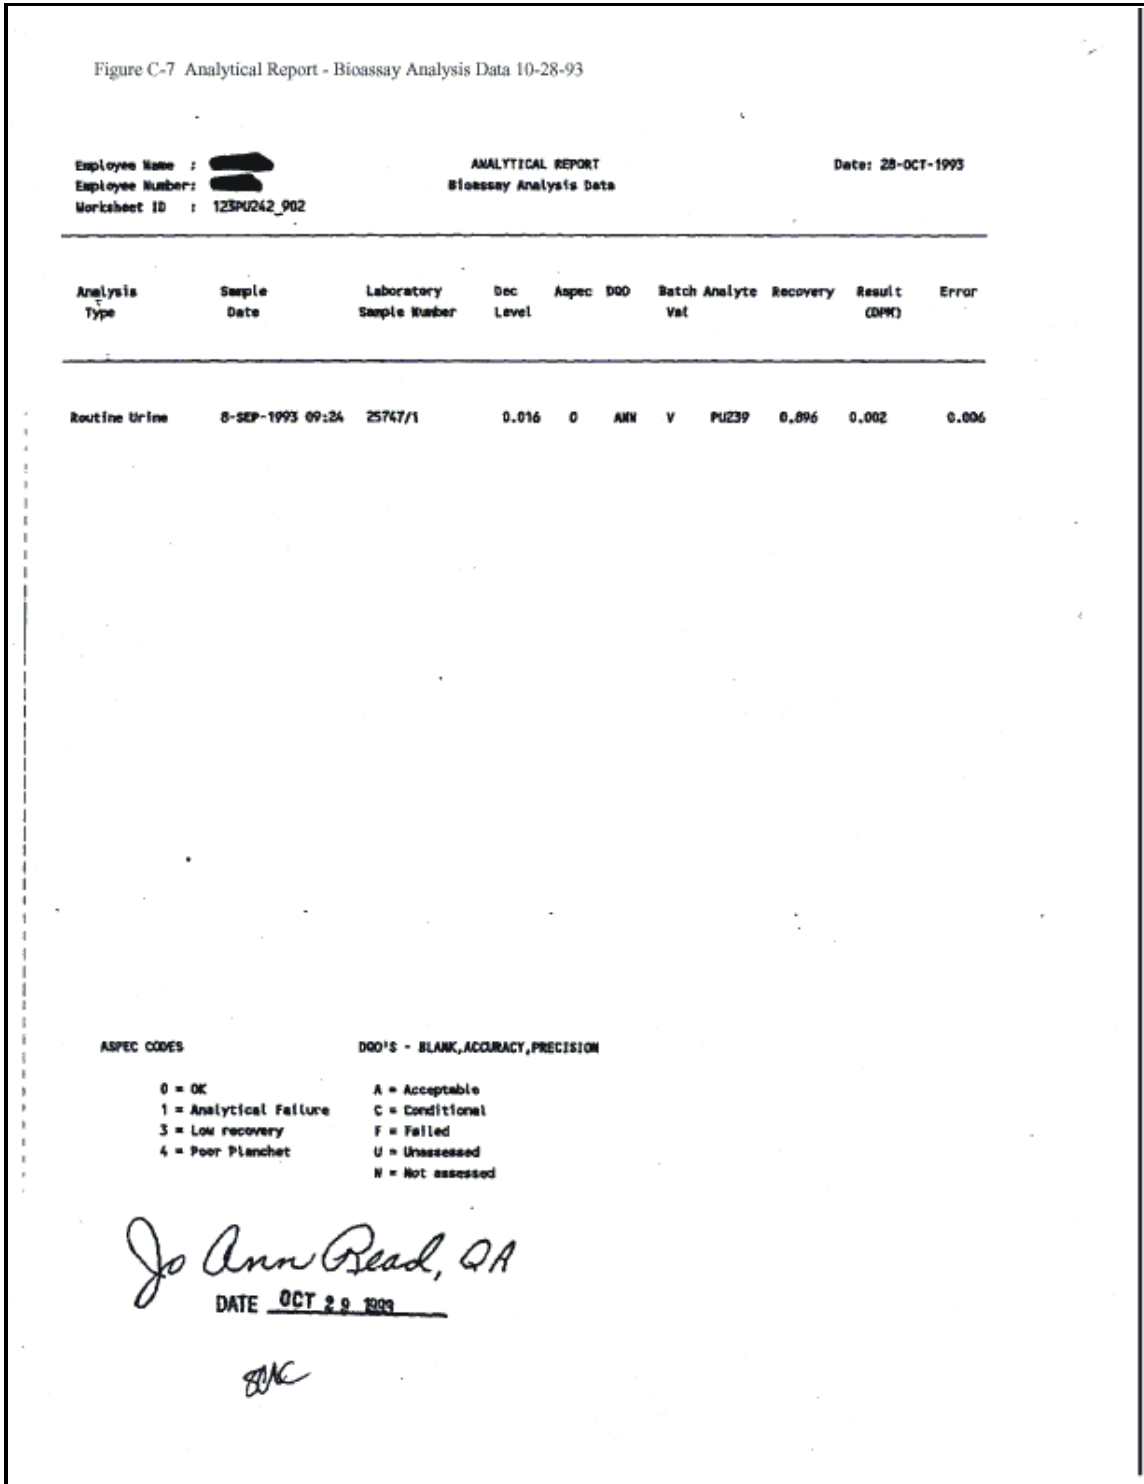


Figure C-7. Analytical Report – Bioassay Analysis Data 10-28-93.

ATTACHMENT C  
EXAMPLES OF BIOASSAY DATA RECORDS AND REPORTS  
Page 9 of 32

FORM I  
SAMPLE RESULTS

Date: 1/23/96

LAB NAME: QUANTERRA, Richland  
 LAB SAMPLE ID: 51128827  
 CLIENT ID: [REDACTED]

SDG: 5915  
 REPORT NBR: 955  
 ORDER NBR:

COLLECTION DATE: 11/21/95  
 RECEIVED DATE: 11/22/95 10:30:00 AM  
 MATRIX: URINE

ISOTOPE	RESULT	COUNTING ERROR (1σ)	TOTAL ERROR (1σ)	Lc	MDA	REPORT UNIT	ANALYSIS DATE	ALQUOT SIZE	ALQ. DETECTOR ID	METHOD NUMBER
Pu239/40	9.69E-03	3.25E-03	3.32E-03	4.44E-03	1.21E-02	cpm/ha	12/28/95	1000.3 ML	ALPHA-SPEC	RICHRC5010

YIELD: 94.90%  
 RST/MSD RET/CHTR: (3)  
 0.8

Number of Results:  1

Sample Date: 10-16-95

Comments:

Figure C-8. Form 1 – Sample Results 1-29-96.





**ATTACHMENT C**  
**EXAMPLES OF BIOASSAY DATA RECORDS AND REPORTS**  
 Page 12 of 32

Date: 7/31/98

**FORM I**  
**SAMPLE RESULTS**  
 QUANTERRA, Richland

LAB SAMPLE ID: 80709501      SDG: 10398

CLIENT ID: 98M5158-001.001      REPORT NBR: 5725

EMPLOYEE NBR: [REDACTED]      RIN NBR: 98M5158

EMPLOYEE: [REDACTED]

COLLECTION DATE: 7/2/98 7:00:00 AM

RECEIVED DATE: 7/7/98 10:30:00 AM

MATRIX: URINE

ISOTOPE	RESULT	COUNTING ERROR (1 σ)	TOTAL ERROR (1 σ)	Lc	MDA	QUAL	REPORT UNIT	YIELD	ANALYSIS DATE	TOTAL SA SIZE	ALIQOT SIZE	UNIT	DETECTOR ID	METHOD NUMBER
U-234	5.75E-02	1.45E-02	1.51E-02	1.60E-02	4.10E-02	V	dpmsamp	62.80%	7/25/98	1594.7	1594.7	ML	ALPHA-SPEC	RICHRC5030
U-235	1.45E-03	4.90E-03	4.94E-03	6.34E-03	2.17E-02	V	dpmsamp	62.80%	7/25/98	1594.7	1594.7	ML	ALPHA-SPEC	RICHRC5030
U-238	2.54E-02	1.12E-02	1.15E-02	1.53E-02	3.95E-02	V	dpmsamp	62.80%	7/25/98	1594.7	1594.7	ML	ALPHA-SPEC	RICHRC5030
PU239/40	-2.91E-03	1.65E-03	1.80E-03	7.22E-03	1.94E-02	V	dpmsamp	75.20%	7/24/98	1594.7	1594.7	ML	ALPHA-SPEC	RICHRC5010

Number of Results: 4

0018

\_\_\_\_\_  
 (Validated by) *[Signature]*      Date: 8/3/98

\_\_\_\_\_  
 (Validated by) *[Signature]*      Date: 8/3/98

\_\_\_\_\_  
 (Validated by) *[Signature]*      Date: 8/3/98

Comments:

Figure C-11 Form 1 - Sample Results - Quanterra, Richland 7-31-98

Figure C-11. Form 1 – Sample Results – Quanterra, Richland 7-31-98.

**ATTACHMENT C**  
**EXAMPLES OF BIOASSAY DATA RECORDS AND REPORTS**  
 Page 13 of 32

Figure C-12 General Engineering Laboratories, Inc. 6-28-99

General Engineering Laboratories, Inc.

**Employee Name:**

**Employee Number:** [REDACTED]      **Date Received:** 28-JUN-99

**Lab ID:** 9906900-06      **Date Collected:** 6/24/99 0600

**RIN #:** 99M8334      **Date Reported:** 7/21/99

**Sample #:** 99M8334-006.001      **Sample Type:** Urine

Parameter	Result	Uncertainty (1-Sigma)	Lc	MDA	Units	VF	Yield	Run Date	Sample Volume mL	Batch	Data Validation Code
Uranium-238	0.0244	0.0137	0.0258	0.0663	DPM/S	1.00	48.31	11-JUL-99	1802	152239	V 998 7/22/99
Uranium-235	0.0018	0.0092	0.0257	0.0662	DPM/S	1.00	48.31	11-JUL-99	1802	152239	V 998 7/22/99
Uranium-233/234	-0.0054	0.0110	0.0315	0.0776	DPM/S	1.00	48.31	11-JUL-99	1802	152239	V 998 7/22/99
Plutonium-239/240	-0.0008	0.0030	0.0060	0.0157	DPM/S	1.00	94.69	11-JUL-99	1802	152239	V 998 7/22/99

**Comments:**

This data report has been prepared and reviewed in accordance with General Engineering Laboratories, Inc. standard operating procedures.

Validated By: *[Signature]*

Page 1 of 1

019

Figure C-12. General Engineering Laboratories, Inc. 6-28-99.

**ATTACHMENT C**  
**EXAMPLES OF BIOASSAY DATA RECORDS AND REPORTS**  
 Page 14 of 32

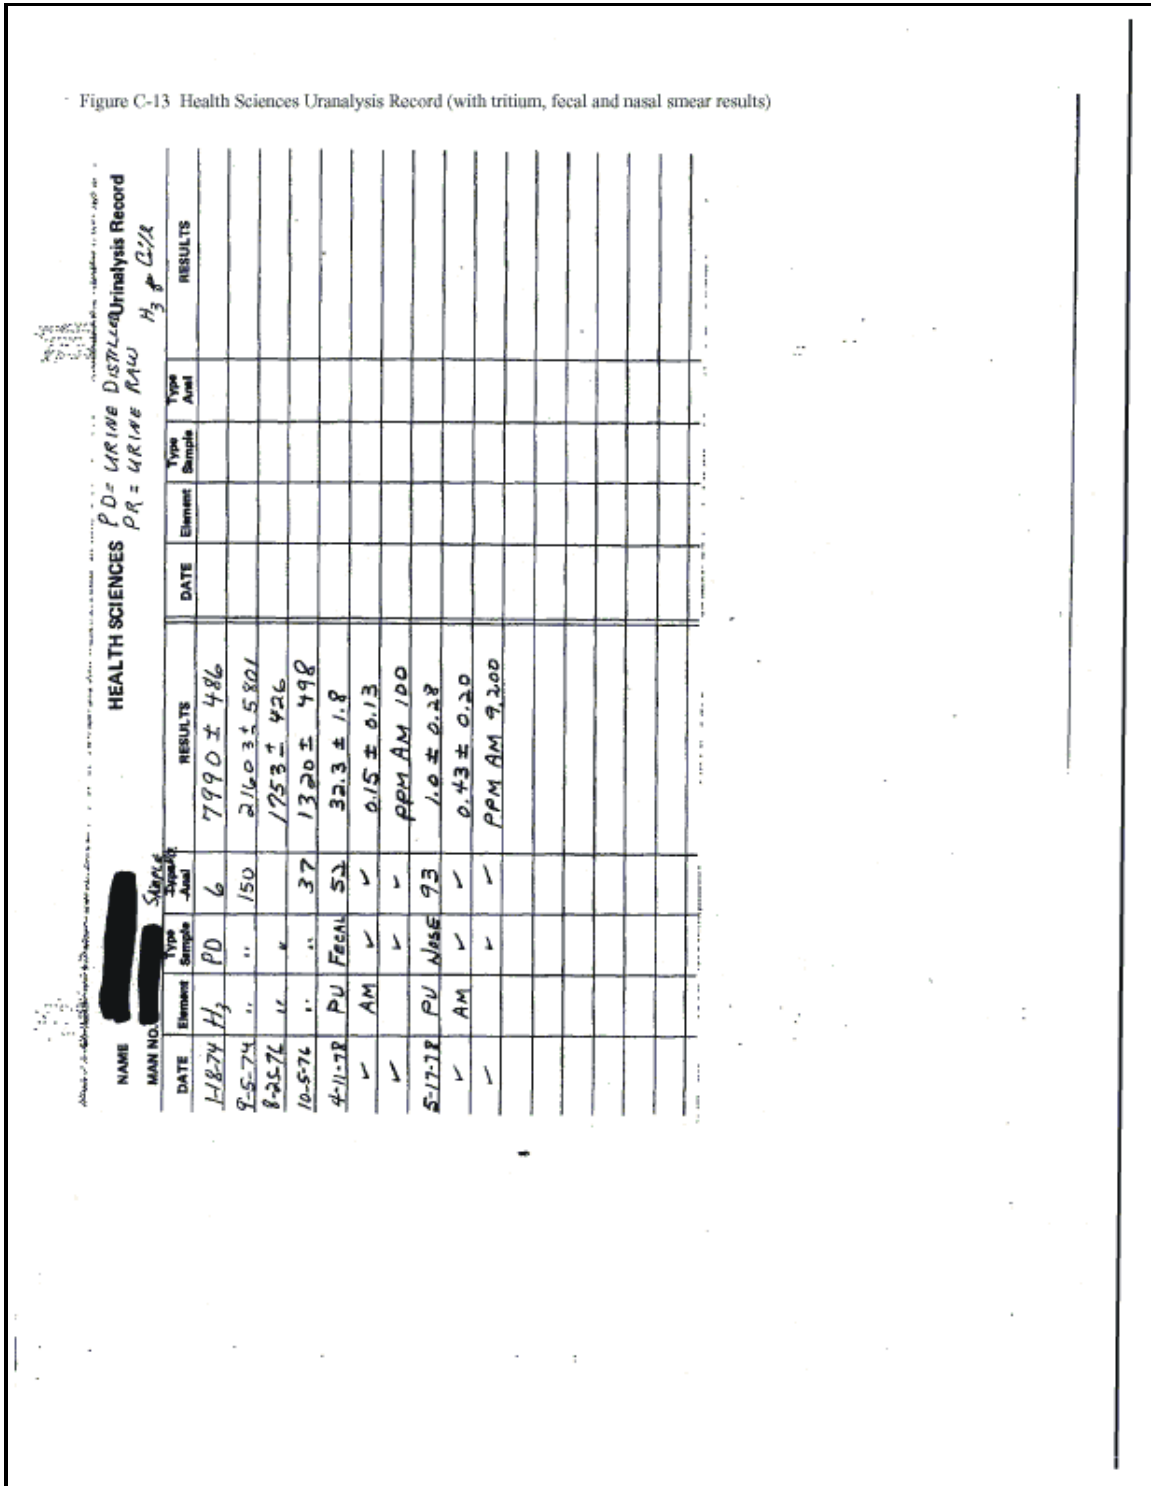


Figure C-13. Health Sciences Urinalysis Record (with tritium, fecal, and nasal smear results).



**ATTACHMENT C**  
**EXAMPLES OF BIOASSAY DATA RECORDS AND REPORTS**  
 Page 16 of 32

Figure C-15 Health Physics - Body Counter Information 5-16-68

**HEALTH PHYSICS**  
**BODY COUNTER INFORMATION**

Circulate:  
~~\_\_\_\_\_~~  
~~\_\_\_\_\_~~  
~~\_\_\_\_\_~~  
~~\_\_\_\_\_~~  
~~\_\_\_\_\_~~  
 Pers. File

Name: [REDACTED] Man No.: [REDACTED] Date 5-16-68 Time 10:00

Reason for Counting: 76 Fire

Detector	Body Location	Isotope	Kev	Net (1) c/m	Mean	Net (2) c/m	μg
#1 : 4"x4mm NaI Crystal	<u>R chest</u>	<u>Am</u>	<u>60</u>	<u>52.2</u>	<u>34.9</u>	<u>17.3</u>	<u>0.0065</u>
#2 : 4"x4mm NaI Crystal	<u>L chest</u>	<u>Am</u>	<u>60</u>	<u>46.6</u>	<u>34.9</u>	<u>11.7</u>	<u>0.044</u>
#3 : 9"x4" NaI Crystal							

nci Cs<sup>137</sup> ; \_\_\_\_\_ g R

(1) Gross c/m — Background  
 (2) Gross c/m — Bkgd. — Match subject

Tally  
 Operator

White copy: Circulate  
 Blue copy: To H. P. area office

BF-27740 (Rev. 3-67) Prev. Issues May Be Used

Figure C-15. Health Physics – Body Counter Information 5-16-68.

ATTACHMENT C  
EXAMPLES OF BIOASSAY DATA RECORDS AND REPORTS  
Page 17 of 32

HEALTH PHYSICS Figure C-16 Health Physics - Body Counter Information 8-26-68  
 BODY COUNTER INFORMATION

CIRCULATE:  
~~C.M.P.~~  
~~E.A.P.~~  
~~G.R.L.~~  
~~J.R.M.~~  
 PERS. FILE ✓

NAME: [REDACTED] MAN. NO. [REDACTED] DATE: 8-26-68 TIME: 1030

REASON FOR COUNTING:

BODY LOCATION	NET C/M	PREDICTED C/M	RESULT	INTERPRETATION OF DATA
LEFT CHEST	48.6	24.4	24.2	0.092 mg.
RIGHT CHEST				
LIVER	34.1	28.9	5.2	0.015 mg.
				X

REMARKS:

EVAL. SAMPLING:  
 NON REQUESTED       NEXT SAMPLE       CONTINUOUSLY

DISTRIBUTION:  
 WHITE-CIRCULATE  
 BLUE-TO H.P. AREA OFFICE

OPERATOR: Tally

1-27740 (Rev. 7-68) PREVIOUS EDITION MAY BE USED

Figure C-16. Health Physics – Body Counter Information 8-26-68.

**ATTACHMENT C**  
**EXAMPLES OF BIOASSAY DATA RECORDS AND REPORTS**  
 Page 18 of 32

Figure C-17 Health Physics - Body Counter Information 9-16-70

**HEALTH PHYSICS  
 BODY COUNTER INFORMATION**

CIRCULATE:  
 C.W.P.  
 E.P.  
 C.R.L.  
 S.H.  
 J.W.M.  
 PERS. FILE

NAME: [REDACTED] MAN. NO. [REDACTED] DATE: 9-16-70 TIME: 1100

REASON FOR COUNTING:  
*Pontiac*

BODY LOCATION	NET C/M	PREDICTED C/M	RESULT	INTERPRETATION OF DATA
LEFT CHEST	41.3	36.2		
RIGHT CHEST	46.8	"		
LIVER	42.8	40.0		

REMARKS:  
*Index 1.40*

FECAL SAMPLING:  
 NON REQUESTED       NEXT SAMPLE       CONTINUOUSLY

DISTRIBUTION:  
 WHITE- CIRCULATE  
 BLUE- To H.P. AREA OFFICE

OPERATOR: *Toely*

Figure C-17. Health Physics – Body Counter Information 9-16-70.

**ATTACHMENT C**  
**EXAMPLES OF BIOASSAY DATA RECORDS AND REPORTS**  
 Page 19 of 32

Figure C-18 Radiation Dosimetry - Body Count Results 10-3-74

**PERSONAL & CONFIDENTIAL**

**RADIATION DOSIMETRY**  
**BODY COUNT RESULTS**

NAME: [REDACTED]		MAN NO: [REDACTED]		DATE: 10-3-74	TIME: 0930					
INDEX NUMBER: 165		ROOM: A B C								
REASON FOR COUNTING: <input type="checkbox"/> NEW <i>Quarterly</i> <input checked="" type="checkbox"/> RECOUNT <input type="checkbox"/> ROUTINE <input type="checkbox"/> TERMINATION										
<input type="checkbox"/> POSSIBLE INHALATION <input type="checkbox"/> REQUEST BY: _____										
BUILDING:		ROOM:		LINE OR OPERATION:						
BODY LOCATION	NET C/M	PREDICTED C/M	RESULT C/M	nCi Pu	MPLB Pu	nCi Am	MPLB Am	RATIO		
RIGHT CHEST	45.2	34.3	10.9	3.42				1.361		
LEFT CHEST	42.2	33.5	8.7	2.73				1.218		
GUT										
TOTAL CHEST			19.6	6.15	0.38	0.66	0.04			
REMARKS:										
INCIDENT SAMPLE: ppm <sup>241</sup> Am <u>2041 (calc)</u> Chemical Form: _____ Solubility: _____										
URINE SAMPLING: <input type="checkbox"/> NONE REQUESTED <input type="checkbox"/> OVERNIGHT SAMPLE <input type="checkbox"/> CONTINUOUSLY										
FECAL SAMPLING: <input type="checkbox"/> NONE REQUESTED <input type="checkbox"/> NEXT SAMPLE <input type="checkbox"/> CONTINUOUSLY										
TECHNICIAN: <i>R. P. Paschke</i>						SUPERVISOR:				

**PERSONAL & CONFIDENTIAL**

DET. 986 (12-73)

Figure C-18. Radiation Dosimetry – Body Count Results 10-3-74.

**ATTACHMENT C**  
**EXAMPLES OF BIOASSAY DATA RECORDS AND REPORTS**  
 Page 20 of 32

Figure C-19 Radiation Dosimetry = Body County Results 5-30-75

**RADIATION DOSIMETRY  
 BODY COUNT RESULTS**

NAME: [REDACTED]		MAN NO.: [REDACTED]		DATE: 5-30-75	TIME: 1000
INDEX NUMBER: 1.55	ROOM: A B C				
REASON FOR COUNTING: <input type="checkbox"/> NEW <input type="checkbox"/> RECOUNT <input checked="" type="checkbox"/> ROUTINE <input type="checkbox"/> TERMINATION					
<input type="checkbox"/> POSSIBLE INHALATION <input type="checkbox"/> REQUEST BY: _____					
BUILDING:		ROOM:		LINE OR OPERATION:	

BODY LOCATION	NET C/M	PREDICTED C/M	RESULT C/M	nCi Pu	MPLB Pu	nCi Am	MPLB Am	RATIO
60 KEV RIGHT CHEST	36.9	33.2	Bkgd					1.13
60 KEV LEFT CHEST	36.2	32.6	Bkgd					1.10
17 KEV RIGHT CHEST								
17 KEV LEFT CHEST								
TOTAL CHEST								

REMARKS:

---



---



---



---

INCIDENT SAMPLE: ppm <sup>241</sup>Am \_\_\_\_\_ Chemical Form \_\_\_\_\_ Solubility \_\_\_\_\_

URINE SAMPLING:  NONE REQUESTED  OVERNIGHT SAMPLE  CONTINUOUSLY

FECAL SAMPLING:  NONE REQUESTED  NEXT SAMPLE  CONTINUOUSLY

TECHNICIAN: RGF <i>RGF</i>	SUPERVISOR:
-------------------------------	-------------

RFT-285 (12-73) PERSONAL & CONFIDENTIAL

Figure C-19. Radiation Dosimetry – Body Count Results 5-30-75.

**ATTACHMENT C**  
**EXAMPLES OF BIOASSAY DATA RECORDS AND REPORTS**  
 Page 21 of 32

Figure C-20 Radiation Dosimetry - Body Count Results 1-9-78

PERSONAL - PRIVILEGED  
 INFORMATION

RADIATION DOSIMETRY  
 BODY COUNT RESULTS

NAME: [REDACTED] MAN NO: [REDACTED] DATE: 1-9-78 TIME: 0845

INDEX NUMBER: 1180 ROOM: A B C

REASON FOR COUNTING:  NEW  RECOUNT  ROUTINE  TERMINATION  
 POSSIBLE INHALATION  REQUEST BY: \_\_\_\_\_

BUILDING: \_\_\_\_\_ ROOM: \_\_\_\_\_ LINE OR OPERATION: \_\_\_\_\_

BODY LOCATION	NET C/M	PREDICTED C/M	RESULT C/M	nCi Pu	MPLB Pu	nCi Am	MPLB Am	RATIO
60 KEV RIGHT CHEST								
60 KEV LEFT CHEST								
17 KEV RIGHT CHEST								
17 KEV LEFT CHEST								
TOTAL CHEST	8.19	3.11	5.08 ± 0.50	6.4	0.40	0.81	0.055	

REMARKS:  
 Ge Array Hybrid  
 Calibration Factor Pu: 4.90 c/m per 16 µg Pu @ 1000 ppm Am; 12.67 c 2585 ppm Am  
 Am: 6.25 c/m per nCi Am

INCIDENT SAMPLE: ppm <sup>241</sup>Am 2585 (total) Chemical Form \_\_\_\_\_ Solubility \_\_\_\_\_

URINE SAMPLING:  NONE REQUESTED  OVERNIGHT SAMPLE  CONTINUOUSLY

FECAL SAMPLING:  NONE REQUESTED  NEXT SAMPLE  CONTINUOUSLY

TECHNICIAN: RBF SUPERVISOR: \_\_\_\_\_

RFT-285 (12-73)

PERSONAL - PRIVILEGED

Figure C-20. Radiation Dosimetry – Body Count Results 1-9-78.

ATTACHMENT C  
EXAMPLES OF BIOASSAY DATA RECORDS AND REPORTS  
Page 22 of 32

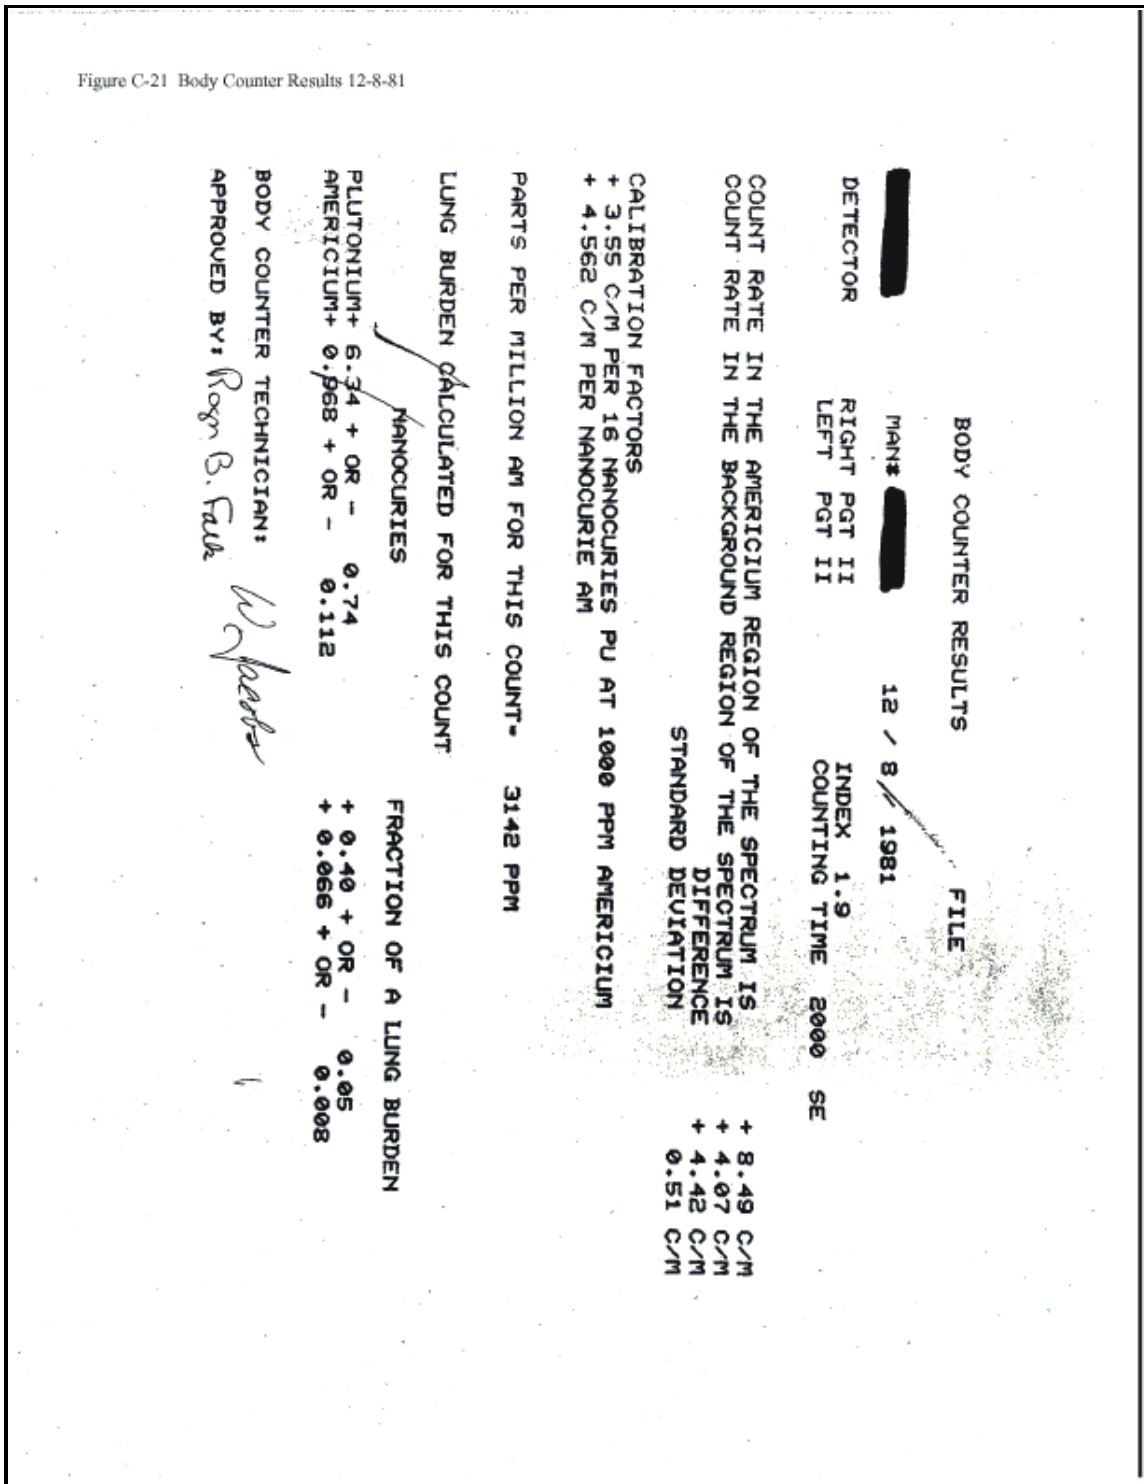


Figure C-21. Body Counter Results 12-8-81.

ATTACHMENT C
EXAMPLES OF BIOASSAY DATA RECORDS AND REPORTS
Page 23 of 32

Figure C-22 Radiation Dose Assessment - Body Count Results 7-22-83
PERSONAL-PRIVILEGED INFORMATION
RADIATION DOSE ASSESSMENT
BODY COUNT RESULTS
NAME: [REDACTED] EMPLOYEE #: [REDACTED]
DATE: 7/22/83 12:45 PM ROOM # B
COUNT TIME 2000 SEC INDEX #: 1.2318
BLDG #: 334 ROOM#: OPERATION:
REASON FOR COUNT: --NEW --X ROUTINE --TERMINATION
DETECTORS: RIGHT: PHOSWICH LEFT: PHOSWICH
60 & 63 KEV 93 KEV
GROSS CT/MIN = 33.78 GROSS CT/MIN = 33.66
BKG CT/MIN = 33.66 BKG CT/MIN = 32.46
NET CT/MIN = 0.12 NET CT/MIN = 1.20
STD DEV = 1.42 STD DEV = 1.41
CUTOFF = 2.34 CUTOFF = 2.32
ROI 2 ROI 3 ROI 4 ROI 5
SUM 593 1126 1122 1082
RESULTS ARE NORMAL
URINE SAMPLING: --X NONE -- OVERNIGHT
-- 24 HOUR -- THREE 24 HOUR
FECAL SAMPLING: --X NONE -- ONE SAMPLE
-- 3 SAMPLES
BODY COUNTER TECHNICIAN: W. Jacobs
APPROVED BY: Roger B. Bell

Figure C-22. Radiation Dose Assessment – Body Count Results 7-22-83.

ATTACHMENT C
EXAMPLES OF BIOASSAY DATA RECORDS AND REPORTS
Page 24 of 32

Figure C-23 Radiation Dose Assessment - Body Count Results 5-13-83
PERSONAL-PRIVILEGED INFORMATION
RADIATION DOSE ASSESSMENT
BODY COUNT RESULTS
NAME: [REDACTED] EMPLOYEE #: [REDACTED]
DATE: 5/13/83 10:38 AM ROOM # A
COUNT TIME 2000 SEC INDEX #: 1.4758
BLDG #: 778 ROOM#: OPERATION:
REASON FOR COUNT: -- NEW RECOUNT [X] ROUTINE (PH) -- TERMINATION
-- POSSIBLE INHALATION ( ) --
DETECTORS: RIGHT: PGT-1 LEFT: PGT-1
AM-241/PLUTONIUM TH-234/U-238
GROSS CT/MIN = 4.98 GROSS CT/MIN = 5.16
BKG CT/MIN = 4.39 BKG CT/MIN = 4.99
NET CT/MIN = 0.59 NET CT/MIN = 0.17
STD DEV = 0.43 STD DEV = 0.43
CUTOFF = 0.70 CUTOFF = 0.71
ROI 2 ROI 3 ROI 4 ROI 5 ROI 6 ROI 7 ROI 8 ROI 9 ROI10 ROI11
SUM 870 166 172 585 543 407 129 221 68 94
RESULTS ARE NORMAL
URINE SAMPLING: [X] NONE -- OVERNIGHT
24 HOUR -- THREE 24 HOUR
FECAL SAMPLING: [X] NONE -- ONE SAMPLE
3 SAMPLES
BODY COUNTER TECHNICIAN: [Signature]
APPROVED BY: [Signature]

Figure C-23. Radiation Dose Assessment – Body Count Results 5-18-83.

**ATTACHMENT C**  
**EXAMPLES OF BIOASSAY DATA RECORDS AND REPORTS**  
 Page 25 of 32

Figure C-24 Radiation Dose Assessment - Body Count Results 2-21-84

PERSONAL-PRIVILEGED INFORMATION

RADIATION DOSE ASSESSMENT  
 BODY COUNT RESULTS

NAME: [REDACTED] EMPLOYEE #: [REDACTED] ✓  
 DATE: 2/21/84 1:27 PM ROOM # A  
 COUNT TIME 2000 SEC INDEX #: 1.2291  
 BUILD\* #: 444 ROOM#: OPERATION:  
 REASON FOR COUNT:  NEW  RECOUNT  ROUTINE  TERMINATION  
 POSSIBLE INHALATION ( PPM)  
 OTHER

DETECTORS: RIGHT: PGT-1 LEFT: PGT-1

AM-241/PLUTONIUM	TH-234/U-238
GROSS CT/MIN = 4.56	GROSS CT/MIN = 5.07
BKG CT/MIN = 3.98	BKG CT/MIN = 4.51
NET CT/MIN = 0.58	NET CT/MIN = 0.56
STD DEV = 0.41	STD DEV = 0.43
CUTOFF = 0.67	CUTOFF = 0.70

**RESULTS ARE NORMAL**

L-XRAY	60KEV	63KEV	BKG	13KEV	17KEV	93KEV	93BKG	185KEV	185BKG	
SUM	739	152	169	530	682	290	188	119	89	151

URINE SAMPLING:  NONE  OVERNIGHT  24 HOUR  THREE 24 HOUR  
 CAL SAMPLING:  NONE  ONE SAMPLE  3 SAMPLES

BODY COUNTER TECHNICIAN: *W. Jacobs*  
 APPROVED BY: *Roger B. Elk*

Figure C-24. Radiation Dose Assessment – Body Count Results 2-21-84.

### ATTACHMENT C EXAMPLES OF BIOASSAY DATA RECORDS AND REPORTS

Page 26 of 32

Figure C-25 Radiation Dose Assessment - Body Count Results 3-22-84

PERSONAL-PRIVILEGED INFORMATION

RADIATION DOSE ASSESSMENT  
BODY COUNT RESULTS

NAME: ██████████ EMPLOYEE #: ██████████  
 DATE: 3/22/84 2:55 PM ROOM # A  
 COUNT TIME 2000 SEC INDEX #: 1.8115  
 BUILD #: 881 ROOM#: OPERATION:  
 REASON FOR COUNT:  NEW  RECOUNT  ROUTINE  TERMINATION  
 POSSIBLE INHALATION (PPM)  
 OTHER

DETECTORS: RIGHT: PGT-1 LEFT: PGT-1

AM-241/PLUTONIUM				TH-234/U-238					
GROSS CT/MIN =	9.12	GROSS CT/MIN =	4.26						
BKG CT/MIN =	4.25	BKG CT/MIN =	4.78						
NET CT/MIN =	4.87	NET CT/MIN =	-0.52						
STD DEV =	0.55	STD DEV =	0.40						

L-XRAY	60KEV	63KEV	BKG	13KEV	17KEV	93KEV	93BKG	185KEV	185BKG	
SUM	794	304	142	567	715	306	196	129	74	128

CALIBRATION FACTORS

CT/MIN PER 16 NANOCURIE PU @ 1000 PPM AM-241 = 4.19  
 CT/MIN PER NANOCURIE AM-241 = 5.392  
 PPM TODAY AM-241 = 3420 PPM

LUNG BURDEN CALCULATED FOR THIS COUNT

NANOCURIES	FRACTION OF LUNG BURDEN			
PU-239 = 5.43 +- 0.62	0.34 +- 0.04			
AM-241 = 0.903 +- 0.103	0.061 +- 0.007			

URINE SAMPLING:  NONE  OVERNIGHT  24 HOUR  THREE 24 HOUR  
 FECAL SAMPLING:  NONE  ONE SAMPLE  3 SAMPLES

BODY COUNTER TECHNICIAN: *M. Moraitz*  
 APPROVED BY: *Roger B. Felt*

Figure C-25. Radiation Dose Assessment – Body Count Results 3-22-84.

**ATTACHMENT C**  
**EXAMPLES OF BIOASSAY DATA RECORDS AND REPORTS**  
 Page 27 of 32

Figure C-26 Radiation Dose Assessment - Body Count Results 10-10-85

PERSONAL-PRIVILEGED INFORMATION

RADIATION DOSE ASSESSMENT  
 BODY COUNT RESULTS

NAME: [REDACTED] EMPLOYEE #: [REDACTED] ✓  
 DATE: 10/10/85 9:51 AM ROOM # C  
 COUNT TIME 2000 SEC INDEX #: 1.2235  
 BUILD #: 778 ROOM#: OPERATION:  ROUTINE  TERMINATION  
 REASON FOR COUNT:  NEW  RECOUNT  POSSIBLE INHALATION ( \_\_\_\_\_ PPM)  
 OTHER

DETECTORS: RIGHT: PGT-2 LEFT: PGT-2

AM-241/PLUTONIUM		TH-234/U-238	
GROSS CT/MIN =	3.84	GROSS CT/MIN =	4.71
BKG CT/MIN =	4.51	BKG CT/MIN =	4.76
NET CT/MIN =	-0.67	NET CT/MIN =	-0.05
STD DEV =	0.39	STD DEV =	0.42
CUTOFF =	0.63	CUTOFF =	0.69

**RESULTS ARE NORMAL**

L-XRAY	60KEV	63KEV	BKG	13KEV	17KEV	93KEV	93BKG	185KEV	185BKG	
SUM	119407	128	157	601	90860	88124	144	187	56	78

URINE SAMPLING:  NONE  OVERNIGHT  24 HOUR  THREE 24 HOUR  
 FECAL SAMPLING:  NONE  ONE SAMPLE  3 SAMPLES

BODY COUNTER TECHNICIAN: *J. Barnett*  
 APPROVED BY: *Rozon B. [Signature]*

Figure C-26. Radiation Dose Assessment – Body Count Results 10-10-85.

ATTACHMENT C  
EXAMPLES OF BIOASSAY DATA RECORDS AND REPORTS  
Page 28 of 32

Figure C-27 Radiation Dose Assessment - Body Count Results 3-6-89

SUM 638 1619 16 1090  
PERSONAL-PRIVILEGED INFORMATION

RADIATION DOSE ASSESSMENT  
BODY COUNT RESULTS

NAME: [REDACTED] EMPLOYEE #: [REDACTED] ✓  
DATE: 2/09/87 11:09 AM ROOM # B  
COUNT TIME 2000 SEC INDEX #: 1.2910  
BLDG #: 778 ROOM#: OPERATION:

REASON FOR COUNT: NEW ROUTINE TERMINATION  
DETECTORS: RIGHT: PHOSWICH LEFT: PHOSWICH

60 & 63 KEV		93 KEV	
GROSS CT/MIN =	47.57	GROSS CT/MIN =	49.71
BKG CT/MIN =	49.71	BKG CT/MIN =	47.85
NET CT/MIN =	-2.14	NET CT/MIN =	1.86
STD DEV =	1.72	STD DEV =	1.71
CUTOFF =	2.82	CUTOFF =	2.81

ROI 2 ROI 3 ROI 4 ROI 5  
SUM 638 1619 1657 1595

RESULTS ARE NORMAL

URINE SAMPLING:  NONE  OVERNIGHT  
 24 HOUR  THREE 24 HOUR  
FECAL SAMPLING:  NONE  ONE SAMPLE  
 3 SAMPLES

BODY COUNTER TECHNICIAN: [Signature]  
APPROVED BY: [Signature]

Figure C-27. Radiation Dose Assessment – Body Count Results 3-6-89.

## ATTACHMENT C EXAMPLES OF BIOASSAY DATA RECORDS AND REPORTS

Page 29 of 32

Figure C-28 Internal Dosimetry - Lung Count Results 11-23-93

**EG&G ROCKY FLATS**  
RADIOLOGICAL HEALTH

### ANALYTICAL REPORT

---

PERSONAL-PRIVILEGED INFORMATION

INTERNAL DOSIMETRY  
LUNG COUNT RESULTS

NAME: ██████████ EMPLOYEE #: ██████████  
 DATE: 11/23/93 11:08 AM ROOM # 8  
 COUNT TIME 2000 SEC INDEX #: 1.3615  
 BUILD #: ██████████ ROOM#: ██████████ OPERATION:  
 REASON FOR COUNT:  NEW  RECOUNT  ROUTINE  SEPARATION  
 POSSIBLE INHALATION (PPM)  OTHER Per 00

DETECTORS: RIGHT: EG&G 1, PGT OP 2,3,4 LEFT: EG&G 5, PGT OP 6

AM-241/PLUTONIUM	TH-234/U-238	63KEV	93 KEV
GROSS CT/MIN = 12.69	GROSS CT/MIN = 4.38		3.78
BKG CT/MIN = 3.82	BKG CT/MIN = 4.12		3.41
NET CT/MIN = 8.87	NET CT/MIN = 0.26		0.37
STD DEV = 0.64	STD DEV = 0.40		0.40

	L-XRAY	60KEV	63KEV	BKG	13KEV	17KEV	93KEV	93BKG	185KEV	185BKG
ADC #1	91	60	21	86	30	39	19	29	18	24
ADC #2	126	94	19	73	49	60	17	42	15	26
ADC #3	194	53	29	92	529	106	22	32	8	22
ADC #4	121	40	23	102	49	52	25	40	16	29
ADC #5	83	113	17	78	27	43	18	34	18	35
ADC #6	119	43	37	82	52	66	25	38	17	26
ADC #7	0	0	0	0	0	0	0	0	0	0
ADC #8	0	0	0	0	0	0	0	0	0	0
SUM	734	423	146	513	736	366	126	215	92	162

CALIBRATION FACTORS

CT/MIN PER 15 NANOCURIE PU @ 1000 PPM AM-241 = 6.44  
 CT/MIN PER NANOCURIE AM-241 = 8.283  
 PPM TODAY AM-241 = 4339 PPM

ACTIVITY CALCULATED FOR THIS COUNT  
 NANOCURIES  
 PU-239 = 5.08 +- 0.37  
 AM-241 = 1.071 +- 0.077

DID EMPLOYEE SHOWER BEFORE COUNT? YES \_\_\_ NO

LUNG COUNTER TECHNICIAN: YQN

APPROVED BY: \_\_\_\_\_

Figure C-28. Internal Dosimetry – Lung Count Results 11-23-93.

**ATTACHMENT C**  
**EXAMPLES OF BIOASSAY DATA RECORDS AND REPORTS**  
 Page 30 of 32

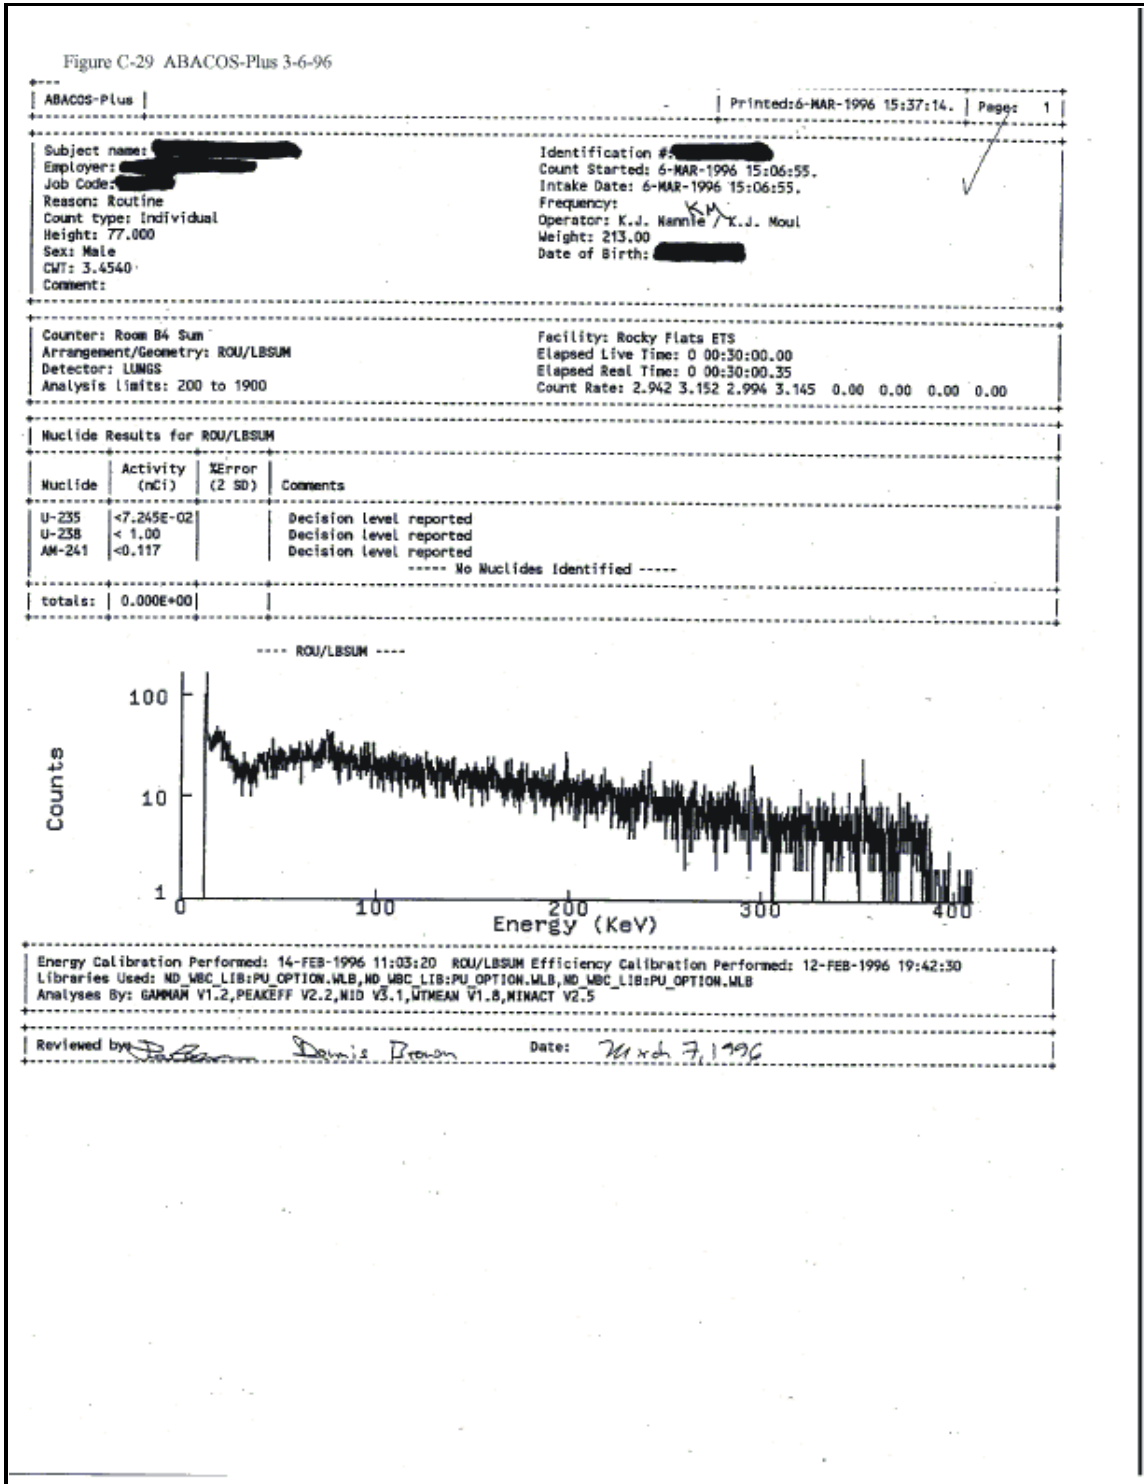


Figure C-29. ABACOS-Plus 3-6-96.

### ATTACHMENT C EXAMPLES OF BIOASSAY DATA RECORDS AND REPORTS Page 31 of 32

Figure C-30 ABACOS-Plus 11-15-01

---

ABACOS-PLUS Printed: 15-NOV-2001 08:31 Page: 1

---

ROCKY FLATS ENVIRONMENTAL TECHNOLOGY SITE IN-VIVO COUNTER

SENSITIVE - UNCLASSIFIED INFORMATION

---

Subject name: ██████████ Employer: ██████████ Job Code: ██████████ Sex: Male Height: 68.000 CMT: 3.6251 Reason: OTHER Comment: MED RECALL	Identification #: ██████████ Count Started: 15-NOV-2001 08:00:11 Intake Date: 15-NOV-2001 08:00:11 Date of Birth: ██████████ Weight: 194.00
--	---

---

Operator: KJN Initials: *KJN*

---

Counter: Room A Lung Analysis Limits (channels): 100 to 2000 Detector Count Rate (gross cps): 3.778 3.548 3.580 3.359 Analysis Energies (keV) Am-241: 59.54 U-235: 143, 185, and 204 U-238: 43 and 93	Arrangement/Geometry: ROU/LASUM Elapsed Live Time: 0 00:30:00.00
--	---

---

MDA values are for an average RFETS worker. Results for an individual count may be greater than the stated MDA.

---

Nuclide Results for ROU/LASUM

Nuclide	Activity (nCi)	DL (nCi)	MDA (nCi)	%Error (1SD)	> DL	> MDA	Comments
U-235	-3.915E-02	0.654	0.790	-78.7			
U-238	-1.38	2.12	2.10	-81.0			
AM-241	-0.119	0.230	0.290	-98.5			
----- No Nuclides Identified -----							
Totals:	-1.53						

---

Flags: "\*" = nuclide identified.

----, ROU/LASUM ----

Counts

Energy (KeV)

---

Energy Calibration Performed: 1-OCT-2001 08:17:16. ROU/LASUM Efficiency Calibration Performed: 9-AUG-2001 13:10:09.  
 Libraries used: ND\_WBC\_LIB:PU\_OPTION\_A.WLB, ND\_WBC\_LIB:PU\_OPTION\_A.WLB, ND\_WBC\_LIB:PU\_OPTION\_A.WLB  
 Analyses By: PEAK V16.9, PEAKEFF V2.2, MID V3.3, WTHEAN V1.8, MINACT V2.8

---

Reviewed by: *Shel Daman* Date: 11-15-01

Figure C-30. ABACOS-Plus 11-15-01.

## ATTACHMENT C EXAMPLES OF BIOASSAY DATA RECORDS AND REPORTS

Page 32 of 32

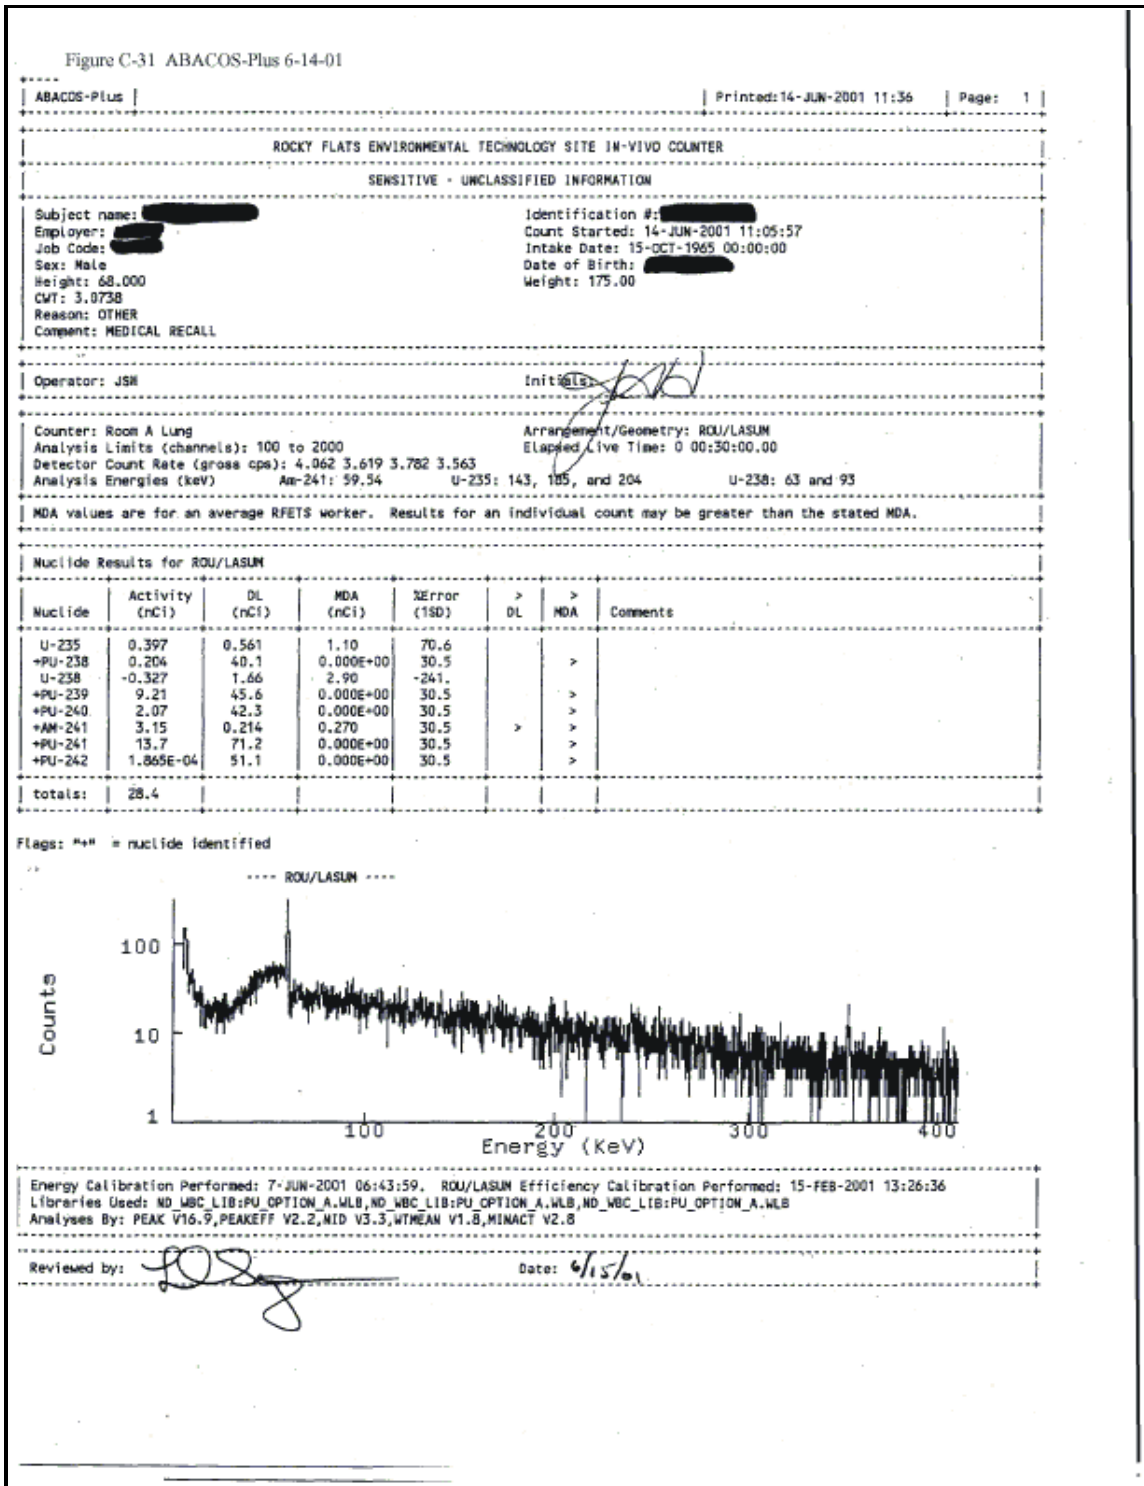


Figure C-31. ABACOS-Plus 6-14-01.