

Report of Investigations 96XX

Recent Coal Dust Particle Size Surveys and the Implications for Mine Explosions

Kenneth L. Cashdollar, Michael J. Sapko, Eric S. Weiss, Marcia L. Harris, Chi-Keung Man, Samuel P. Harteis, and Gregory M. Green

DEPARTMENT OF HEALTH AND HUMAN SERVICES
Centers for Disease Control and Prevention
National Institute for Occupational Safety and Health
Pittsburgh Research Laboratory
Pittsburgh, PA

October 2009

This document is in the public domain and may be freely copied or reprinted.

Disclaimer

Mention of any company or product does not constitute endorsement by either the National Institute for Occupational Safety and Health (NIOSH) or the Mine Safety and Health Administration (MSHA). In addition, citations to Web sites external to NIOSH do not constitute NIOSH endorsement of the sponsoring organizations or their programs or products. Furthermore, NIOSH is not responsible for the content of these Web sites.

Ordering Information

To receive documents or other information about occupational safety and health topics, contact NIOSH at

Telephone: **1-800-CDC-INFO** (1-800-232-4636)

TTY: 1-888-232-6348

e-mail: cdcinfo@cdc.gov

or visit the NIOSH Web site at www.cdc.gov/niosh.

For a monthly update on news at NIOSH, subscribe to NIOSH *eNews* by visiting www.cdc.gov/niosh/eNews.

DHHS (NIOSH) Publication No. 2008-XXX

October 2009

SAFER • HEALTHIER • PEOPLE™

CONTENTS

	<i>Page</i>
Executive summary.....	i
Abstract.....	3
Introduction.....	3
Experimental procedures	7
Size data for intake airways.....	12
Size data for return airways	16
MSHA dust survey results from intake and return airways.....	16
Limestone rock dust inerting	18
Recommendation and summary.....	19
Acknowledgments.....	20
References.....	21
Appendix A. –Size analyses of coal dust from mine intake airways.....	26
Appendix B. –Size analyses of coal dust from mine return airways	37
Appendix C. –Discussion of the coal dust and rock dust properties and experiments	40
Limestone rock dust inerting discussion	41
Effect of particle size on coal explosibility	46

ILLUSTRATIONS

1. Effect of particle size of coal dust on the explosibility of Pittsburgh seam bituminous coal. Adapted from Rice et al. [1922] and Rice and Greenwald [1929].	5
2. MSHA Coal Mine Safety and Health Districts, identified by number.	6
3. Original coal sieve size analyses and sieve size analyses of acid-leached mixture of 30% medium-size Pittsburgh coal and 70% limestone rock dust.....	9
4. Original coal sieve size analyses and sieve size analyses of acid-leached mixture of 30% medium-size Pittsburgh coal, 60% limestone rock dust, and 10% kaolin clay.	9
5. Plan view of the Lake Lynn Experimental Mine (LLEM)	10
6. Side view of A- and D-drift test zones in the LLEM for determining rock dust inerting requirements	11
7. Coal particle size by MSHA District	14
8. Coal particle size by coal seam	16
9. Dust survey results from intake and return airways.....	17
10. Effect of particle size of coal dust on the explosibility of Pittsburgh seam bituminous coal..	18
C-1. –Effect of particle size of coal dust on the explosibility of Pittsburgh seam bituminous coal.	46

TABLES

1. Average coal sizes from intake airways in mines in ten MSHA Safety and Health Districts ..	13
2. Average coal particle size from intake airways for various coal seams	15
A-1. –Size analyses of coal dust from intake airways in six MSHA District 2 mines	27
A-2. –Size analyses of coal dust from intake airways in seven MSHA District 3 mines.....	28
A-3. –Size analyses of coal dust from intake airways in seven MSHA District 4 mines.....	29

A-4. –Size analyses of coal dust from intake airways in six MSHA District 5 mines	30
A-5. –Size analyses of coal dust from intake airways in five MSHA District 6 mines.....	31
A-6. –Size analyses of coal dust from intake airways in five MSHA District 7 mines.....	32
A-7. –Size analyses of coal dust from intake airways in six MSHA District 8 mines	33
A-8. –Size analyses of coal dust from intake airways in seven MSHA District 9 mines.....	34
A-9. –Size analyses of coal dust from intake airways in five MSHA District 10 mines.....	35
A-10. –Size analyses of coal dust from intake airways in seven MSHA District 11 mines.....	36
B-1. –Size analyses of coal dust from mine return airways in 36 mines	38
B-2. Size analyses of coal dust from return airways for seven Pittsburgh seam coal mines	39
C-1. Pittsburgh and Sunnyside seam coal dust sizes	43
C-2. Limestone rock dust sizes	43
C-3. Average proximate and ultimate analyses of coal used in LLEM experiments	44
C-4. LLEM inerting tests for Pittsburgh seam coal dust and limestone rock dust	45
C-5. LLEM inerting tests for Sunnyside seam coal dust and limestone rock dust.....	46

ACRONYMS AND ABBREVIATIONS USED IN THIS REPORT

ASTM	American Society for Testing and Materials
%TIC	percent total incombustible content
BEM	Bruceton Experimental Mine
CFR	Code of Federal Regulations
CH ₄	methane
DG	data-gathering
D _{med}	mass median diameter
D _s	surface mean diameter
D _w	mass or volume mean diameter
IC	information circular
hvb	high volatile bituminous
hvCb	high volatile C bituminous
LLEM	Lake Lynn Experimental Mine
LLL	Lake Lynn Laboratory
lvb	low volatile bituminous
LTA	low temperature ashing
M	marginal propagation
MSHA	Mine Safety and Health Administration
mvb	medium volatile bituminous
NIOSH	National Institute for Occupational Safety and Health
NP	non-propagation
P	propagation
PC	personal computer
PRL	Pittsburgh Research Laboratory (NIOSH)

UNIT OF MEASURE ABBREVIATIONS USED IN THIS REPORT

Btu/lb	British thermal unit per pound
cm	centimeter
ft	foot
ft ²	square foot
g/m ³	gram per cubic meter
hr	hour
kPa	kilopascal
m	meter
m ²	square meter
ms	millisecond
mt/yr	million ton per year
%	percent
psi	pound-force per square inch
sec	second
μm	micrometer
°C	degree Celsius

DEDICATION

This report was initially prepared by Kenneth L. Cashdollar and is dedicated to his memory. Ken passed away on March 4, 2009. Ken never wavered from his continuing commitment to conduct the highest quality, solution-oriented, scientific research focused on reducing the risk of explosions fatalities in the mining and chemical industries.



EXECUTIVE SUMMARY

Spreading rock dust in bituminous coal mines is the primary means of reducing the explosion potential of coal dust that collects during the normal workings of an active coal mine.

Accordingly, guidelines have been established by the Mine Safety and Health Administration (MSHA) about the relative proportion of rock dust that needs to be present in both intake and return airways. Specifically, current MSHA regulations require that intake airways contain at least 65% incombustible content and return airways contain at least 80%. The higher limit for return airways was set in large part because fine “float” coal dust (100% < 200 mesh or 75 μm) tends to collect in these airways. MSHA inspectors routinely monitor rock dust inerting efforts by collecting dust samples and measuring the percentage of total incombustible content (TIC). These regulations were based on two important findings: a survey of coal dust particle size that was performed in the 1920s and large-scale explosion tests conducted in the U.S. Bureau of Mines’ Bruceton Experimental Mine (BEM) using dust particles of that size range to determine the amount of inerting material required to prevent explosion propagation.

Mining technology and practices have changed considerably since the 1920s when the original coal dust particle survey was performed. Also, it has been shown conclusively that as the average size of coal dust particles decreases, the explosion hazard increases. Given these factors, the National Institute for Occupational Safety and Health (NIOSH) and MSHA conducted a joint survey to determine the range of coal particle sizes found in dust samples collected from intake and return airways of U.S. coal mines. Results from this survey show that the coal dust found in mines today is much finer than in mines of the 1920s, presumably due to increased automation and a greater reliance on mining machinery.

In light of this recent comprehensive dust survey, NIOSH conducted additional large-scale explosion tests at the Lake Lynn Experimental Mine (LLEM) to determine the degree of rock dusting necessary to abate explosions using Pittsburgh seam coal dust blended as 38% < 200 mesh and referred to as medium-sized dust. This medium-sized blend was used to represent the average of the dust found in District 11, i.e., $37 \pm 10\%$ < 200 mesh. Explosion tests indicate that medium-sized coal dust required 76.4% TIC to prevent explosion propagation. Even the coarse coal dust (20% < 200 mesh or 75 μm) representative of samples obtained from mines in the 1920s required approximately 68% TIC to be rendered inert, a level higher than the current regulation of 65% TIC. In return airways, the particle size survey revealed that the average dust particle size is roughly the same as float coal dust as defined in the Coal Mine Health and Safety Act of 1969.

Given the results of the recent coal dust particle size survey and large-scale explosion tests, NIOSH recommends a new standard of 80% TIC be required in the intake airways of bituminous coal mines. The survey results indicate that the current requirement of 80% TIC in return airways is still sufficient and appropriate. In addition, NIOSH agrees with and endorses the earlier recommendation of Nagy [1981] that new rock dusting standards should be based on a worst-case scenario (using high volatile coals) with no relaxation for lower volatile coals.

Recent Coal Dust Particle Size Surveys and the Implications for Mine Explosions

Kenneth L. Cashdollar¹, Michael J. Sapko², Eric S. Weiss³, Marcia L. Harris⁴,
Chi-Keung Man⁵, Samuel P. Harteis⁶, and Gregory M. Green⁷

ABSTRACT

The National Institute for Occupational Safety and Health (NIOSH) and the Mine Safety and Health Administration (MSHA) conducted a joint survey to determine the range of coal particle sizes found in dust samples collected from intake and return airways of U.S. coal mines. The last comprehensive survey of this type was performed in the 1920s. The recent dust samples were collected by MSHA inspectors from mines in each of the ten MSHA bituminous Coal Mine Safety and Health Districts. Samples were collected in intake airways and return airways at each mine. The results indicate that particle sizes of mine coal dust in intake airways are significantly finer than those measured in the 1920s.

Since the explosion hazard increases as the coal dust particle size decreases, a series of large-scale dust explosion tests were conducted at the NIOSH Lake Lynn Experimental Mine (LLEM) using the recently obtained dust survey results to determine the incombustible necessary to prevent explosion propagation. This finer size coal dust, as representative of the particle size found in intake airways of current U.S. underground coal mine operations, requires more incombustible matter to be effectively inerted than the 65% incombustible specified in current regulations. The results also indicate that the dust in return airways is no finer than historic values and that the current 80% incombustible requirement in these areas is still sufficient.

INTRODUCTION

Despite the worldwide research on coal mine safety, coal mine explosions involving fatalities and injuries still occur [Dobroski et al. 1996; McKinney et al. 2002; Gates et al. 2007; Light et al. 2007]. Experimental studies by the Pittsburgh Research Laboratory⁸ (PRL) and similar agencies in other countries have shown that mixing a sufficient quantity of inert rock dust

¹ Research Physical Scientist (deceased), Pittsburgh Research Laboratory, National Institute for Occupational Safety and Health, Pittsburgh, PA.

² Senior Research Physical Scientist (retired), Pittsburgh Research Laboratory, National Institute for Occupational Safety and Health, Pittsburgh, PA.

³ Team Leader (Senior Research Mining Engineer), Lake Lynn Laboratory Section, Pittsburgh Research Laboratory, National Institute for Occupational Safety and Health, Pittsburgh, PA.

⁴ Research Chemical Engineer, Pittsburgh Research Laboratory, National Institute for Occupational Safety and Health, Pittsburgh, PA.

⁵ Senior Service Fellow, Pittsburgh Research Laboratory, National Institute for Occupational Safety and Health, Pittsburgh, PA.

⁶ Research Mining Engineer, Pittsburgh Research Laboratory, National Institute for Occupational Safety and Health, Pittsburgh, PA.

⁷ Physical Science Technician, Pittsburgh Research Laboratory, National Institute for Occupational Safety and Health, Pittsburgh, PA.

⁸The Pittsburgh Research Laboratory was part of the U.S. Bureau of Mines until 1996, when it was transferred to the National Institute for Occupational Safety and Health (NIOSH).

with coal dust will prevent coal dust explosions by acting as a heat sink [Cybulski 1975; Michelis et al. 1987, 1996; Reed et al. 1989; Lebecki 1991]. The U.S. mining law pertaining to rock dusting for the prevention of coal dust explosions is specified in the Federal Coal Mine Health and Safety Act of 1969 and subsequently amended in the Federal Mine Safety and Health Act of 1977 [U.S. Congress 1969 and 1977]. The specific requirements are published in Title 30, Part 75, Section 75.403 of the U.S. Code of Federal Regulations (CFR) [30 CFR⁹ 2008]. Current regulations state that U.S. bituminous coal mines must maintain an incombustible content of at least 65% in the non-return (intake) airways and at least 80% in the return airways. Return airways require more inert material because there is greater risk of accumulation of finer float coal dust. The U.S. regulations also require an additional 1.0% incombustible by weight for each 0.1% methane in the ventilating air in intakes and 0.4% additional incombustible for each 0.1% methane in returns.

The 65% total incombustible content (TIC) required for intake airways was adopted based on the results of two studies. First, coal dust samples were collected and measured to determine the average size of coal dust particles. Next, full-scale experimental mine tests were conducted to determine the amount of rock dust required to inert coal particles of the size collected in the survey [Nagy 1981]. The term “mine size coal” was adopted in the mid-1920s and refers to coal dust that passes through a U.S. Standard 20-mesh sieve (850 μm) and contains 20% minus 200 mesh (75 μm). The justification for adopting this definition is given in Bureau of Mines Technical Paper 464 [Rice and Greenwald 1929]. Briefly, Technical Paper 464 indicates that coal dust samples collected from the mine floors had 5% to 40% of the material less than 200 mesh and that the values were weighted. For 80% of mines, the final values ranged from 15% to 25% through 200 mesh. Therefore, coal dust having 20% through 200 mesh was considered to be typical “mine size dust.” The authors of Technical Paper 464 acknowledge that dust collected from ribs, roof, and timbers was finer in size, with 40% to 75% finer than 200 mesh, though they do not list the distribution of dust that would pass through sieves other than 200 mesh. Also missing from the report are details on the total number of mines surveyed and the total number of samples analyzed for coal particle size. Many years later Public Law 552 (82nd Congress, 1952) required 65% incombustible for most mines but did not differentiate between intake and return areas.

The quantities of rock dust required in bituminous coal mines in the United States were increased by enactment of Public Law 91-173, the Federal Coal Mine Health and Safety Act of 1969. In Section 304(a), it is mandated that coal dust shall be cleaned up and not permitted to accumulate in active workings or electrical equipment. In paragraph (b), it is noted that when excessive dust is raised, water, water plus a wetting agent, or other no less effective agent shall be applied to abate dust, especially in distances less than 40 feet from the face to minimize explosion hazards. In paragraph (c), it is required that all underground areas where the incombustible content is too low shall be rock dusted to within 40 feet of the face. All crosscuts that are less than 40 feet from a working face shall also be rock dusted. Section 304(d) reads as follows:

“Where rock dust is required to be applied, it shall be distributed upon the top, floor, and sides of all underground areas of a coal mine and maintained in such quantities that the incombustible content of the combined coal dust, rock dust, and other dust shall be not less than 65 per centum, but the incombustible content in the return air courses shall be no less than 80 per centum. Where methane is

⁹ *Code of Federal Regulations*. See CFR in references.

present in any ventilating current, the per centum of incombustible of such combined dusts shall be increased 1.0 and 0.4 per centum for each 0.1 per centum of methane, where 65 and 80 per centum respectively, of incombustibles are required.”

The aforementioned requirement of 80% TIC in return air represents an increase over previous standards for return airways. The entire standard was based on earlier research with “mine-size dust.” The incombustible content needed to prevent propagation given a particular coal dust size is also dependent, to a lesser extent, on the volatility content of the coal. The decision to require all coal dusts except anthracite to have 65% TIC was made in 1927 by the Mine Safety Board. Decision No. 5 relating to rock-dusting [Rice, 1927] and was superseded and clarified by Decision No. 32 [Bu Mines IC 6946, 1937]. All Federal mine codes and laws since 1937 have not permitted any relaxation of the requirement for low-volatile semibituminous coal. The 65% TIC for all coals (except anthracite) was made to simplify rock-dusting practices.

The effect of coal particle size on explosibility is illustrated in Figure 1 [Rice et al. 1922; Rice and Greenwald 1929]. This figure shows the amount of incombustible required to prevent propagation of an explosion for Pittsburgh high volatile bituminous coal dust with 10% to 80% passing through a 200 mesh (75 µm) sieve. Each of the data points is an individual explosion test conducted in the NIOSH-PRL Bruceton Experimental Mine (BEM). The curve is the boundary between mixtures that can propagate an explosion (below line) and mixtures that cannot propagate an explosion (above line). These data were used to support the 65% incombustible requirement for intake and return airways based on “mine sized dust” of the time.

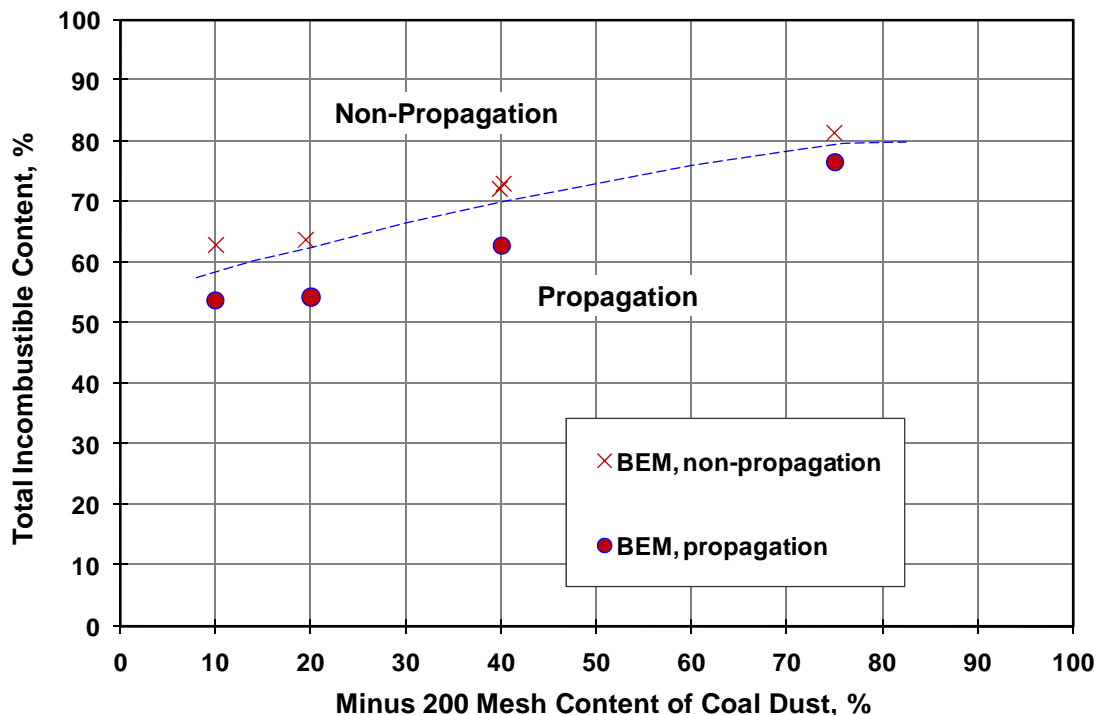


Figure 1. Effect of particle size of coal dust on the explosibility of Pittsburgh seam bituminous coal. Adapted from Rice et al. [1922] and Rice and Greenwald [1929].

From 1985 through 2001, numerous coal dust explosion tests were conducted in the single entry D-drift at LLEM to determine the concentration of rock dust required to prevent explosion propagation of samples with varying coal dust particle sizes, volatilities, and other related properties. The LLEM drifts (20-ft or 6-m wide by 6.5-ft or 2-m high) are more representative of current U.S. underground coal mine geometries compared to the much smaller BEM entries (9-ft or 2.7-m wide by 6-ft or 1.8-m high).

Much knowledge has been obtained from experimental mine and laboratory dust explosion research during the past three decades. Investigators have examined the effects of rock dust inerting requirements, the minimum explosible coal dust concentrations, and the effects of volatile matter on the explosibility of dusts [Sapko et al. 1987a,b; 1989; 1998; 2000; Sapko and Verakis 2006; Cashdollar 1996; Cashdollar and Hertzberg 1989; Cashdollar and Chatrathi 1993; Cashdollar et al. 1987; 1988; 1992a,b,c; 2007]. Further research evaluated the effects of pulverized versus coarse coal particle size [Weiss et al. 1989], coal volatility, extinguishment, and pyrolysis mechanisms [Hertzberg et al. 1987; 1988a, b; Conti et al. 1991; Greninger et al. 1991]. The clear cumulative consensus of these studies is that dust particle size emerges as the single most influential factor controlling coal dust explosion propagation.

To determine compliance with current regulations, inspectors from the MSHA periodically collect samples of deposited dust from various areas in a mine. The MSHA laboratory determines TIC and compares it with the 65% TIC requirement. This TIC requirement is based on a mean coal particle size of 20% minus 200 mesh and assumed to be constant throughout the intake entries. Presently the size of the coal dust component is not measured by MSHA laboratories as part of the explosibility assessment.

This report presents the results of a recent coal dust particle size survey found in dust samples collected from intake airways in 61 U.S. coal mines representing 10 of the 11 MSHA bituminous Coal Mine Safety and Health Districts (Figure 2). MSHA District 1 covers anthracite mines in Pennsylvania, which do not require rock dusting. A preliminary version of this research with data from 50 mines was published by Sapko et al. [2007]. Samples from return airways in 36 mines were also size analyzed. Following the mine dust size survey, a series of large-scale dust explosion tests were conducted at the LLEM using average coal particle results to determine the incombustible necessary to prevent explosion propagation.

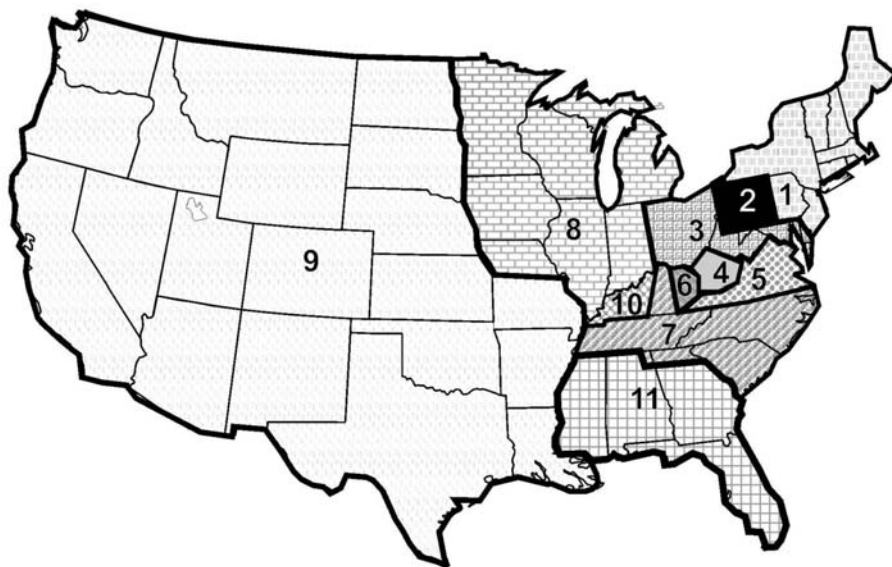


Figure 2. MSHA Coal Mine Safety and Health Districts, identified by number.

EXPERIMENTAL PROCEDURES

To assess current variations in coal particle size from various underground coal mining operations, MSHA coordinated the acquisition of mine dust samples from the ten bituminous Coal Mine Safety and Health Districts. The dust samples were among those routinely collected by mine inspectors to assess compliance with 30 CFR 75.403. The detailed sampling protocols are summarized in the General Coal Mine Inspection Procedures and Inspection Tracking System [MSHA 2008]. The samples were sent to the MSHA laboratory at Mt. Hope, WV, and analyzed for total incombustible content (TIC). The TIC includes measurements of the moisture in the samples, the ash in the coal, and the rock dust. The incombustible analysis procedure [Montgomery, 2005] begins by passing the sample through a 20-mesh sieve (850 μm) and then oven drying the minus 20-mesh material for 1 hr at 105 °C. The weight lost during drying constitutes the as-received-moisture in the sample. Next, the dried sample is heated in an oven that is ramped up over 1.5 hr and held at 515 °C for about 2.5 hr to burn off the combustible coal fraction, thereby leaving the ash and incombustible material. This low temperature ashing (LTA) burns off the coal but does not decompose the limestone rock dust. The amount of the remaining ash material plus the as-received-moisture divided by the initial weight is reported as %TIC. Portions of each dust sample that were not needed for TIC measurement were sent to NIOSH-PRL for the coal particle sizing analyses.

At PRL, the limestone (or marble) rock dust was leached from the sample using hydrochloric acid. In this laboratory leaching method, dilute hydrochloric acid was added to the dust sample in a beaker and heated on a hotplate. The acid reacted with the limestone or marble rock dust, producing foam while releasing carbon dioxide. Sufficient acid was added until all foaming stopped. The hotplate kept the slurry near its boiling point for about one hour. After the slurry cooled, the acid-insoluble residue was filtered from the acid. The solid residue was rinsed with water and isopropanol and then transferred to a large evaporating dish. The residue was dried at 110°C for 3 hr. Agglomerates were broken with a spatula. The residue consisted of coal plus other insoluble mineral matter (such as silica from the rock dust and shale from roof or floor rock in the mine).

The dried residue was then classified into the different size fractions using a sonic sieve, which combined two motions to provide particle separation: a vertical oscillating column of air and a repetitive mechanical pulse. Occasionally the tops of the sieves were brushed to break up any remaining agglomerates. The sieves are 8 cm in diameter and include the following sizes: 20 mesh (850 μm), 30 mesh (600 μm), 40 mesh (425 μm), 50 mesh (300 μm), 70 mesh (212 μm), 100 mesh (150 μm), 140 mesh (106 μm), 200 mesh (75 μm), 270 mesh (53 μm), and 400 mesh (38 μm). After the sieving was completed, the weight of sample on each sieve was recorded.

Since the residue from the leaching process contained other inert mineral matter (such as clay and silica dust) that did not react with the acid, a correction to the size analysis had to be made. First, the residue was grouped into three size fractions: minus 200 mesh, 200 by 70 mesh, and plus 70 mesh. These three fractions were heated at 515°C at PRL to determine the incombustible or non-coal content, using an LTA method similar to that of the MSHA laboratory at Mt. Hope. The sieve size analyses were then corrected for the non-coal content (insoluble mineral matter) in the three size groupings. The amount of this insoluble mineral matter in the samples varied greatly, but was generally in the 20% to 50% range. For most of the samples analyzed, the mineral matter was finer in size than the coal. Therefore, after correction for the

mineral matter, the corrected minus 200-mesh amount would be less than the original minus 200-mesh amount determined by sonic sieving alone. There was a wide range of correction values, but a value of 39% minus 200 mesh from the original sieving data might typically be reduced to ~31% minus 200 mesh after correcting for the mineral matter. Details of the size analyses are listed in the tables of Appendixes A and B, listing both original and corrected data.

The total size analysis procedure (acid leaching, sieving, and correction for remaining incombustible matter) was verified by using prepared mixtures of coal and rock dust. First, the size of the coal sample was determined by sieving. Next, samples of coal and rock dust were mixed together and the rock dust was leached from the mixture. The residue was then sieved and corrected via LTA for any remaining incombustible matter in the size fractions. Data for a mixture of 30% medium-size Pittsburgh seam high volatile coal and 70% limestone rock dust are shown in Figure 3. Both the cumulative and differential size distributions (by mass) are shown. A blue dashed vertical line shows the 200 mesh (75 μm) size and a dot-dashed vertical green line shows the 70 mesh (212 μm) size. Both the original coal (green data curves) and acid-leached residue from the mixture (light blue data curves) had their size analyses corrected via LTA for any remaining incombustible matter. For this mixture, both the percent through 200 mesh and the median size (50% point on the cumulative distribution curve) were almost identical for the original coal and the residue from the acid-leached mixture. Figure 4 shows similar data for a mixture of 30% medium size Pittsburgh seam coal, 60% limestone rock dust, and 10% kaolin clay (to simulate possible shale dust in the sample). The original coal data are shown by the green curves and the acid-leached residue data from the mixture are shown by the red curves. Figure 4 also shows close agreement for the percent through 200 mesh and almost identical median values from the two cumulative curves. Original and acid-leached Blue Creek seam and Pocahontas seam samples were compared but without any added rock dust. In general, the size analyses after leaching were within 1% to 3% of the amount of minus 200 mesh material (data not shown). Therefore, there is no evidence that the acid-leaching procedure compromises the accuracy of the sieve analysis of the coal dust.

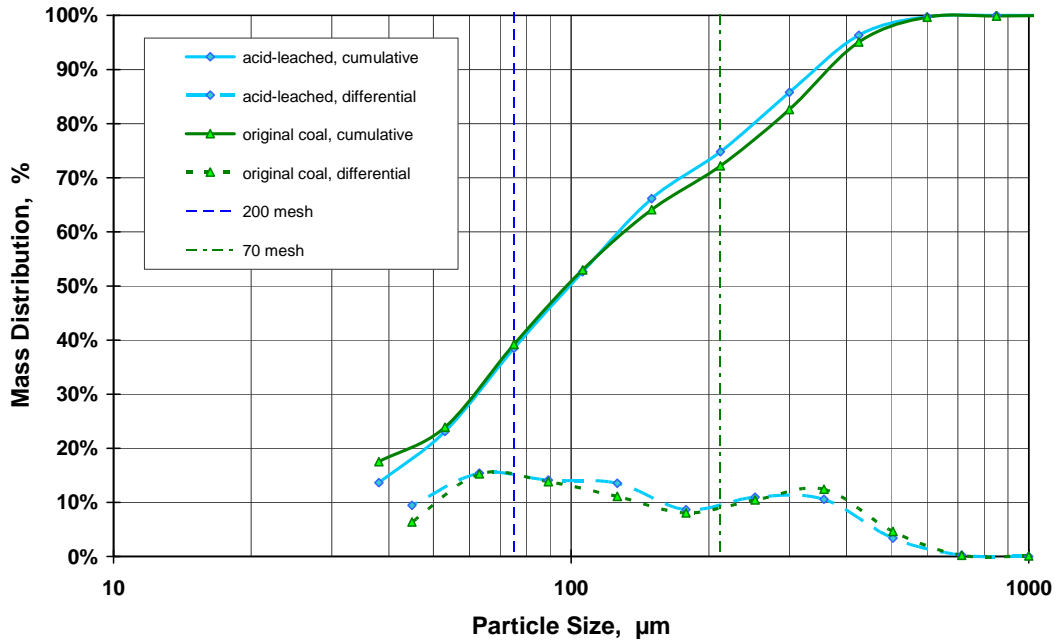


Figure 3. Original coal sieve size analyses and sieve size analyses of acid-leached mixture of 30% medium-size Pittsburgh coal and 70% limestone rock dust.

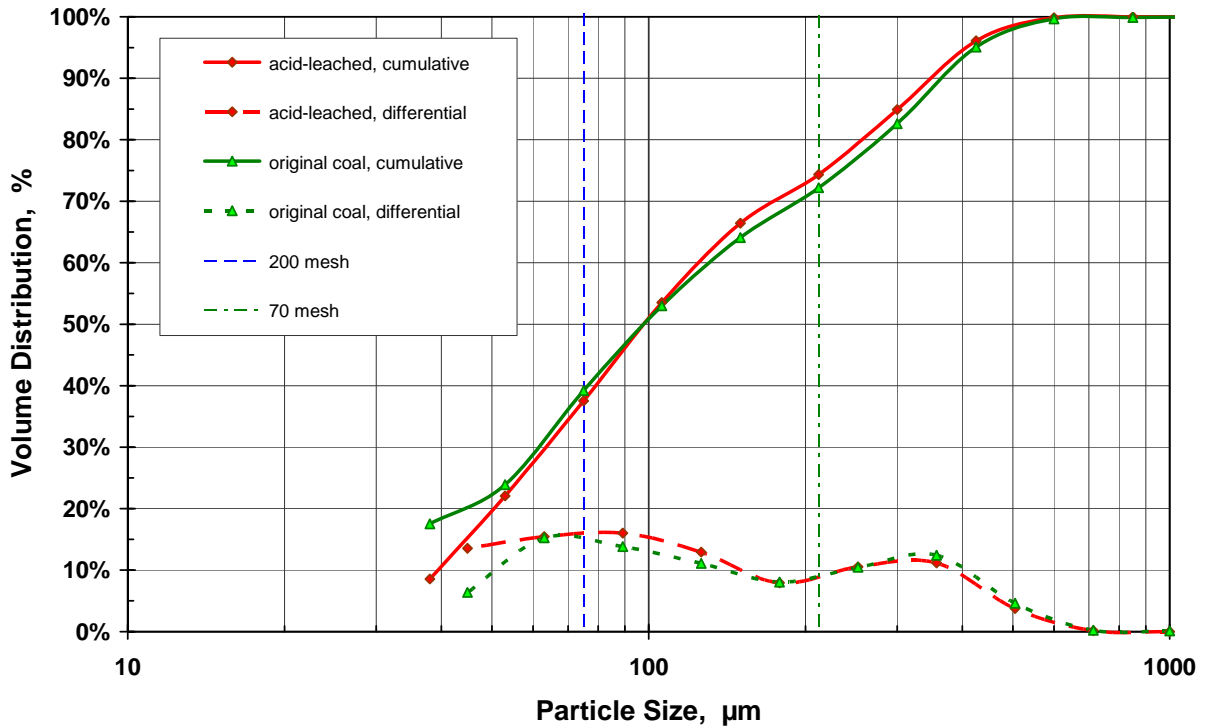


Figure 4. Original coal sieve size analyses and sieve size analyses of acid-leached mixture of 30% medium-size Pittsburgh coal, 60% limestone rock dust, and 10% kaolin clay.

The large-scale explosion tests were conducted in the LLEM, which is shown in the plan view of Figure 5 [Triebisch and Sapko 1990]. This is a former limestone mine, and five new drifts (horizontal passageways in a mine) were developed to simulate the geometries of modern U.S. coal mines. The mine has four parallel drifts - A, B, C, and D. D-drift is a 1,640-ft (500-m)

long single-entry that can be separated from E-drift by an explosion-resistant bulkhead door. In order to simulate room and pillar workings, drifts A, B, and C can be used. These three drifts are approximately 1,600-ft (490-m) long, with seven crosscuts at the inby end. Drifts C and D are connected by E-drift, a 500-ft (152-m) long entry which simulates a longwall face. Explosion tests can be conducted in the single entry D-drift, the multiple entry area of A-, B-, and C-drifts, or various other configurations including the longwall E-drift. The entries are about 20-ft (6-m) wide by about 6.5-ft (2-m) high, with cross-sectional areas of 130-140 ft² (12-13 m²). The LLEM bulkhead door and some of the other infrastructure were designed to withstand explosion overpressures of up to 100 psi (7 bar or 700 kPa). Higher pressures have been recorded at areas away from these structures. Previous publications described the LLEM coal dust explosion test procedures and the results of LLEM explosion research and post-explosion observations [Weiss et al. 1989; Greninger et al. 1991; Cashdollar et al. 1992b; Sapko et al. 1998; 2000].

Each LLEM drift has ten data-gathering (DG) stations inset in the rib, which houses a strain gauge transducer to measure the explosion pressure and an optical sensor to detect flame arrival. The wall pressure is perpendicular to the gas flow and is the pressure that is exerted in all directions. This quasi-static pressure is called the “static pressure” by Nagy [1981, p. 58] to differentiate it from the dynamic pressure, although the “static pressure” does vary with time during the explosion. The dynamic or wind pressure is directional. The total explosion pressure is the sum of the quasi-static pressure and the wind or dynamic pressure. Other instruments such as dynamic pressure sensors, heat flux gauges to measure explosion temperatures, optical probes to measure dust dispersion, and video cameras may be installed at various locations in the LLEM. During the explosion tests, a PC-based National Instruments data acquisition system collected the data from the various instruments at a sampling rate of 1,500 to 5,000 samples per sec.

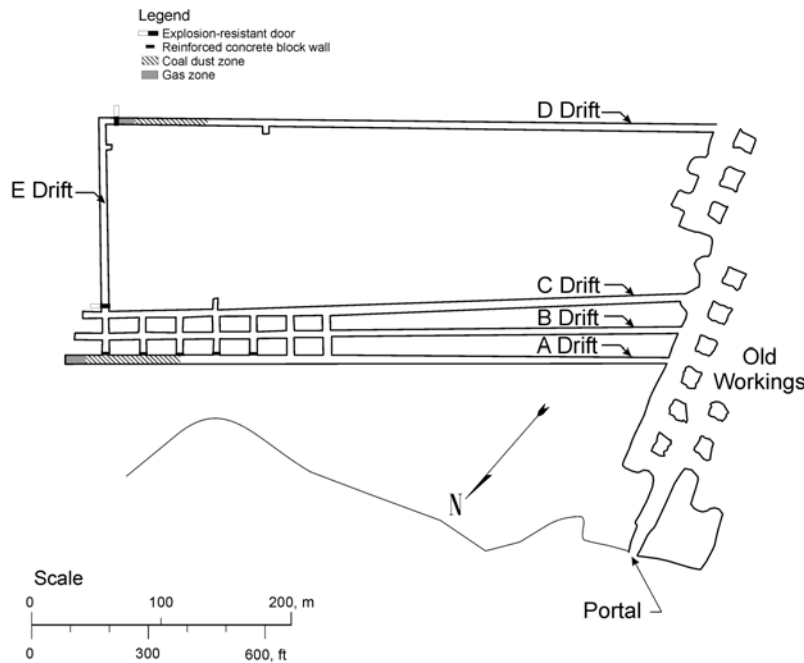


Figure 5. Plan view of the Lake Lynn Experimental Mine (LLEM).

The LLEM dust explosion tests, described in this paper, were conducted in D-drift and more recently in a modified single entry section of A-drift. These drifts were isolated from E-drift by means of the explosion-resistant movable bulkhead doors (Figure 5). The tested coal dusts were prepared in the NIOSH coal grinding and pulverizing facilities located at PRL. The coal and rock dust particle size data used in the LLEM explosion studies from the mid 1980s through 2008 are presented in Tables C-1 and C-2 in Appendix C of this report, and coal analysis is presented in Table C-3. The ignition zone for a typical D-drift dust explosion test (Figure 6) was a 40-ft (~12-m) long methane-air mixture at the face (closed end). This methane-air zone was ignited by electric matches. In the rock dust inerting tests, the coal dust and limestone rock dust mixture was placed half on roof shelves and half on the floor. These roof shelves were suspended 1.5 ft (0.5 m) from the mine roof on 10-ft (3-m) increments throughout the dust zone. This dust distribution technique, developed through extensive testing at BEM and LLEM, is used to enable reproducibility of experimental conditions. The length of the dust zones during these inerting tests in D-drift varied as follows: 210-, 270-, 390-, 420-, 460-, and 600-ft (64-, 82-, 119-, 128-, 140-, and 183-m) long. These dust zones started just outby the end of the 40-ft long ignition zone; i.e., the 210-ft long dust zone extended from 40 to 250 ft (~12 m to ~76 m) as measured from the face. Although the majority of the dust zones were 210-ft long, the longer dust zones were used for several different reasons depending on the experiment. The extension of flame travel through and beyond the longer dust zones for a particular incombustible content was always compared to a similar 210-ft long dust zone to verify that the flame propagation was not being overdriven by the methane ignition zone (which would typically travel ~200 ft from the closed end). The nominal dust loading reported for the LLEM tests assumes that all of the dust was dispersed uniformly throughout the cross-section. For the LLEM tests, the test drift was thoroughly washed down after each test. Dehumidified air was passed through the entry and allowed to dry several days before dust was loaded for the next test.

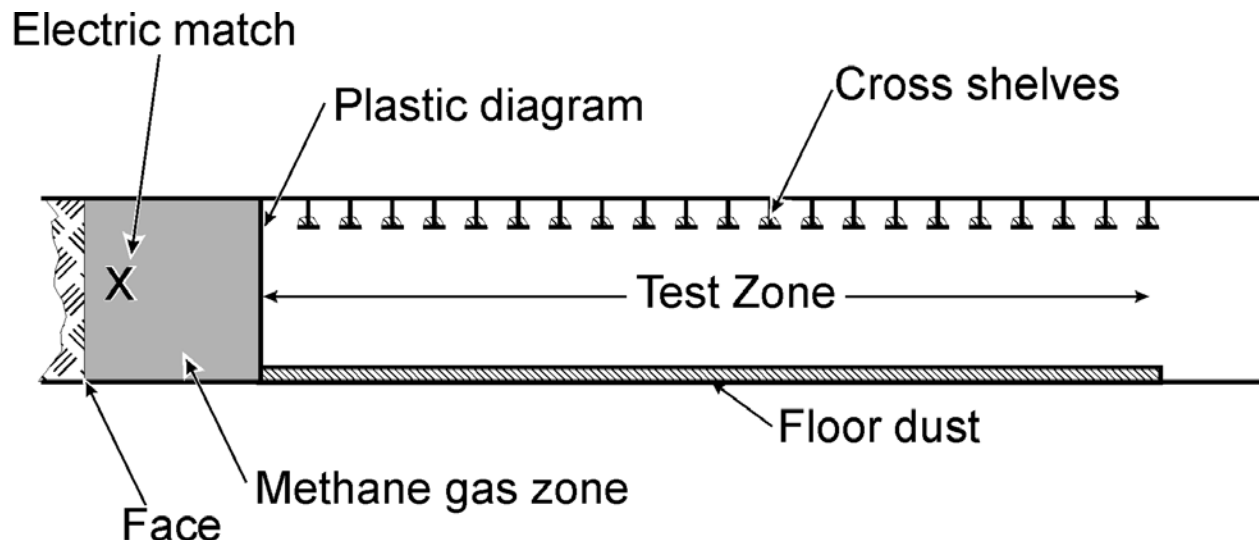


Figure 6. Side view of A- and D-drift test zones in the LLEM for determining rock dust inerting requirements.

SIZE DATA FOR INTAKE AIRWAYS

For this study, 217 samples of mine dust from intake airways of 61 coal mines in the ten MSHA bituminous districts were size analyzed. For each mine, samples were usually collected from two or more entries. For most analyses, multiple samples from a mine entry were combined to give an average size distribution for that entry. Most of the samples were band samples, but some were floor and rib samples, floor and roof samples, or floor-only samples. The detailed size data for each sample and each mine are listed in the tables of Appendix A. The mines are identified only as A, B, C, etc. so that the individual mines remain anonymous. Columns three and four of the tables in Appendix A list the percent incombustible (from the MSHA Mt. Hope Laboratory) and the percent soluble in acid, as measured at NIOSH-PRL. Columns five and six of the tables list the original size analyses. Column seven lists the weighted average of the ash or incombustible fraction of the acid-leached material. The remaining columns list the corrected size analyses. Table 1 lists the summary intake coal dust size data by the MSHA Coal Mine Safety and Health District. Column two lists the states within each MSHA District from which samples were obtained. There may be additional states within some Districts from which there were no samples obtained. Columns three and four of the table list the number of mines and total number of combined samples per District. Columns five through twelve list the average percent through the various sieves. The column for minus 200 mesh (75 μm) lists both the average value and the associated standard deviation. The standard deviations for the other sieve values are listed in the tables of Appendix A. The last column lists the average and standard deviation for the mass median particle diameter (50% point on the cumulative distribution curve), which was interpolated from the corrected sieving data. The cumulative size data for MSHA Districts 3, 9, and 11 are shown in Figure 7. MSHA District 11 has the finest size dust, with 37% minus 200 mesh, and the western states (District 9) have the coarsest dust, with 27% minus 200 mesh. District 3 (northern WV, OH, and MD) has an intermediate size. The averages for all MSHA Districts are 31% minus 200 mesh, 61% minus 70 mesh, and a mass median of $\sim 156 \mu\text{m}$. This is significantly finer than the size measured in the 1920s.

Table 1. Average coal sizes from intake airways in mines in ten MSHA Safety and Health Districts.

District	States	Mines	Samples	<53 μm or -270 mesh, %	<75 μm or -200 mesh, %	<106 μm or -140 mesh, %	<150 μm or -100 mesh, %	<212 μm or -70 mesh, %	<300 μm or -50 mesh, %	<425 μm or -40 mesh, %	<600 μm or -30 mesh, %	D_{med} , μm
2	PA	6	20	23	29 \pm 4	37	47	59	72	85	95	165 \pm 27
3	OH, MD, Northern WV	7	22	26	33 \pm 9	41	51	62	74	87	96	149 \pm 42
4	Southern WV	7	23	25	30 \pm 6	38	48	60	73	87	97	165 \pm 39
5	VA	6	20	25	31 \pm 8	40	50	62	74	86	96	157 \pm 36
6	Eastern KY	5	24	25	31 \pm 7	39	49	59	72	85	96	160 \pm 37
7	Central KY	5	19	29	34 \pm 10	43	53	62	74	86	95	140 \pm 48
8	IN, IL	6	18	24	29 \pm 5	37	47	57	71	85	96	170 \pm 31
9	CO, NM, UT	7	20	21	27 \pm 3	36	46	57	71	85	96	172 \pm 26
10	Western KY	5	28	23	29 \pm 4	39	50	61	74	86	96	152 \pm 24
11	AL	7	23	30	37 \pm 10	48	60	73	84	92	97	128 \pm 46
Average for ten Districts		61	217	25	31	40	50	61	74	86	96	156

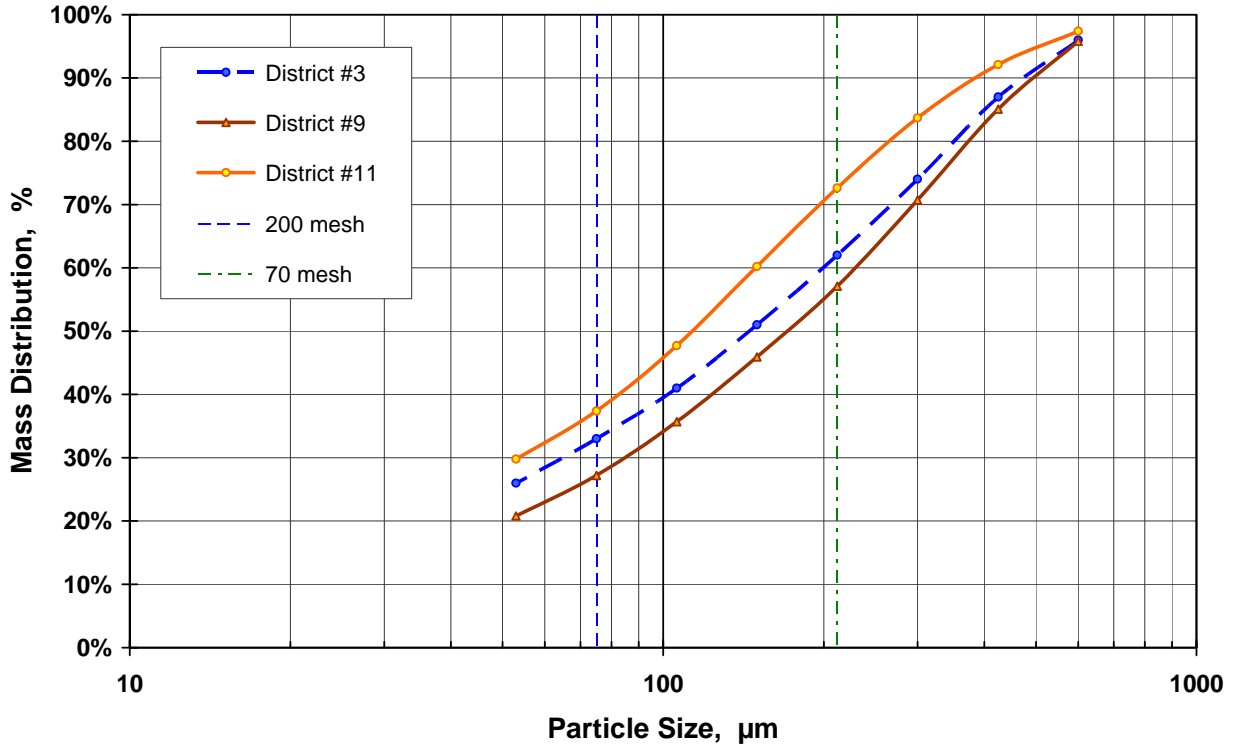


Figure 7. Coal particle size by MSHA district.

Table 2 lists the average coal dust particle sizes for intake airways for various coal seams or groups of adjacent coal seams. The eastern bituminous coal seams are those in the Appalachian Mountains from Pennsylvania to Alabama. Only the seams that included samples from two or more mines are listed. The coal rank is also listed in the first column, with hvb, mvb, and lvb indicating high, medium and low volatile bituminous coal, respectively [ASTM 2008]. The mid-eastern seams are those in Illinois, Indiana, and western Kentucky. These seams are known by different names in different states, as listed in the table. The western coal seams include various high volatile C bituminous (hvCb) coals in Colorado or Utah. The coal samples from the Hazard #4 seam in Kentucky and the Blue Creek seam in Alabama are the finest in size, with 40% less than 200 mesh. However, the Hazard seam data are based on samples from only two mines and may not represent the area as well as the Blue Creek seam data. The Pittsburgh seam coal in OH, PA, and WV has 32% minus 200 mesh. The cumulative size data for the Blue Creek, Pittsburgh, and Herrin coal seams are shown in Figure 8. The variations of particle size among the different coal seams may be related to the friability of the coal.

Table 2. Average coal particle size from intake airways for various coal seams.

Coal Seams	States	Mines	Samples	<53 μm or -270 mesh, %	<75 μm or -200 mesh, %	<106 μm or -140 mesh, %	<150 μm or -100 mesh, %	<212 μm or -70 mesh, %	<300 μm or -50 mesh, %	<425 μm or -40 mesh, %	D_{med} , μm
Eastern Bituminous Coal Seams											
Pittsburgh, hvb	PA,OH,WV	9	36	25	32 \pm 7	40	50	62	74	87	152 \pm 34
Upper or Lower Kittanning, hvb	PA,WV	3	6	20	27 \pm 7	34	43	54	67	82	187 \pm 42
Eagle, hvb	WV	2	5	20	25 \pm 7	33	44	56	70	85	187 \pm 44
Powellton, hvb	WV	2	7	24	28 \pm 5	36	45	56	69	84	180 \pm 36
Pocahontas #3 & #5, lvb	WV,VA	3	11	26	32 \pm 6	40	50	61	73	86	154 \pm 36
Raven, hvb	VA	2	6	27	35 \pm 10	45	57	70	80	89	138 \pm 44
Alma, Cedar Grove, Darby, Upper Elkhorn #1 or #3, hvb	KY	5	25	27	32 \pm 7	40	50	60	73	86	154 \pm 38
Hazard #4, hvb	KY	2	8	34	40 \pm 12	49	60	69	78	87	105 \pm 43
Pratt coal seam, hvb	AL	2	6	25	31 \pm 5	40	51	63	77	89	155 \pm 34
Blue Creek coal seam, mvb	AL	5	17	31	40 \pm 10	50	63	76	86	93	119 \pm 47
Mid-Eastern Bituminous Coal Seams											
Springfield, Illinois #5, or W. Kentucky #9	KY,IL,IN	5	20	24	30 \pm 5	39	50	61	74	87	155 \pm 29
Herrin, Illinois #6, or W. Kentucky #11	KY,IL	4	14	21	27 \pm 3	36	47	58	71	84	167 \pm 25
Western Bituminous Coal Seams											
various hvCb seams in Colorado	CO	4	9	21	27 \pm 3	36	46	57	70	84	174 \pm 29
various hvCb seams in Utah	UT	2	4	18	25 \pm 3	33	44	58	73	88	177 \pm 15

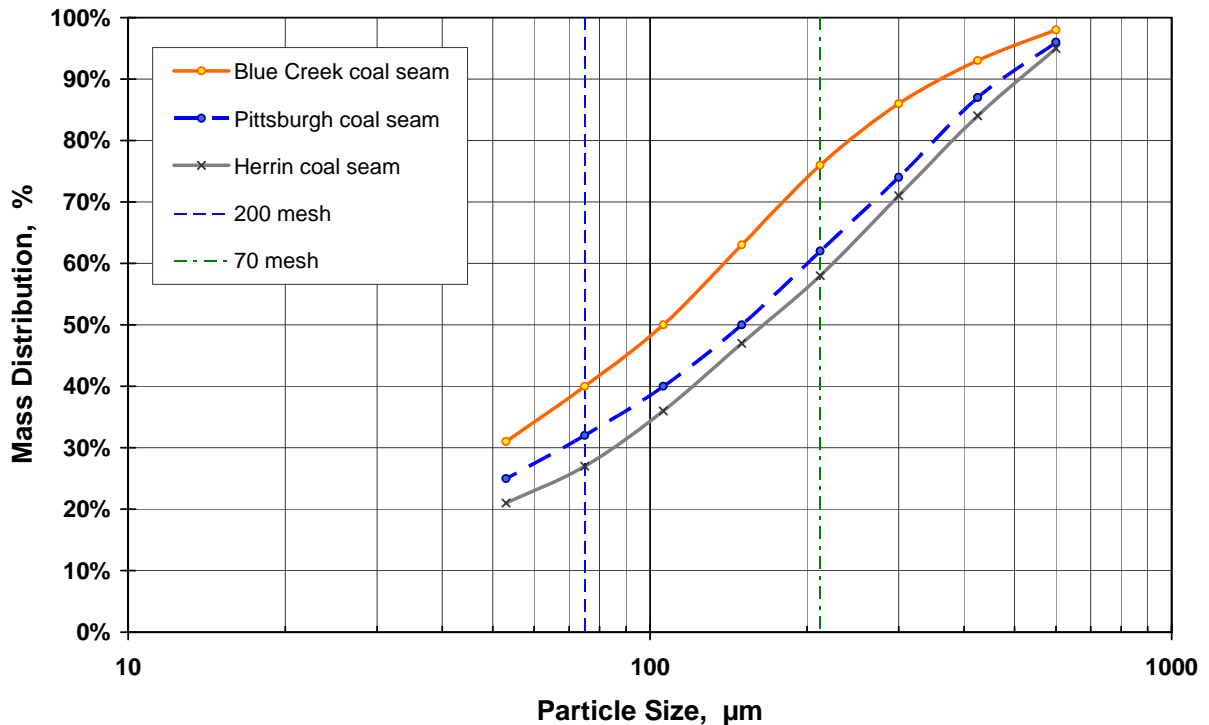


Figure 8. Coal particle size by coal seam.

SIZE DATA FOR RETURN AIRWAYS

For this study, 44 samples of mine dust from return airways of 36 coal mines in the ten MSHA bituminous Districts were size analyzed. Samples were collected from one or more entries in each mine. Similar to the intake airways, multiple samples from a mine entry were combined to give an average size distribution for that entry. Most of the samples were band samples, but some were floor and rib samples, floor and roof samples, or floor-only samples. The detailed size data for the return airways are listed in Table B-1 in Appendix B. For the returns, there was a much larger variation in the coal dust size. Many samples had percentages of minus 200 mesh dust that were similar to those of the intake samples. However, eight of the 44 samples had 60% to over 80% minus 200 mesh. The only coal seam for which there were sufficient samples to calculate a representative average size was the Pittsburgh coal seam. The coal samples had an average of 62% minus 200 mesh (Table B-2 in Appendix B), significantly finer than the intake coal samples from the Pittsburgh seam.

MSHA DUST SURVEY RESULTS FROM INTAKE AND RETURN AIRWAYS

MSHA has collected and determined the TIC for 65,536 intake and 60,663 return airway samples from underground coal mines from January 2005 to February 2008. Each dust sample represents about 500 ft (152 m) of mine entry. The overall TIC distributions for the intake and return samples are summarized in Figure 9. The intake airways are currently required to contain

at least 65% TIC. Approximately 87.3% contained $\geq 65\%$ TIC while 12.7% contained $< 65\%$ TIC and thus were non-compliant. The fact that 12.7% of the samples collected were found to be non-compliant illustrates the scope of the problem. Considering that each sample may represent up to 500 ft (152 m) of mine entry, these 12.7% or 8,323 samples represent over 788 miles (1,268 km) of underground coal mine entries that were deficient. At the other extreme, 66% of the intake samples contained over 80% TIC and 54.4% contained over 85% TIC. This indicates that rock dusting efforts exceed requirements in a majority of samples since the average TIC among all samples was 82.4% TIC.

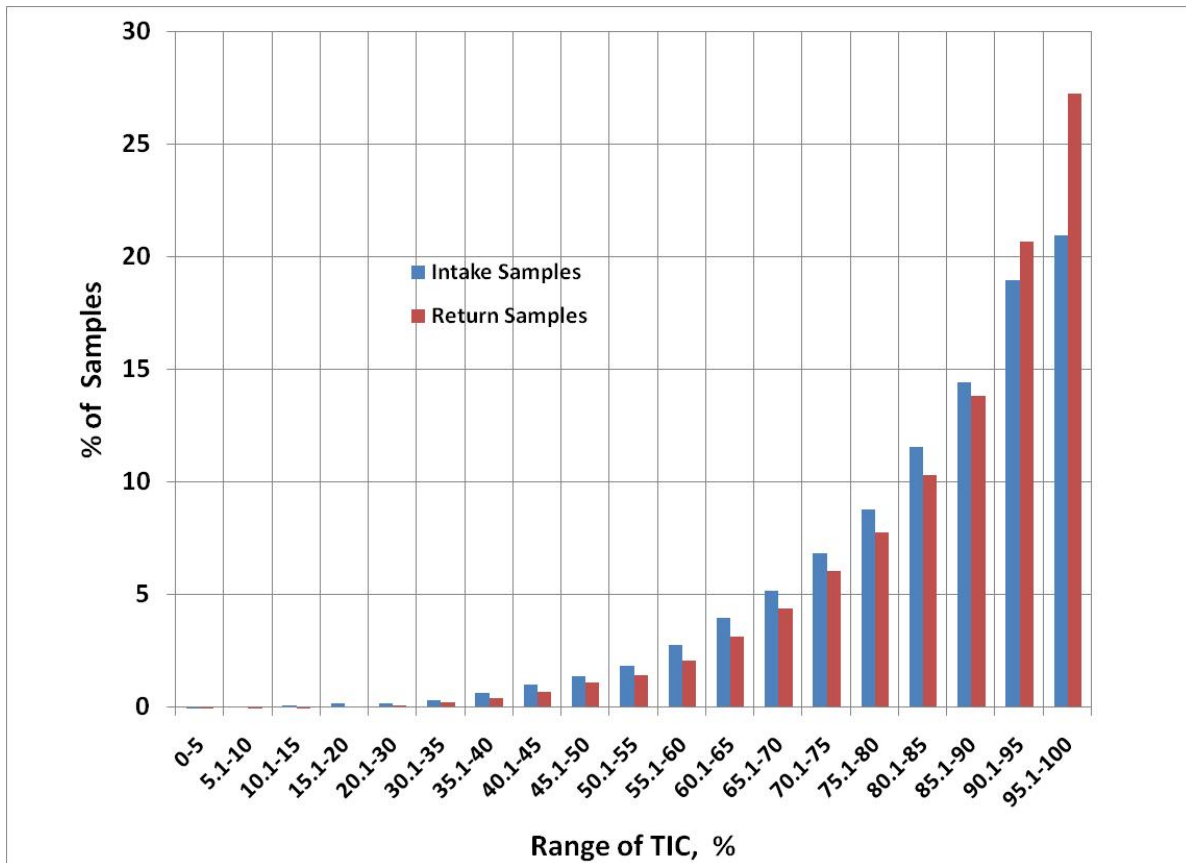


Figure 9. Dust survey results from intake and return airways.

A similar TIC distribution is observed for return airway samples. Current MSHA regulations require 80% TIC for return airways. Analysis of 60,663 samples revealed that 72.2% of samples contained $\geq 80\%$ TIC while 27.8% contained $< 80\%$ TIC. The average TIC for return samples was 85% which is $\sim 3\%$ higher than the intake average of 82.4%. The MSHA dust survey data indicate that many areas have more than sufficient inert material. However, there are still a significant number of areas where rock dusting efforts are insufficient to prevent coal dust explosions.

It is understandable that underground personnel, in an attempt to meet minimum rock dusting requirements, would rather exceed established minimums. Also, without the aid of a rapid means of determining explosibility, the problem of deficient or excessive rock dusting will likely persist. To help address this problem, NIOSH has developed a Coal Dust Explosibility

Meter (CDEM) [Sapko and Verakis 2006; Harris et al. 2008]. The CDEM is a handheld instrument that provides a real time assessment of the potential explosibility of a coal and rock dust mixture. It could serve as a useful instrument for the mine operator, not only to rapidly identify areas deficient in rock dust, but also to help manage the day-to-day distribution of rock dust.

LIMESTONE ROCK DUST INERTING

Prior to having recent access to the MSHA band samples collected from underground coal mines throughout the country, there was growing evidence from limited dust surveys that the coal dust particle size had been decreasing since the promulgation of the existing rock dusting regulations. This decrease occurred as new mining technologies were adopted by the industry-- i.e., mining methods involving the increased use of continuous mining machines. Numerous coal dust explosion tests have been conducted in the LLEM to specifically quantify the concentration of rock dust required to prevent propagation of a high volatile coal as a function of coal dust particle size. Shown in Figure 10 is a composite of these experiments. Details of these experiments can be found in Tables C-4 and C-5 in Appendix C along with a discussion highlighting the specific experimental results.

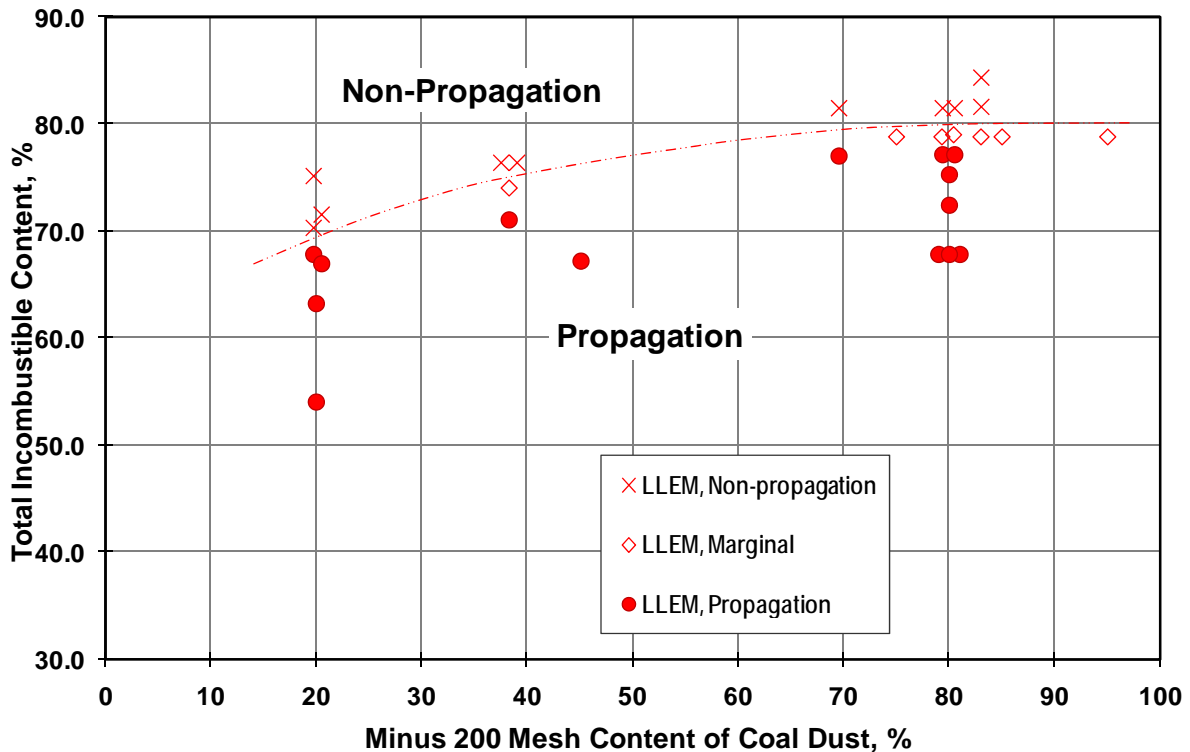


Figure 10. Effect of particle size of coal dust on the explosibility of Pittsburgh seam bituminous coal.

Following the coal dust survey, additional large-scale explosion experiments were conducted using a medium-size dust (38% < 200 mesh or 75 microns - Table C-1) to better define the boundary between explosion propagation and non-propagation. Medium-size dust was formulated with Pittsburgh seam coal to represent the average of the finer dusts collected from District 11 (37±10 % < 200 mesh). However, approximately 12% of the collected intake airway dust samples (26 of the 217 samples) ranged in size from 39 to 63% <200 mesh. These finer than medium-size coal dust samples were collected from mines in seven of the ten MSHA Districts and represented approximately 26% of the overall mines sampled (16 of the 61 mines).

The results of the LLEM large-scale explosion tests with the medium-sized coal dust are shown in Figure 10. The coal dust particle size has a significant impact on the propagation potential for coal dust. As the coal dust particle size decreases, increasing amounts of rock dust are necessary to render the coal/rock dust mixture inert. The greatest impact is evident between the particle size of the coarse (20% < 200 mesh or 75 µm) coal dust and the pulverized (80% < 200 mesh or 75 µm) coal dust. To ensure non-propagation within the LLEM, the coarse coal dust required a 70% TIC (~68% rock dust) and the pulverized coal dust required a ~81.5% TIC (80% rock dust). Less significant differences occurred when the coal dust particle sizes were even finer than the pulverized. Once the 80% < 200 mesh benchmark had been reached, no further significant impact was measured with decreasing coal dust particle size. The 80% limit is also consistent with explosion limit models for coal and rock dust put forward by Richmond et al. [1975; 1979], Hertzberg et al. [1988], and Conti et al. [1991]. The models were essentially based on a thermal balance between the heat generated during the combustion of coal dust and heat abstracted by the incombustible material.

LLEM inerting studies using a medium-size coal dust showed that at least 76.4% TIC (Table C-4) is required to prevent explosion propagation. By extrapolating along the curve in Figure 10, an approximately 80% TIC would be required to prevent an explosion propagation with the finest-size intake airway coal dust sample collected during this recent survey (63% <200 mesh).

RECOMENDATION AND SUMMARY

Dust explosibility is strongly dependent on the fineness of the coal particles in a coal and rock dust mixture. Underground coal mining technology has changed significantly since the 1920s; i.e., coal mining has become highly mechanized, creating coal dust particles that are much finer than those of the 1920s. Despite this change in technology, particle size surveys from the early 20th century are still being used as the basis for current rock dusting regulations. While total incombustible content and methane concentration are important determinants of explosion propagation, coal dust particle size needs to be considered as an essential part of explosibility assessment in underground coal mines. The present coal size study indicates that the coal dust in intake airways of U.S. mines is significantly finer than that measured by Rice and Greenwald [1929] in the 1920s. Moreover, particle size can vary with coal seam type, as shown in Table 2. Based on the inerting data from the Bruceton and Lake Lynn Experimental Mines, the present size of coal particles in intake airways requires more incombustible content to be rendered inert than the 65% TIC specified in current regulations. Recent samples taken from return airways show that the coal dust particle size is roughly the same as “float coal dust” as established by the Coal Mine Health and Safety Act of 1969. Thus for return airways, the current requirement of 80% TIC is still sufficient.

Analysis of the MSHA dust survey data indicates that much more rock dust is being distributed in many areas of US mines than is needed to inert the coal dust. Despite this excessive rock dusting, a significant number of areas within U.S. mines still fall below current rock dusting requirements. This illustrates an obvious need for more efficient dusting methods. Real time assessment of rock dusting could improve the consistency of rock dusting across all mining areas. The CDEM can provide a real time assessment of the potential explosibility of a coal and rock dust mixture, This device and serves as a tool for the mine operator to rapidly identify areas deficient in rock dust and also to help manage the day-to-day distribution of rock dust.

Current rock dust regulations mandating a 65% TIC dust mixture provide no margin of safety since LLEM tests have shown that even a ~68% TIC dust mixture with coarse Pittsburgh seam coal dust (20% <200 mesh) will propagate dust explosions. LLEM inerting experiments also demonstrated that at least 76.4% TIC is required to prevent explosion propagation for medium-size coal dust (37% < 200 mesh)--i.e., an average of the finer dust found in modern intake areas. LLEM experiments have also shown that the TIC required to prevent flame propagation becomes much less dependent on coal particle size as the TIC approaches and exceeds 80%. Therefore, unless the coal particle size of the coal and rock dust sample is determined as part of the explosibility assessment, NIOSH recommends 80% TIC requirement for both intake and return airways. In addition, NIOSH agrees with and endorses the earlier recommendation of Nagy [1981] that new rock dusting standards should be based on a worst-case scenario (using high volatile coals) with no relaxation for lower volatile coals.

ACKNOWLEDGMENTS

The authors acknowledge the invaluable technical guidance from Harry Verakis, General Engineer, of the MSHA Approval and Certification Center, Triadelphia, WV, and Terry Montgomery, Supervisor Chemist, of the MSHA analytical laboratory, Mt. Hope, WV, for providing the dust samples and the percent incombustible data. We acknowledge the many MSHA inspectors for collecting the dust samples in coal mines throughout the U.S. The authors thank E. Cathy Hedrick, Information Technology Specialist, of MSHA for providing the intake and return sample data over the past 3 years; this data was used in Figure 9. The authors also acknowledge the laboratory assistance of the following NIOSH-PRL personnel for their efforts in the acid-leaching and size analysis of the dust samples: Kenneth Helfrich, Physical Science Technician, and Electronic Technicians Jon Jobko and Andrew Mazzella.

The authors also thank the following NIOSH-PRL personnel without whose contributions the 2008 LLEM inerting tests could not have been accomplished: William Slivensky, Frank Karnack, Donald Sellers, and James Addis, Physical Science Technicians at LLL, for their participation in the installation of sensors, construction of the methane ignition zones, and installation of the gas sampling lines, dispersal of the dust mixtures for each test, performing the experiments, post-explosion dust sampling, and documentation of other measurements; Kenneth Jackson, Electronics Technician at LLL, for sensor calibrations, operation of the data acquisition systems, and data analyses; and Paul Stefko, Foreman I – Miner Mechanic, of the Safety Research Coal Mine (SRCM) at PRL; Jack Teatino and Joseph Sabo, SRCM Miner Mechanics, for mining then grinding and/or pulverizing the coal to the proper particle size and preparing the coal/rock dust mixtures.

The authors acknowledge the following mechanical technicians with Ki Corporation (a NIOSH contractor) for their thorough cleanup of the debris and the washdown of the entry following each large-scale explosion test: Timothy Glad (lead), James Rabon, Bernard Lambie, and Brandin Lambie.

REFERENCES

ASTM International [2008]. Standard classification of coals by rank, D388-05. In: Annual Book of ASTM Standards, vol 5.06. West Conshohocken, PA: ASTM International.

Cashdollar KL, Sapko MJ, Weiss ES, Hertzberg M [1987]. Laboratory and mine dust explosion research at the Bureau of Mines. In: Cashdollar KL, Hertzberg M, eds. Industrial dust explosions. West Conshohocken, PA: American Society for Testing and Materials (ASTM), Special Technical Publication (STP) 958, pp. 107-123.

Cashdollar KL, Hertzberg M, Zlochower IA [1988]. Effect of volatility on dust flammability limits for coals, gilsonite, and polyethylene. In: Proceedings of the 22nd International Symposium on Combustion. The Combustion Institute Pittsburgh, PA, 1988 pp. 1757-1765.

Cashdollar KL, Hertzberg M [1989]. Laboratory study of rock dust inerting requirements: effects of coal volatility, particle size, and methane addition. In: Proceedings of the 23rd International Conference of Safety in Mines Research Institutes (Washington, DC, September 11-15, 1989). Pittsburgh, PA: U.S. Department of the Interior, Bureau of Mines, pp. 965-977.

Cashdollar KL, Weiss ES, Greninger NB, Chatrathi K [1992a]. Laboratory and large-scale dust explosion research. Plant/Operations Progress, 11, 247-255.

Cashdollar KL, Weiss ES, Greninger NB, Hertzberg M, Sapko MJ [1992b]. Laboratory and large-scale explosion research at the U.S. Bureau of Mines. In: Proceedings of The First World Seminar on the Explosion Phenomenon and on the Application of Explosion Protection Techniques in Practice (Brussels, Belgium). Section 1, 16 pp.

Cashdollar KL, Weiss ES, Greninger NB, Chatrathi K [1992c]. Laboratory and large-scale dust explosion research. In: Proceedings of the 26th Annual Loss Prevention Symposium (New Orleans, LA). Paper No. 72C. AIChE Spring National Meeting, 22 pp.

Cashdollar KL, Chatrathi K [1993]. Minimum explosible dust concentrations measured in 20-L and 1-m³ chambers. Combustion Science and Technology, 87, 157-171.

Cashdollar KL [1996]. Coal dust explosibility. J Loss Prev Process Ind 9(1): 65-76.

Cashdollar KL, Weiss ES, Montgomery TG, Going JE [2007]. Post-explosion observations of experimental mine and laboratory coal dust explosions. J Loss Prev Process Ind 20 (1): 607-615.

CFR, Code of federal regulations. Washington DC: U.S. Government Printing Office, Office of the Federal Register.

Conti RS, Zlochower IA, Sapko MJ [1991]. Rapid sampling of products during coal mine explosions. *Combustion Science and Technology*, 75, 195-209.

Cybulski WG [1975]. Coal dust explosions and their suppression. Translated from Polish. Warsaw, Poland: National Center for Scientific, Technical and Economic Information. NTIS No. TT 73-54001.

Dobroski H Jr., Stephan CR, Conti RS [1996]. Historical summary of coal mine explosions in the United States. 1981-1994. Pittsburgh, PA: U.S. Department of the Interior, Bureau of Mines, IC 9440.

Gates, RA, Philips RL, Urosek JE, Stephan CR, Stoltz RT, Swentosky DJ, Harris GW, O'Donnell JR Jr., Dresch RA [2007]. Report of investigation, fatal underground coal mine explosions, January, 2, 2006. Sago mine, Wolf Run Mining Company, Tallmansville, Upshur County, West Virginia, ID No. 46-08791. Arlington, VA: U.S. Department of Labor, Mine Safety and Health Administration.

Greninger N B, Cashdollar KL, Weiss ES, Sapko MJ [1991]. Suppression of dust explosions involving fuels of intermediate and high volatile content. In: *Proceedings of the Fourth International Colloquium on Dust Explosions*, Polish Academy of Sciences, Porabka-Kozubnik, Poland, November 4-9, 1990 (pp. 208-228).

Harris ML, Sapko MJ, Cashdollar KL, & Verakis H [2008]. Field Evaluation of the CDEM. *Mining Engineering*, October 2008, vol. 60, pp. 50-54.

Hertzberg M, Cashdollar KL [1987]. Introduction to dust explosions. In: Cashdollar KL, Hertzberg M, eds. *Industrial dust explosions*. West Conshohocken, PA: American Society for Testing and Materials (ASTM), Special Technical Publication (STP) 958, pp. 5-32.

Hertzberg M, Zlochower IA, Cashdollar KL [1988a]. Volatility model for coal dust flame propagation and extinguishment. In: *Proceedings of the 21st International Symposium on Combustion* (University of Munich, Germany). Pittsburgh, PA: The Combustion Institute, pp. 325-353.

Hertzberg M, Zlochower IA, Edwards JC [1988b]. Coal pyrolysis mechanisms and temperatures. Pittsburgh, PA: U.S. Department of the Interior, Bureau of Mines, RI 9169.

Lebecki K [1991]. Gas dynamics of coal dust explosion – theory and experiment. In: *Proceedings of the 24th International Conference of Safety in Mines Research Institutes* (Donetsk, USSR, September 23-28). Vol. 1. pp. 357-373.

Light TE, Herndon RC, Guley AR Jr., Cook GL, Odum MA, Bates RM Jr., Schroeder ME, Campbell CD, Pruitt ME [2007]. Report of investigation, fatal underground coal mine

explosions, May 20, 2006. Darby mine No. 1, Kentucky Darby LLC, Holmes Mill, Harlan County, Kentucky, ID No. 15-18185. Arlington, VA: U.S. Department of Labor, Mine Safety and Health Administration.

McKinney R, Crocco W, Stricklin KG, Murray KA, Blankenship ST, Davidson RD, Urosek JE, Stephan CR, Beiter DA [2002]. Report of investigation, fatal underground coal mine explosions, September 23, 2001. No. 5 Mine, Jim Walters Resources, Inc., Brookwood, Tuscaloosa County, Alabama, ID No. 01-01322. Arlington, VA: U.S. Department of Labor, Mine Safety and Health Administration.

Michelis J [1996]. Large scale experiments with coal dust explosions in connection with road-T-junctions. In: The Seventh International Colloquium on Dust Explosions; part of the International Symposium on Hazards, Prevention and Mitigation of Industrial Explosions (Bergen, Norway, June 23-26, 1996). Christian Michelsen Research, pp. 8.50-8.59.

Michelis J, Margenburg B, Müller G, Kleine W [1987]. Investigations into the buildup and development conditions of coal dust explosions in a 700-m underground gallery. In: Cashdollar KL, Hertzberg M, eds. Industrial dust explosions. West Conshohocken, PA: American Society for Testing and Materials (ASTM), Special Technical Publication (STP) 958, pp. 124-137.

Mine Safety Board. [1937]. Recommendations of the United States Bureau of Mines on certain questions of safety as of Oct. 1, 1936. Pittsburgh, PA: U.S. Department of the Interior, Bureau of Mines, IC 6946.

Montgomery T [2005]. Personal communication on incombustible analysis procedures.

MSHA [2008] Handbook Series, Handbook Number PH-08-V-1, General Coal Mine Inspection Procedures and Inspection Tracking System, January 1, 2008, pp45, pp. 60-66. <http://www.msha.gov/readroom/handbook/handbook.htm>

Nagy J [1981]. The explosion hazard in mining. Pittsburgh, PA: U.S. Department of Labor, Mine Safety and Health Administration, IR 1119.

Reed D, Michelis J [1989]. Comparative investigation into explosibility of brown coal and bituminous coal dust in surface and underground test installations. In: Proceedings of the 23rd International Conference of Safety in Mines Research Institutes (Washington, DC, September 11-15, 1989). Pittsburgh, PA: U.S. Department of the Interior, Bureau of Mines, pp. 941-964.

Rice GS, Greenwald HP [1929]. Coal-dust explosibility factors indicated by experimental mine investigations 1911 to 1929. Pittsburgh, PA: U.S. Department of the Interior, Bureau of Mines, Technical Paper 464.

Rice GS, Jones LM, Egy WL, Greenwald HP [1922]. Coal-dust explosion tests in the experimental mine 1913 to 1918, inclusive. Pittsburgh, PA: U.S. Department of the Interior, Bureau of Mines, Bulletin 167.

Rice GS [1927]. Effective rock-dusting of coal mines. Pittsburgh, PA: U.S. Department of the Interior, Bureau of Mines, IC 6039.

Richmond JK, Liebman I, & Miller LF [1975]. *Effect of rock dust on the explosibility of coal dust* (34 pp.). US Bureau of Mines, RI 8077.

Richmond JK, Liebman I, Bruszak AE, & Miller LF [1979]. A physical description of coal mine explosions, part II. Seventeenth symposium (international) on combustion (pp. 1257-1268). The Combustion Institute, Pittsburgh, PA.

Sapko MJ, Weiss ES, Watson RW [1987a]. Explosibility of float coal dust distributed over a coal-rock dust substratum. In: Proceedings of the 22nd International Conference of Safety in Mines Research Institutes (Beijing, China, November 2-6, 1987). Beijing, China: China Coal Industry Publishing House, pp. 459-468.

Sapko MJ, Weiss ES, Watson RW [1987b]. Size scaling of gas explosions: Bruceton Experimental Mine versus the Lake Lynn Mine. Pittsburgh, PA: U.S. Department of the Interior, Bureau of Mines, RI 9136. NTIS No. PB 88-230248.

Sapko MJ, Greninger NB, & Watson RW [1989]. Review paper: prevention and suppression of coal mine explosions. In: Proceedings of the 23rd International Conference of Safety in Mines Research Institutes (Washington, DC, September 11-15, 1989). Pittsburgh, PA: U.S. Department of the Interior, Bureau of Mines, pp. 791-807.

Sapko M J, Weiss ES, Cashdollar KL, Zlochower IA [1998]. Experimental mine and laboratory dust explosion research at NIOSH. In: Proceedings of the International Symposium on Hazards, Prevention, and Mitigation of Industrial Explosions: Eighth International Colloquium on Dust Explosions (Schaumburg, IL, insert date). Safety Consulting Engineers, pp. 120-142.

Sapko M J, Weiss ES, Cashdollar KL, Zlochower IA [2000]. Experimental mine and laboratory dust explosion research at NIOSH. *J Loss Prev Process Ind.* 13 (1): 229-242.

Sapko MJ, Verakis H [2006]. Technical evaluation of coal dust explosibility meter. SME 2006 Annual Meeting, St. Louis, MO. March 26-29, 2006, 7 pp.

Sapko MJ, Cashdollar KL, Green GM [2007]. Coal dust particle size survey of U.S. mines. *J Loss Prev Process Ind.* 20 (1): 616-620.

Triebisch G, Sapko MJ [1990]. Lake Lynn Laboratory: a state-of-the-art mining research laboratory. In: Proceedings of the International Symposium on Unique Underground Structures. Vol. 2. Golden, CO: Colorado School of Mines, pp. 75-1 to 75-21.

U.S. Code of Federal Regulations [2008]. Title 30 CFR, Part 75, Section 75.400 and 75.403.

U.S. Code of Federal Regulations [2008]. Title 30 CFR, Part 75, Section 75.2.

U.S. Congress [1969]. Federal Coal Mine Health and Safety Act of 1969. Public Law 91-173, 83 Stat. 742, pp. 32-33.

U.S. Congress [1977], Coal Mine Safety and Health Act of 1977, Public law 95-164, Section 304, p. 49.

Weiss ES, Greninger NB, Sapko MJ [1989]. Recent results of dust explosion studies at the Lake Lynn Experimental Mine. In: Proceedings of the 23rd International Conference of Safety in Mines Research Institutes (Washington, DC, September 11-15, 1989). Pittsburgh, PA: U.S. Department of the Interior, Bureau of Mines, pp. 843-856.

The Federal Coal Mine Safety Act of 1952.

APPENDIX A

SIZE ANALYSES OF COAL DUST FROM MINE INTAKE AIRWAYS

Table A-1. – Size analyses of coal dust from intake airways in six MSHA District 2 mines

Mine	Production, Mt/yr	Incombustible, %	Soluble, %	Size analysis		Ash, %	Corrected size analysis								D _{med} , μm
				<75 μm or -200 mesh, %	<212 μm or -70 mesh, %		<53 μm or -270 mesh, %	<75 μm or -200 mesh, %	<106 μm or -140 mesh, %	<150 μm or -100 mesh, %	<212 μm or -70 mesh, %	<300 μm or -50 mesh, %	<425 μm or -40 mesh, %	<600 μm or -30 mesh, %	
A	>1	74	55	35	64	40	21	25	33	44	56	69	83	92	178
		81	73	43	70	42	27	34	44	53	64	76	89	97	136
B	>1	54	52	38	71	22	25	32	43	55	68	80	91	97	130
		60	42	31	61	27	19	25	35	45	57	70	84	95	173
		82	69	41	72	40	25	31	41	52	64	76	89	97	143
		56	24	37	60	37	25	29	36	45	55	67	82	94	180
		72	61	33	59	30	22	27	34	44	54	67	82	94	186
C	>1	85	40	48	79	73	22	31	40	50	60	77	89	97	151
		86	58	31	62	23	21	26	35	44	57	72	85	95	176
		88	79	46	74	46	26	32	43	55	67	77	87	95	130
		75	48	35	62	47	23	27	35	44	57	70	86	97	177
D	>1	64	30	27	50	49	18	21	27	35	46	60	79	94	237
		70	51	39	65	36	23	30	36	44	55	68	82	93	184
		93	85	35	71	39	23	28	38	50	63	73	84	94	150
		67	42	34	59	38	24	28	34	44	55	70	85	96	182
E	<1	50	24	46	71	30	33	38	44	54	66	78	90	98	130
		75	66	38	64	21	30	36	43	53	63	73	84	95	135
F	<1	90	57	30	65	70	17	24	33	43	55	69	80	90	186
		90	73	28	61	58	15	22	31	41	54	70	86	96	191
		88	69	39	66	58	23	31	38	48	58	71	85	96	159
average for MSHA District 2.....							23	29	37	47	59	72	85	95	165
standard deviation.....							4	4	5	5	5	5	3	2	27

Notes: The incombustible content is the value measured by the MSHA Mt. Hope laboratory.

The soluble content is the percent that is soluble in hydrochloric acid (i.e., the calcium carbonate content of the limestone or marble rock dust), as measured at PRL.

The ash includes the ash in the coal plus the insoluble incombustible material (i.e., the clay or silica rock in the sample), as measured at PRL.

Table A-2. – Size analyses of coal dust from intake airways in seven MSHA District 3 mines

Mine	Production, Mt/yr	Incombustible, %	Soluble, %	Size analysis			Corrected size analysis								
				<75 µm or -200 mesh, %	<212 µm or -70 mesh, %	ash, %	<53 µm or -270 mesh, %	<75 µm or -200 mesh, %	<106 µm or -140 mesh, %	<150 µm or -100 mesh, %	<212 µm or -70 mesh, %	<300 µm or -50 mesh, %	<425 µm or -40 mesh, %	<600 µm or -30 mesh, %	D _{med} , µm
A	>1	55	27	29	61	21	20	27	35	46	60	75	90	98	165
B	>1	68	47	41	68	37	26	30	37	47	59	74	88	97	164
		70	44	31	61	46	17	22	30	40	53	70	86	97	199
C	>1	82	57	39	66	56	24	31	38	47	57	71	86	96	169
		97	96	42	71	35	28	38	48	58	70	75	85	93	113
		95	95	67	84	25	52	63	71	77	81	86	93	98	50
		90	81	47	77	44	28	36	45	57	66	78	89	97	123
		87	73	51	77	55	26	32	39	49	56	69	82	94	160
		86	72	37	71	47	23	32	41	52	63	78	91	98	141
		88	77	45	74	47	32	40	46	54	63	77	89	97	125
D	>1	83	81	45	76	20	32	39	49	61	72	82	91	97	108
		77	68	52	82	23	38	45	55	66	78	88	94	98	89
		91	74	40	72	55	20	25	35	47	59	73	87	95	164
		72	55	42	67	30	27	32	39	49	60	72	86	96	156
		46	11	37	62	33	24	29	36	45	56	69	84	96	175
		41	10	34	62	32	23	28	36	46	57	71	87	97	171
E	>1	80	59	46	82	44	27	34	46	60	74	86	95	99	117
		79	63	32	66	33	20	26	35	47	62	75	86	93	161
F	>1	83	75	43	75	40	25	32	43	54	66	78	89	97	134
		75	67	43	69	50	25	31	41	49	60	70	83	94	155
G	>1	58	39	29	55	23	21	28	34	43	54	65	79	92	189
		72	63	20	44	19	13	18	24	32	42	56	75	92	259
average for MSHA District 3							26	33	41	51	62	74	87	96	149
standard deviation							8	9	10	10	9	7	5	2	42

Notes: The incombustible content is the value measured by the MSHA Mt. Hope laboratory.

The soluble content is the percent that is soluble in hydrochloric acid (i.e., the calcium carbonate content of the limestone or marble rock dust), as measured at PRL.

The ash includes the ash in the coal plus the insoluble incombustible material (i.e., the clay or silica rock in the sample), as measured at PRL.

Table A-3. – Size analyses of coal dust from intake airways in seven MSHA District 4 mines

Mine	Production, Mt/yr	Incombustible, %	Soluble, %	Size analysis		ash, %	Corrected size analysis								D _{med} , μm
				<75 μm or -200 mesh, %	<212 μm or -70 mesh, %		<53 μm or -270 mesh, %	<75 μm or -200 mesh, %	<106 μm or -140 mesh, %	<150 μm or -100 mesh, %	<212 μm or -70 mesh, %	<300 μm or -50 mesh, %	<425 μm or -40 mesh, %	<600 μm or -30 mesh, %	
A	>1	65	51	42	70	30	26	34	44	54	64	75	86	96	131
		68	54	36	59	26	22	28	35	43	52	65	80	94	195
		64	35	45	69	43	29	36	44	54	64	75	87	97	133
		70	61	33	63	25	22	29	37	48	61	73	87	97	160
		89	83	52	80	35	34	41	50	62	74	85	95	99	106
		85	81	43	68	25	29	35	42	52	64	77	90	98	138
B	<1	82	40	40	63	61	24	30	36	45	55	68	82	94	181
		75	--	37	65	65	23	28	36	45	56	70	85	96	176
C	<1	68	18	30	54	59	21	25	32	41	52	65	82	96	199
		70	15	38	59	61	25	28	35	43	53	66	81	95	192
		69	21	32	56	57	18	22	27	36	47	61	79	94	231
		81	35	34	60	70	20	25	33	42	53	69	85	97	196
		78	33	38	60	68	26	29	35	44	56	67	83	96	179
D	<1	79	38	38	60	63	24	28	34	44	54	66	82	95	186
E	<1	47	9	47	82	37	29	36	47	61	75	88	95	99	114
		57	30	25	54	29	16	21	28	37	48	63	79	94	224
		37	3	32	59	27	20	25	33	43	54	67	81	94	188
		53	18	24	59	40	12	16	23	33	48	68	86	97	221
F	>1	77	58	45	71	48	31	36	44	55	65	78	91	98	129
		87	73	44	70	52	29	34	43	53	63	77	91	98	137
G	<1	40	23	45	84	23	35	43	53	67	83	93	97	99	98
		37	16	43	75	22	29	36	45	57	71	85	95	99	123
		49	na	33	69	29	24	30	39	51	67	83	93	98	147
average for MSHA District 4							25	30	38	48	60	73	87	97	165
standard deviation							6	6	7	9	10	9	6	2	39

Notes: The incombustible content is the value measured by the MSHA Mt. Hope laboratory.

The soluble content is the percent that is soluble in hydrochloric acid (i.e., the calcium carbonate content of the limestone or marble rock dust), as measured at PRL.

The ash includes the ash in the coal plus the insoluble incombustible material (i.e., the clay or silica rock in the sample), as measured at PRL.

Table A-4. – Size analyses of coal dust from intake airways in six MSHA District 5 mines

Mine	Production, Mt/yr	Incombustible, %	Soluble, %	Size analysis		ash, %	Corrected size analysis									D _{med} , μm
				<75 μm or -200 mesh, %	<212 μm or -70 mesh, %		<53 μm or -270 mesh, %	<75 μm or -200 mesh, %	<106 μm or -140 mesh, %	<150 μm or -100 mesh, %	<212 μm or -70 mesh, %	<300 μm or -50 mesh, %	<425 μm or -40 mesh, %	<600 μm or -30 mesh, %		
A	<1	64	43	32	58	34	25	31	39	49	60	72	84	95	156	
		57	28	26	52	44	23	29	36	45	57	68	82	94	173	
		68	60	38	61	32	28	34	41	50	59	71	85	96	150	
B	>1	66	57	47	72	30	27	30	39	49	61	73	86	96	154	
		63	63	52	78	20	40	47	55	65	75	83	92	98	87	
		87	85	31	56	39	18	26	33	42	51	64	81	94	203	
		48	43	37	62	26	24	31	39	50	60	72	85	95	151	
		35	24	23	48	26	16	21	27	37	47	61	78	92	227	
65	56	36	62	32	27	33	40	51	62	75	88	97	145			
C	<1	83	73	60	94	29	40	54	70	86	93	96	98	99	68	
		69	54	38	77	28	26	32	42	56	75	88	95	98	132	
		78	61	44	83	32	30	36	48	64	80	90	95	98	110	
D	<1	52	29	33	59	31	21	28	35	45	56	69	83	95	176	
		57	28	34	62	34	21	27	34	45	57	70	84	96	175	
E	>1	82	76	35	62	27	23	29	36	46	57	68	81	93	173	
		72	58	32	65	21	22	28	36	46	62	76	89	98	164	
		67	52	26	62	25	21	22	36	45	58	70	84	96	172	
F	<1	77	58	38	61	43	27	32	38	47	58	69	84	96	166	
		80	67	35	60	43	25	30	37	46	57	69	83	96	170	
		76	63	30	58	33	16	26	34	44	55	67	81	94	183	
average for MSHA District 5							25	31	40	50	62	74	86	96	157	
standard deviation							6	8	9	11	11	9	5	2	36	

Notes: The incombustible content is the value measured by the MSHA Mt. Hope laboratory.

The soluble content is the percent that is soluble in hydrochloric acid (i.e., the calcium carbonate content of the limestone or marble rock dust), as measured at PRL.

The ash includes the ash in the coal plus the insoluble incombustible material (i.e., the clay or silica rock in the sample), as measured at PRL.

Table A-5. – Size analyses of coal dust from intake airways in five MSHA District 6 mines

Mine	Production, Mt/yr	Incombustible, %	Soluble, %	Size analysis		ash, %	Corrected size analysis								D _{med} , μm
				<75 μm or -200 mesh, %	<212 μm or -70 mesh, %		<53 μm or -270 mesh, %	<75 μm or -200 mesh, %	<106 μm or -140 mesh, %	<150 μm or -100 mesh, %	<212 μm or -70 mesh, %	<300 μm or -50 mesh, %	<425 μm or -40 mesh, %	<600 μm or -30 mesh, %	
A	>1	63	31	37	64	41	20	25	33	42	53	66	83	96	195
		54	26	38	61	35	23	28	35	43	54	66	81	95	188
		51	14	33	58	45	21	26	33	42	53	66	82	95	193
B	<1	36	17	28	56	18	19	25	31	41	52	65	82	96	200
		40	22	28	56	20	18	23	29	37	50	65	82	96	214
		37	20	38	63	17	27	33	40	48	58	69	82	94	164
		35	21	40	64	17	29	35	42	50	60	71	85	96	150
		35	19	35	62	18	23	29	36	46	57	70	83	94	173
		37	20	38	64	19	27	32	39	48	58	72	87	97	160
C	>1	77	50	30	55	56	17	22	28	37	48	64	81	95	220
		73	20	42	65	65	28	32	39	50	61	73	86	97	150
		73	24	35	59	64	18	24	30	39	49	64	81	96	215
D	>1	76	25	46	82	67	25	29	38	51	63	77	89	97	145
		76	29	47	72	69	27	34	45	56	64	73	85	97	124
		74	21	42	75	67	22	30	38	48	61	78	89	97	161
		71	17	50	77	65	28	33	41	52	62	74	84	95	142
		72	12	52	83	67	29	34	45	59	69	79	87	96	120
E	<1	84	81	60	79	30	45	55	63	70	77	83	92	98	64
		84	75	50	79	34	34	42	51	62	71	81	90	97	102
		64	47	40	64	26	29	34	41	50	59	70	84	96	151
		86	77	36	69	42	23	29	37	49	61	75	88	97	155
		56	41	37	67	21	26	32	39	50	62	77	90	98	150
		56	41	36	62	23	26	32	39	48	59	71	85	96	162
average for MSHA District 6							25	31	39	49	59	72	85	96	160
standard deviation							6	7	8	8	7	6	3	1	37

Notes: The incombustible content is the value measured by the MSHA Mt. Hope laboratory.

The soluble content is the percent that is soluble in hydrochloric acid (i.e., the calcium carbonate content of the limestone or marble rock dust), as measured at PRL.

The ash includes the ash in the coal plus the insoluble incombustible material (i.e., the clay or silica rock in the sample), as measured at PRL.

Table A-6. – Size analyses of coal dust from intake airways in five MSHA District 7 mines

Mine	Production, Mt/yr	Incombustible, %	Soluble, %	Size analysis		ash, %	Corrected size analysis								D _{med} , μm
				<75 μm or -200 mesh, %	<212 μm or -70 mesh, %		<53 μm or -270 mesh, %	<75 μm or -200 mesh, %	<106 μm or -140 mesh, %	<150 μm or -100 mesh, %	<212 μm or -70 mesh, %	<300 μm or -50 mesh, %	<425 μm or -40 mesh, %	<600 μm or -30 mesh, %	
A	<1	79	65	41	67	51	23	29	37	46	55	68	82	95	175
		79	65	44	74	50	24	29	39	51	60	74	87	96	147
		81	62	41	68	52	22	29	38	48	58	72	85	96	164
		78	60	37	65	46	21	27	35	45	55	69	84	95	179
B	<1	92	80	62	78	63	52	56	63	69	75	80	84	90	~46
		92	83	66	82	63	49	54	62	69	76	82	88	94	59
		92	78	63	83	62	48	54	61	69	78	82	88	94	60
C	<1	89	62	44	77	65	20	27	37	50	61	74	87	97	149
		87	66	55	83	59	29	37	47	59	71	84	93	98	117
		96	87	45	74	74	24	28	37	52	63	72	85	95	143
		90	78	59	86	61	29	36	43	58	69	81	90	97	124
D	<1	91	78	45	70	59	22	29	42	51	59	71	85	96	144
		61	24	39	64	49	22	27	35	45	55	69	84	95	179
		74	28	36	63	60	20	26	33	42	53	67	82	95	195
E	<1	77	38	38	66	58	19	25	32	40	52	66	82	95	200
		88	69	59	85	59	31	35	47	58	67	78	88	96	117
		91	74	64	83	62	36	41	49	58	66	76	87	96	110
		82	70	34	61	39	19	23	29	39	49	65	81	94	215
average for MSHA District 7	<1	84	64	57	75	53	33	37	44	53	62	74	86	96	136
		29	34	43	53	62	74	86	95	140					
standard deviation							10	10	10	9	8	6	3	2	48

Notes: The incombustible content is the value measured by the MSHA Mt. Hope laboratory.

The soluble content is the percent that is soluble in hydrochloric acid (i.e., the calcium carbonate content of the limestone or marble rock dust), as measured at PRL.

The ash includes the ash in the coal plus the insoluble incombustible material (i.e., the clay or silica rock in the sample), as measured at PRL.

Table A-7. – Size analyses of coal dust from intake airways in six MSHA District 8 mines

Mine	Production, Mt/yr	Incombustible, %	Soluble, %	Size analysis		ash, %	Corrected size analysis								D _{med} , μm
				<75 μm or -200 mesh, %	<212 μm or -70 mesh, %		<53 μm or -270 mesh, %	<75 μm or -200 mesh, %	<106 μm or -140 mesh, %	<150 μm or -100 mesh, %	<212 μm or -70 mesh, %	<300 μm or -50 mesh, %	<425 μm or -40 mesh, %	<600 μm or -30 mesh, %	
A	>1	92	81	27	54	64	14	18	25	35	47	59	76	92	234
		97	93	38	66	52	21	27	37	48	60	70	83	95	160
B	>1	82	49	49	69	51	23	27	34	42	51	64	80	94	208
		81	49	53	77	57	24	29	39	48	58	70	83	95	161
C	>1	75	45	42	71	46	24	27	35	45	58	73	86	97	171
		68	30	43	79	56	22	27	38	51	65	78	91	98	145
D	>1	67	32	50	68	46	29	33	39	47	57	68	84	96	167
		78	57	53	74	46	33	38	45	54	65	77	90	98	130
		65	21	41	63	51	20	26	33	41	52	68	84	96	198
		68	33	46	69	45	25	30	39	48	58	70	84	95	162
E	>1	84	19	47	73	77	26	30	37	49	59	73	89	98	156
		82	23	41	66	75	25	30	36	46	56	71	86	97	175
		76	22	43	67	66	25	29	36	46	57	69	85	96	172
		79	23	49	70	68	27	30	37	46	55	68	83	96	178
F	>1	86	63	55	80	63	30	33	43	54	65	78	89	96	132
		73	43	50	74	43	27	32	41	50	60	72	85	95	149
		88	63	54	83	57	24	30	44	56	67	81	92	98	127
		67	25	36	61	44	15	17	24	34	47	62	80	95	230
average for MSHA District 8							24	29	37	47	57	71	85	96	170
standard deviation							5	5	5	6	6	6	4	2	31

Notes: The incombustible content is the value measured by the MSHA Mt. Hope laboratory.

The soluble content is the percent that is soluble in hydrochloric acid (i.e., the calcium carbonate content of the limestone or marble rock dust), as measured at PRL.

The ash includes the ash in the coal plus the insoluble incombustible material (i.e., the clay or silica rock in the sample), as measured at PRL.

Table A-8. – Size analyses of coal dust from intake airways in seven MSHA District 9 mines

Mine	Production, Mt/yr	Incombustible, %	Soluble, %	Size analysis		ash, %	Corrected size analysis									D _{med} , μm
				<75 μm or -200 mesh, %	<212 μm or -70 mesh, %		<53 μm or -270 mesh, %	<75 μm or -200 mesh, %	<106 μm or -140 mesh, %	<150 μm or -100 mesh, %	<212 μm or -70 mesh, %	<300 μm or -50 mesh, %	<425 μm or -40 mesh, %	<600 μm or -30 mesh, %		
A	>1	84	74	42	71	48	21	28	36	47	56	69	83	94	170	
		59	27	35	62	40	19	26	34	44	54	67	82	94	187	
		88	77	39	71	49	23	31	40	51	61	75	88	97	147	
		81	65	44	70	44	27	33	42	53	61	74	87	96	135	
B	>1	83	70	32	62	26	19	26	34	45	56	70	85	97	176	
C	>1	92	85	46	74	45	23	30	42	52	61	74	87	97	139	
		60	53	35	63	25	20	26	34	44	57	71	87	97	178	
		71	53	45	71	38	25	31	41	51	63	75	89	97	146	
		53	25	42	66	33	24	28	36	46	56	70	84	95	173	
		85	81	40	68	39	21	27	39	49	59	72	86	96	153	
D	>1	81	87	34	63	36	16	22	30	40	49	62	77	92	220	
		78	72	37	64	22	23	30	37	47	58	70	84	95	166	
		78	72	38	70	21	25	31	41	52	64	78	90	98	141	
		82	77	33	61	23	20	26	33	43	54	66	82	95	190	
E	>1	76	68	35	61	15	25	30	37	46	57	68	83	94	172	
		53	53	25	50	12	17	21	28	36	47	60	78	93	232	
F	<1	40	31	26	55	9	17	24	31	41	53	68	84	95	196	
		56	49	30	63	11	20	28	36	48	61	75	90	99	159	
		47	34	29	59	10	20	27	34	44	56	70	86	97	179	
G	<1	54	55	26	64	12	16	21	30	43	60	79	92	98	174	
average for MSHA District 8							21	27	36	46	57	71	85	96	172	
standard deviation							3	3	4	4	4	5	4	2	26	

Notes: The incombustible content is the value measured by the MSHA Mt. Hope laboratory.

The soluble content is the percent that is soluble in hydrochloric acid (i.e., the calcium carbonate content of the limestone or marble rock dust), as measured at PRL.

The ash includes the ash in the coal plus the insoluble incombustible material (i.e., the clay or silica rock in the sample), as measured at PRL.

Table A-9. – Size analyses of coal dust from intake airways in five MSHA District 10 mines

Mine	Production, Mt/yr	Incombustible, %	Soluble, %	Size analysis		ash, %	Corrected size analysis								D _{med} , μm
				<75 μm or -200 mesh, %	<212 μm or -70 mesh, %		<53 μm or -270 mesh, %	<75 μm or -200 mesh, %	<106 μm or -140 mesh, %	<150 μm or -100 mesh, %	<212 μm or -70 mesh, %	<300 μm or -50 mesh, %	<425 μm or -40 mesh, %	<600 μm or -30 mesh, %	
A	>1	67	49	42	73	41	25	30	39	50	62	77	90	98	148
		89	76	44	80	47	26	31	43	57	70	83	94	99	126
		72	na	42	73	41	23	29	39	50	59	71	84	95	147
		62	39	43	69	35	26	31	40	49	58	71	85	95	154
		74	52	41	72	44	23	27	37	48	58	74	88	96	161
		67	57	37	71	35	23	28	38	50	62	74	86	96	150
		89	82	52	82	41	29	41	56	66	75	85	94	99	93
		58	27	42	78	43	25	31	41	54	66	80	91	98	135
		56	32	50	81	40	14	22	37	52	65	79	90	97	144
		66	34	45	72	49	23	27	35	45	52	65	80	93	195
B	>1	86	74	37	71	41	21	27	36	48	60	73	85	94	159
		85	75	35	67	37	22	27	37	49	61	72	85	96	154
		84	72	37	71	35	25	30	41	51	62	75	87	96	145
		89	80	35	71	37	21	26	36	48	61	76	87	96	159
		87	78	36	69	29	22	27	37	48	60	73	86	96	159
		82	68	31	67	37	18	24	32	43	55	69	83	94	184
C	>1	75	52	35	63	38	21	26	33	43	53	66	81	94	196
		83	67	47	76	42	26	31	41	53	64	75	86	96	137
		89	77	54	80	45	27	38	52	60	67	77	87	96	100
		68	34	43	77	44	25	32	43	55	66	78	88	96	129
		79	47	33	70	56	17	24	32	43	53	68	81	94	195
		92	78	44	78	54	23	30	40	52	62	75	88	97	140
D	>1	86	74	36	67	42	22	28	38	49	59	71	83	92	156
		75	59	37	68	37	21	28	39	48	59	72	85	96	159
		86	70	34	70	42	19	25	38	49	59	72	87	96	153
		83	64	39	73	45	21	28	40	51	62	76	88	96	145
E	>1	75	51	48	71	51	27	31	38	47	57	69	82	94	168
		71	42	46	69	43	27	30	37	46	56	70	83	94	171
average for MSHA District 8							23	29	39	50	61	74	86	96	152
standard deviation							3	4	5	5	5	5	4	2	24

Notes: The incombustible content is the value measured by the MSHA Mt. Hope laboratory.
 The soluble content is the percent that is soluble in hydrochloric acid (i.e., the calcium carbonate content of the limestone or marble rock dust), as measured at PRL.
 The ash includes the ash in the coal plus the insoluble incombustible material (i.e., the clay or silica rock in the sample), as measured at PRL.

Table A-10. – Size analyses of coal dust from intake airways in seven MSHA District 11 mines

Mine	Production, Mt/yr	Incombustible, %	Soluble, %	Size analysis		ash, %	Corrected size analysis									D _{med} , μm
				<75 μm or -200 mesh, %	<212 μm or -70 mesh, %		<53 μm or -270 mesh, %	<75 μm or -200 mesh, %	<106 μm or -140 mesh, %	<150 μm or -100 mesh, %	<212 μm or -70 mesh, %	<300 μm or -50 mesh, %	<425 μm or -40 mesh, %	<600 μm or -30 mesh, %		
A	>1	90	78	46	72	53	23	27	35	44	55	69	83	95	185	
		91	79	47	79	57	25	31	41	52	66	80	91	98	141	
B	>1	89	82	35	62	31	23	28	35	45	55	69	83	95	180	
		54	30	31	57	32	21	28	35	44	55	67	81	94	184	
C	>1	85	77	49	80	39	34	40	50	62	75	89	96	99	106	
		86	80	51	83	33	35	42	52	65	78	90	96	99	99	
D	>1	94	92	61	97	25	41	53	69	88	96	98	99	100	70	
		58	41	40	71	28	29	36	45	55	68	84	95	99	128	
E	>1	71	63	55	91	21	40	50	63	78	90	96	98	99	76	
		89	78	42	73	25	29	36	45	56	70	84	94	99	126	
		84	77	51	91	25	34	45	60	77	90	95	97	98	86	
		91	84	43	66	38	26	31	38	47	57	68	81	93	168	
		90	83	34	56	32	19	23	30	38	48	60	75	90	224	
F	>1	68	63	47	93	10	33	45	60	79	92	98	99	100	85	
		72	64	56	94	20	41	52	68	83	93	97	98	99	71	
		62	55	47	85	16	35	45	59	74	86	93	97	99	85	
		55	43	43	80	20	35	44	48	63	78	91	97	99	112	
		66	64	28	70	7	19	27	36	50	69	90	98	99	149	
		45	31	54	92	18	42	51	63	77	91	98	99	99	72	
G	<1	47	28	35	64	22	24	29	37	46	58	75	90	98	169	
		59	44	36	67	25	23	29	38	49	61	77	92	98	156	
		58	38	50	87	29	33	42	55	71	84	94	98	99	94	
		40	16	32	56	31	23	28	35	44	54	67	82	94	185	
average for MSHA District 8							30	37	48	60	73	84	92	97	128	
standard deviation							7	10	12	15	15	12	7	3	46	

Notes: The incombustible content is the value measured by the MSHA Mt. Hope laboratory.

The soluble content is the percent that is soluble in hydrochloric acid (i.e., the calcium carbonate content of the limestone or marble rock dust), as measured at PRL.

The ash includes the ash in the coal plus the insoluble incombustible material (i.e., the clay or silica rock in the sample), as measured at PRL.

APPENDIX B

SIZE ANALYSES OF COAL DUST FROM MINE RETURN AIRWAYS

Table B-1. – Size analyses of coal dust from return airways in 36 mines

Mine	Production, Mt/yr	Incombustible, %	Soluble, %	Size analysis		ash, %	Corrected size analysis								
				<75 µm or -200 mesh, %	<212 µm or -70 mesh, %		<53 µm or -270 mesh, %	<75 µm or -200 mesh, %	<106 µm or -140 mesh, %	<150 µm or -100 mesh, %	<212 µm or -70 mesh, %	<300 µm or -50 mesh, %	<425 µm or -40 mesh, %	<600 µm or -30 mesh, %	D _{med} , µm
1	>1	86	74	83	92	24	74	83	87	90	93	95	97	98	~30
		80	74	63	80	34	55	62	66	73	79	86	94	99	44
		87	76	72	88	41	62	69	74	79	83	88	93	98	42
2	>1	68	53	40	62	45	33	37	42	48	58	71	87	97	155
3	>1	63	40	57	72	35	44	47	52	59	66	75	85	95	91
		75	54	76	85	43	68	71	74	77	82	89	95	99	~20-25
4	<1	77	69	28	55	19	22	27	33	42	54	66	81	94	188
5	>1	82	79	85	93	12	78	84	88	90	93	95	98	99	~36
6	>1	80	75	59	76	15	52	58	63	68	75	82	90	97	49
7	>1	91	75	52	82	65	46	52	58	67	76	87	96	99	67
8	>1	72	45	63	78	43	52	57	62	68	75	82	91	98	45
9	>1	85	78	42	72	26	29	36	45	57	69	80	91	97	122
10	<1	46	14	38	83	32	24	30	40	55	79	95	99	100	135
11	>1	75	60	33	62	38	22	26	34	44	57	72	88	98	176
12	<1	37	24	27	54	18	19	24	32	42	53	66	80	93	193
13	<1	70	58	38	64	36	30	35	42	52	64	75	88	97	140
14	>1	71	75	42	68	22	30	35	43	53	63	75	87	96	137
15	>1	83	83	47	73	32	31	37	45	56	67	78	89	97	124
16	>1	76	54	41	64	49	24	27	34	42	54	68	84	96	190
17	>1	72	19	42	63	61	26	30	36	44	55	67	82	95	184
18	<1	50	29	32	56	27	24	30	37	45	55	67	82	95	178
19	<1	92	78	75	90	62	60	64	69	77	83	90	96	99	30
20	<1	89	68	36	62	60	20	25	33	43	54	68	85	97	189
21	<1	81	14	43	75	79	27	33	38	47	57	76	90	98	171
22	<1	86	62	56	75	65	32	35	43	52	61	72	84	94	141
23	>1	83	53	53	74	59	27	31	37	46	57	72	88	97	170
24	>1	64	40	38	63	132	22	29	36	45	56	69	83	95	178
25	>1	62	22	42	63	40	24	28	34	42	52	66	83	96	199
		56	22	43	65	37	25	29	35	44	55	69	87	97	182
26	>1	89	79	82	93	59	64	71	77	81	84	90	95	99	30
		70	70	47	69	28	33	40	47	56	64	75	87	95	121
27	>1	79	69	46	73	29	31	37	45	56	67	80	91	98	124
28	>1	77	74	36	60	19	23	28	35	44	53	66	81	93	189
29	<1	66	53	30	54	12	21	26	32	40	50	63	80	94	211
30	<1	61	40	35	57	34	23	28	33	41	51	64	80	94	208
		62	16	39	66	54	25	30	37	46	57	73	88	97	171
31	>1	88	81	36	62	39	20	26	35	44	51	64	79	93	201

Mine	Production, Mt/yr	Incombustible, %	Soluble, %	Size analysis		ash, %	Corrected size analysis								
				<75 µm or -200 mesh, %	<212 µm or -70 mesh, %		<53 µm or -270 mesh, %	<75 µm or -200 mesh, %	<106 µm or -140 mesh, %	<150 µm or -100 mesh, %	<212 µm or -70 mesh, %	<300 µm or -50 mesh, %	<425 µm or -40 mesh, %	<600 µm or -30 mesh, %	D _{med} , µm
32	<1	65	21	44	70	52	25	29	35	44	54	69	83	95	186
33	<1	96	95	81	89	60	65	71	76	80	83	88	93	98	~25-30
34	>1	94	90	58	79	36	40	46	54	62	72	82	91	97	91
		93	88	50	79	26	33	40	49	61	74	87	95	99	109
35	>1	88	82	47	66	42	27	32	38	45	54	66	80	92	183
		39	25	38	66	17	28	33	41	50	62	77	91	98	148
36	<1	41	26	26	55	16	18	23	30	39	52	69	87	97	203
average for all MSHA Districts							35	41	47	55	65	76	88	97	132
standard deviation							17	17	16	14	12	10	6	2	62

Notes: The incombustible content is the value measured by the MSHA Mt. Hope laboratory.
The soluble content is the percent that is soluble in hydrochloric acid (i.e., the calcium carbonate content of the limestone rock dust), as measured at PRL.
The ash includes the ash in the coal plus the insoluble incombustible material (i.e., the clay or silica rock in the sample), as measured at PRL.

Table B-2. – Size analyses of coal dust from return airways for seven Pittsburgh seam coal mines

States	Mines	Samples	<53 µm or -270 mesh, %	<75 µm or -200 mesh, %	<106 µm or -140 mesh, %	<150 µm or -100 mesh, %	<212 µm or -70 mesh, %	<300 µm or -50 mesh, %	<425 µm or -40 mesh, %	D _{med} , µm
PA,WV	7	10	56	62 ± 15	67	72	78	85	93	58 ± 39

APPENDIX C

**DISCUSSION OF THE COAL DUST AND ROCK DUST PROPERTIES AND
EXPERIMENTS**

Limestone Rock Dust Inerting Discussion

From 1985 through 2001, numerous LLEM coal dust explosion tests were conducted in the single entry D-drift and more recently in A-drift (2008) to determine the concentration of rock dust required to prevent explosion propagation as a function of coal dust particle size, volatility, and other related issues (Tables C-1 through C-3).

During the LLEM tests with the pulverized Pittsburgh seam coal dust (~80% <200 mesh or 75 μm), the total incombustible content (TIC) required to prevent an explosion propagation was ~81.5%. This determination was based on a series of 11 explosion tests (Table C-4) [Cashdollar et al. 1987; 1992a,b; Weiss et al. 1989; Greninger et al. 1991; Sapko et al. 1989; 1998; 2000]. In two of these tests (LLEM tests #51 and #401), the flame ended well within the dust zone. In the three tests (LLEM tests #70, #255, and #386) where the TIC was 79%, the flame travel extended to or slightly beyond the end of the dust zone and was therefore considered a marginal propagation.

During the LLEM tests with the coarse Pittsburgh seam coal dust (~20% <200 mesh or 75 μm) [Sapko et al. 1989; Weiss et al. 1989; Greninger et al. 1990], a 70% TIC dust mixture prevented an explosion propagation (LLEM test #191). A TIC of ~68% resulted in a propagating explosion (LLEM test #71) with flame extension nearly 150 ft (46 m) beyond the end of the dust zone.

Prior to having recent access to the MSHA band samples collected from underground coal mines throughout the country, there was growing evidence from limited dust surveys that the coal dust particle size had been decreasing since the promulgation of the existing rock dusting regulations. This decrease occurred as new mining technologies were adopted by the industry-- e.g., mining methods involving the continuous mining machine and the longwall shearer. For this reason, several intermediate coal dust particle size explosion tests were conducted within the LLEM. One test (LLEM test #88) involved the use of medium-size Pittsburgh seam coal dust (~45% <200 mesh or 75 μm). To achieve this coal dust blend, pulverized coal dust was added to the coarse dust. For this single test, the medium-sized coal dust was mixed with rock dust to result in a ~67% TIC for the coal/rock dust mixture. Upon ignition of the methane zone, this mixture resulted in a propagating explosion with flame travel over 500 ft (152 m) beyond the end of the dust zone.

Four additional tests were later conducted with a blend of pulverized and fine coal dust to provide an average coal dust particle size ranging from 83 to 85% less than 200 mesh or 75 μm . This pulverized-fine dust mixture, when mixed with rock dust to result in an ~79% TIC dust mixture, produced a marginal propagation with flame travel about 30 ft (9 m) beyond the end of the dusted zone (LLEM tests #357 and #387). The results from these tests were similar to the tests with the pulverized coal (80% <200 mesh or 75 μm) except for a slight increase in the flame extension.

One additional test (LLEM test #388) was conducted with a fine Pittsburgh seam coal dust (95% <200 mesh or 75 μm). The fine coal dust was mixed with rock dust, resulting in a ~79% TIC dust mixture. When tested, the flame extended 30 ft (9 m) beyond the end of the dust zone and was therefore considered a marginal propagation.

The Sunnyside seam coal dust from Utah was also evaluated within the LLEM [Weiss et al. 1989]. This coal is similar to the Pittsburgh seam coal dust. During the LLEM tests with the pulverized Sunnyside seam coal dust (~80% <200 mesh or 75 μm), an ~81.5% TIC dust mixture

prevented an explosion propagation (refer to Table C-5). A marginal propagation resulted when the coal dust was mixed with rock dust resulting in a TIC of 80%. For the coarse Sunnyside seam coal dust (~20% <200 mesh or 75 μm), a non-propagation resulted when using a coal/rock dust mixture of 75% TIC, and a marginal propagation occurred when using a coal/rock dust mixture of 70% TIC. These explosion test results are similar to that of the Pittsburgh seam coal dust.

Based on the LLEM explosion tests, the coal dust particle size has a significant impact on the propagation potential for a coal dust. As the coal dust particle size decreases, increasing amounts of rock dust are necessary to render the coal/rock dust mixture inert. The greatest impact is evident between the particle size of the coarse (20% <200 mesh or 75 μm) coal dust and the pulverized (80% <200 mesh or 75 μm) coal dust. To ensure non-propagation within the LLEM, the coarse coal dust required a 70% TIC and the pulverized coal dust required a ~81.5% TIC. Less significant differences occurred when the coal dust particle sizes were even finer than the pulverized.

During the first test (LLEM test #517) with the medium-sized coal dust (38% <200 mesh or 75 μm), a 74% TIC dust mixture resulted in a flame extension 20 ft (6 m) beyond the end of the dusted zone and was considered a marginal propagation. Two tests (LLEM tests #518 and #522) were conducted with an ~76% TIC dust mixture and resulted in a non-propagation with flame ending at 270 ft (82 m) from the closed end face, which was well within the 300-ft long dusted zone that extended 340 ft (104 m) from the face. A 71% TIC mixture using the medium-sized coal dust resulted in a propagating explosion with flame extending 220 ft (67 m) beyond the end of the dust zone (LLEM test #520). The results of these medium-sized coal dust inerting tests are summarized in Table C-4.

Table C- 1.—Pittsburgh and Sunnyside seam coal dust sizes

Size	Year	<38 µm or -400 mesh, %	<75 µm or -200 mesh, %	<150 µm or -100 mesh, %	<300 µm or -50 mesh, %	<600 µm or -30 mesh, %	D _s , µm	D _w , µm	D _{med} , µm
Pittsburgh seam bituminous coal from PA									
Coarse	1980s	9	19	30	43	65	96	440	380
Coarse	2008	10	20	34	53	82	84	320	270
Medium	2008	16	38	61	79	100	55	166	104
Pulverized	1980s	41	80	99	100	100	28	48	45
Pulverized	2008	30	69	98	100	100	33	60	57
Pulverized-fine	1999	64	85	97	100	100	21	40	31
Fine	1999	86	95	98	100	100	17	24	<38
Sunnyside seam bituminous coal from UT									
Coarse	1980s	10	20	34	52	77	85	367	283
Pulverized (lot #1138)	1980s	38	83	99	100	100	36	52	48

Table C- 2.—Limestone rock dust sizes

Size	Year	<38 µm or -400 mesh, %	<75 µm or -200 mesh, %	<150 µm or -100 mesh, %	<300 µm or -50 mesh, %	<600 µm or -30 mesh, %	D _s , µm	D _w , µm	D _{med} , µm
Pulverized	1980s	62	76	95	100	100	14	47	24
Pulverized	2007	54	72	98	100	100	10	51	26

Table C-3. Average proximate and ultimate analyses of coal used in the LLEM experiments.

	Pittsburgh Coal	Sunnyside Coal
	As received, %	As received, %
Proximate analysis		
Moisture	1.7	1.2
Volatile Matter	36.5	38.1
Fixed Carbon	55.6	54.1
Ash	6.2	6.6
Total	100.0	100.0
Ultimate analysis		
Hydrogen	5.4	5.5
Carbon	77.4	75.5
Nitrogen	1.5	1.5
Oxygen	8.1	10.2
Sulfur	1.4	0.7
Ash	6.2	6.6
Total	100.0	100.0
Heating value, Btu/lb	13,803	13,632

Table C-4.—LLEM inerting tests for Pittsburgh seam coal dust and limestone rock dust

LLEM test no. - entry	Date	Gas zone, ft	Coal dust				Rock dust, %	Total Incombustible, %	Flame travel, ft	Result
			Size	-200 Mesh, %	Zone, ft	Conc., g/m ³				
49-D	7/17/85	40	pulverized	~80	40-250	200	70.0	72.3	750	P
50-D	7/25/85	40	pulverized	~80	40-250	200	75.0	77.1	500	P
51-D	8/1/85	40	pulverized	~80	40-250	200	80.0	81.5	240	NP
53-D	9/4/85	40	pulverized	~80	40-640	200	75.0	77.1	>750	P
69-D	4/24/86	40	pulverized	~80	40-250	200	73.0	75.2	675	P
70-D	5/1/86	40	pulverized	~80	40-250	200	77.0	78.8	320	M
71-D	5/8/86	40	coarse	~20	40-250	200	65.0	67.8	390	P
77-D	8/6/86	40	coarse	~20	40-250	200	50.0	54.0	500	P
83-D	10/9/86	40	pulverized	~80	40-250	200	65.0	67.8	>750	P
87-D	11/20/86	40	coarse	~20	40-250	200	60.0	63.2	600	P
88-D	11/25/86	40	medium	~45	40-250	200	65.0	67.2	750	P
90-D	1/8/87	40	pulverized	~80	40-430	200	65.0	67.2	750	P
190-D	6/21/89	40	coarse	~20	40-310	200	73.0	75.0	175	NP
191-D	7/12/89	40	coarse	~20	40-310	200	67.7	70.0	230	NP
255-D	1/16/91	40	pulverized	~80	40-500	200	77.2	79.0	490	M
352-D	9/30/97	40	pulv/fine	~83	40-250	200	83.0	84.4	160	NP
353-D	10/27/97	40	pulv/fine	~83	40-250	200	80.0	81.6	225	NP
357-D	12/17/97	40	pulv/fine	~83	40-250	200	77.0	78.8	315	M
386-D	9/8/99	40	pulverized	72	40-310	200	77.0	78.8	310	M
387-D	9/15/99	40	pulv/fine	85	40-310	150	77.0	78.8	330	M
388-D	9/23/99	40	fine	95	40-310	150	77.0	78.8	340	M
398-D	3/1/01	40	pulverized	~80	40-460	200	65.0	67.2	1250	P
401-D	3/28/01	40	pulverized	~80	40-460	200	80.0	81.6	200	NP
512-A	1/9/08	40	pulverized	69	40-340	200	75.0	77.0	390	P
513-A	1/15/08	40	pulverized	69	40-340	200	80.0	81.5	250	NP
514-A	1/23/08	40	coarse	20½	40-340	200	64.0	66.9	380	P
516-A	2/6/08	40	coarse	20½	40-340	200	69.0	71.5	280	NP
517-A	2/13/08	40	medium	38½	40-340	200	71.7	74.0	360	M
518-A	2/27/08	40	medium	38½	40-340	200	74.4	76.4	270	NP
520-A	3/12/08	40	medium	38½	40-340	200	68.5	71.0	560	P
522-A	3/26/08	40	medium	38½	40-340	200	74.4	76.4	270	NP

Table C-5.—LLEM inerting tests for Sunnyside seam coal dust and limestone rock dust

LLEM test no. - entry	Date	Gas zone, ft	Coal dust				Rock dust, %	Total Incombustible, %	Flame travel, ft	Result
			Size	-200 Mesh, %	Zone, ft	Conc., g/m ³				
144-D	4/6/88	40	pulverized	~80	40-250	200	80.0	81.5	230	NP
145-D	4/13/88	40	pulverized	~80	40-250	200	80.0	81.5	220	NP
146-D	4/20/88	40	coarse	~20	40-250	200	62.2	65.0	380	P
147-D	4/27/88	40	coarse	~20	40-250	200	67.6	70.0	280	M
148-D	5/4/88	40	coarse	~20	40-250	200	73.0	75.0	230	NP
173-D	11/8/88	40	pulverized	~80	40-310	200	73.0	75.0	>750	P
174-D	11/17/88	40	pulverized	~80	40-310	200	78.3	80.0	310	M

Effect of Particle Size on Coal Dust Explosibility

The effect of coal dust particle size on explosibility is illustrated in Figure C-1, which contains data collected from large-scale explosions conducted in the LLEM from the 1985 through 2008. This curve shows the amount of incombustible required to prevent propagation for coal dust containing 20 to 85% particles passing a no. 200 sieve (< 75 μm). Given the experimental test conditions, the dashed curve represents the boundary above which propagation did not occur. Experimental results also show that the TIC required to prevent flame propagation becomes much less dependent on coal particle size as the TIC approaches 80%.

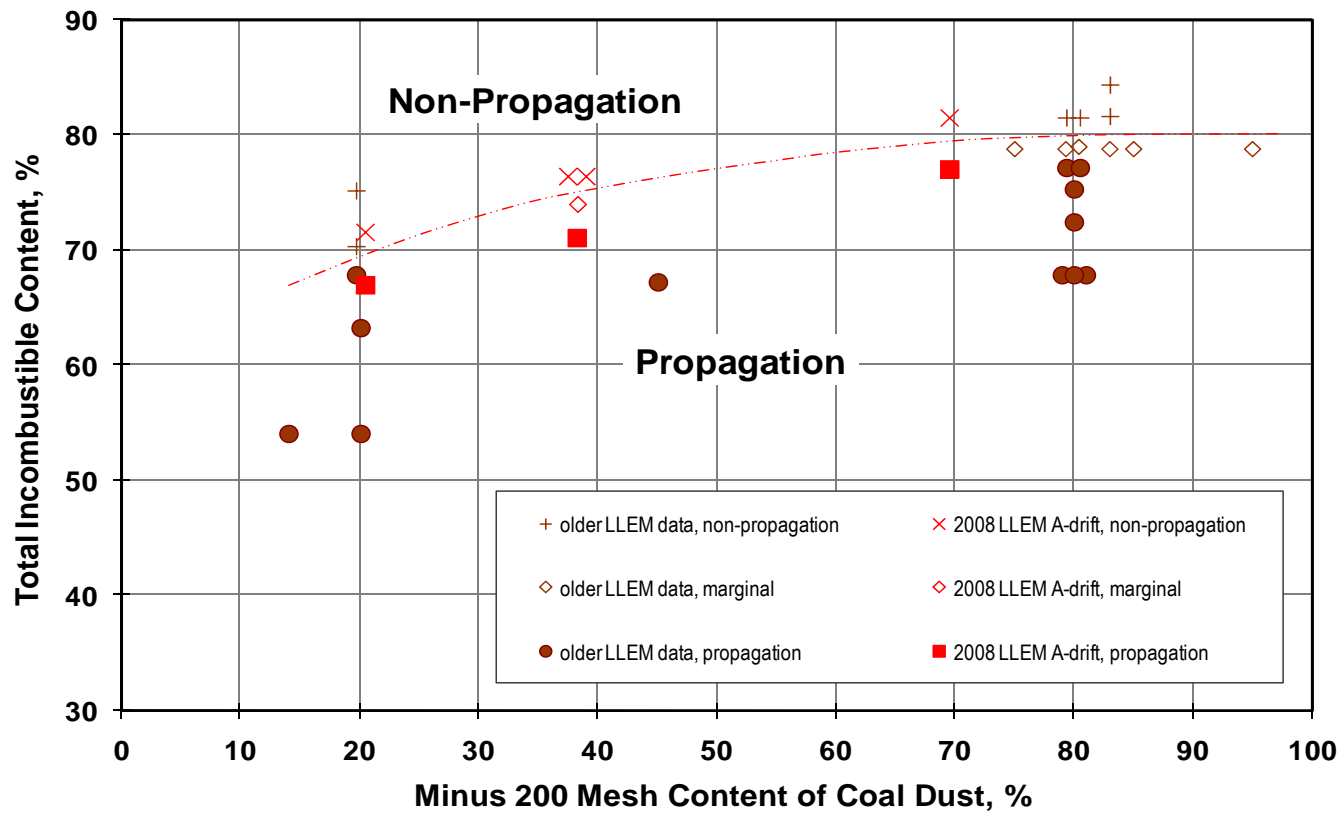


Figure C-1 . Effect of particle size of coal dust on the explosibility of Pittsburgh seam bituminous coal.