

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28

**IMMEDIATELY DANGEROUS TO LIFE OR HEALTH (IDLH) VALUE PROFILE**

**FOR**

**N-BUTYL ACRYLATE**

**[CAS NO. 141-32-2]**

**Department of Health and Human Services**  
Centers for Disease Control and Prevention  
National Institute for Occupational Safety and Health

1 **DISCLAIMER**

2 Mention of any company or product does not constitute endorsement by the National Institute for Occupational  
3 Safety and Health (NIOSH). In addition, citations of Web sites external to NIOSH do not constitute NIOSH  
4 endorsement of the sponsoring organizations or their programs or products. Furthermore, NIOSH is not  
5 responsible for the content of these Web sites.  
6

7 **ORDERING INFORMATION**

8 This document is in the public domain and may be freely copied or reprinted. To receive NIOSH documents or  
9 other information about occupational safety and health topics, contact NIOSH at

10 **Telephone: 1-800-CDC-INFO (1-800-232-4636)**

11 TTY: 1-888-232-6348

12 E-mail: [cdcinfo@cdc.gov](mailto:cdcinfo@cdc.gov)

13

14 or visit the NIOSH Web site at [www.cdc.gov/niosh](http://www.cdc.gov/niosh).

**External Review Draft  
March 2015**

**1 Foreword**

2 Chemicals are a ubiquitous component of the modern workplace. Occupational exposures to chemicals have the  
3 potential to adversely affect the health and lives of workers. Acute or short-term exposures to high concentrations  
4 of some airborne chemicals have the ability to quickly overwhelm workers, resulting in a spectrum of undesirable  
5 health outcomes that may inhibit the ability to escape from the exposure environment (e.g., irritation of the eyes  
6 and respiratory tract or cognitive impairment), cause severe irreversible effects (e.g., damage to the respiratory  
7 tract or reproductive toxicity), and in extreme cases, cause death. Airborne concentrations of chemicals capable  
8 of causing such adverse health effects or of impeding escape from high-risk conditions may arise from a variety of  
9 non-routine workplace situations, including special work procedures (e.g., in confined spaces), industrial  
10 accidents (e.g., chemical spills or explosions), and chemical releases into the community (e.g., during  
11 transportation incidents or other uncontrolled-release scenarios).

12  
13 The “immediately dangerous to life or health air concentration values (IDLH values)” developed by the National  
14 Institute for Occupational Safety and Health (NIOSH) characterize these high-risk exposure concentrations and  
15 conditions [NIOSH 2013]. IDLH values are based on a 30-minute exposure duration and have traditionally  
16 served as a key component of the decision logic for the selection of respiratory protection devices [NIOSH 2004].  
17 Occupational health professionals have employed these values beyond their initial purpose as a component of the  
18 NIOSH Respirator Selection Logic to assist in developing Risk Management Plans for non-routine work practices  
19 governing operations in high-risk environments (e.g., confined spaces) and the development of Emergency  
20 Preparedness Plans.

21  
22 The approach used to derive IDLH values for high priority chemicals is outlined in the NIOSH Current  
23 Intelligence Bulletin (CIB) 66: Derivation of Immediately Dangerous to Life or Health Values [NIOSH 2013].  
24 CIB 66 provides 1) an update on the scientific basis and risk assessment methodology used to derive IDLH  
25 values, 2) the rationale and derivation process for IDLH values, and 3) a demonstration of the derivation of  
26 scientifically credible IDLH values using available data resources.

27  
28 The purpose of this technical report is to present the IDLH value for n-butyl acrylate (CAS # 141-23-2). The  
29 scientific basis, toxicologic data and risk assessment approach used to derive the IDLH value are summarized to  
30 ensure transparency and scientific credibility.

31  
32 John Howard, M.D.  
33 Director  
34 National Institute for Occupational Safety and Health

**External Review Draft  
March 2015**

1 Centers for Disease Control and Prevention

DRAFT - DO NOT DISTRIBUTE OR CITE

External Review Draft  
March 2015

1 **Contents**

2 **FOREWORD** ..... III

3 **ABBREVIATIONS** ..... VI

4 **GLOSSARY** ..... VII

5 **ACKNOWLEDGMENTS** ..... XI

6 **1.0 INTRODUCTION**..... 1

7 1.1 OVERVIEW OF THE IDLH VALUE FOR N-BUTYL ACRYLATE ..... 1

8 1.2 PURPOSE ..... 1

9 1.3 GENERAL SUBSTANCE INFORMATION ..... 1

10 **2.0 ANIMAL TOXICITY DATA**..... 4

11 **3.0 HUMAN DATA** ..... 7

12 **4.0 SUMMARY**..... 7

13 **5.0 REFERENCES** ..... 8

14  
15  
16  
17  
18

DRAFT - DO NOT DISTRIBUTE OR CITE

*This information is distributed solely for the purpose of pre-dissemination peer review under applicable information quality guidelines. It has not been formally disseminated by the National Institute for Occupational Safety and Health. It does not represent and should not be construed to represent any agency determination or policy.*

**External Review Draft  
March 2015**

**1 Abbreviations**

2		
3	ACGIH	American Conference of Governmental Industrial Hygienists
4	AEGL	Acute Exposure Guideline Levels
5	AIHA	American Industrial Hygiene Association
6	BMC	benchmark concentration
7	BMCL	benchmark concentration lower confidence limit
8	C°	Celsius
9	C	ceiling
10	CAS	chemical abstract service
11	ERPG	Emergency Response Planning Guidelines
12	IDLH	immediately dangerous to life or health
13	LC <sub>50</sub>	median lethal concentration
14	LC <sub>Lo</sub>	lowest concentration of a chemical that caused death in humans or animals
15	LEL	lower explosive limit
16	LOAEL	lowest observed adverse effect level
17	mg/m <sup>3</sup>	milligram(s) per cubic meter
18	mmHg	millimeter(s) of mercury
19	NAC	National Advisory Committee
20	NAS	National Academy of Sciences
21	NIOSH	National Institute for Occupational Safety and Health
22	NOAEL	no observed adverse effect level
23	OSHA	Occupational Safety and Health Administration
24	PEL	permissible exposure limit
25	ppm	parts per million
26	RD <sub>50</sub>	concentration of a chemical in the air that is estimated to cause a 50% decrease in the respiratory rate
27		
28	REL	recommend exposure limit
29	SCP	Standard Completion Program
30	STEL	short term exposure limit
31	TLV	threshold limit value
32	TWA	time weighted average
33	UEL	upper explosive limit
34	WEEL	workplace environmental exposure level

**External Review Draft  
March 2015**

1 **Glossary**

2  
3 **Acute Exposure:** Exposure by the oral, dermal, or inhalation route for 24 hours or less.

4 **Acute Exposure Guideline Levels (AEGLs):** Threshold exposure limits for the general public applicable to  
5 emergency exposure periods ranging from 10 minutes to 8 hours. AEGL-1, AEGL 2, and AEGL-3 are  
6 developed for five exposure periods (10 and 30 minutes, 1 hour, 4 hours, and 8 hours) and are distinguished  
7 by varying degrees of severity of toxic effects ranging from transient, reversible effects to life-threatening  
8 effects [NAS 2001]. AEGLs are intended to be guideline levels used during rare events or single once-in-a-  
9 lifetime exposures to airborne concentrations of acutely toxic, high-priority chemicals [NAS 2001]. The  
10 threshold exposure limits are designed to protect the general population, including the elderly, children or  
11 other potentially sensitive groups that are generally not considered in the development of workplace exposure  
12 recommendations (additional information available at <http://www.epa.gov/oppt/aegl/>).

13 **Acute Reference Concentration (RfC):** An estimate (with uncertainty spanning perhaps an order of magnitude)  
14 of a continuous inhalation exposure for an acute duration (24 hours or less) of the human population  
15 (including sensitive subgroups) that is likely to be without an appreciable risk of deleterious effects during a  
16 lifetime. It can be derived from a NOAEL, LOAEL, or benchmark concentration, with uncertainty factors  
17 (UFs) generally applied to reflect limitations of the data used. Generally used in USEPA noncancer health  
18 assessments [USEPA 2014].

19 **Acute Toxicity:** Any poisonous effect produced within a short period of time following an exposure, usually 24  
20 to 96 hours.

21 **Adverse Effect:** A substance-related biochemical change, functional impairment, or pathologic lesion that affects  
22 the performance of an organ or system or alters the ability to respond to additional environmental challenges.

23 **Benchmark Dose/Concentration (BMD/BMC):** A dose or concentration that produces a predetermined change  
24 in response rate of an effect (called the benchmark response, or BMR) compared to background [USEPA  
25 2014] (additional information available at <http://www.epa.gov/ncea/bmds/>).

26 **Benchmark Response (BMR):** A predetermined change in response rate of an effect. Common defaults for the  
27 BMR are 10% or 5%, reflecting study design, data variability, and sensitivity limits used.

28 **BMCL:** A statistical lower confidence limit on the concentration at the BMC [USEPA 2014].

29 **Bolus Exposure:** A single, relatively large dose.

30 **Ceiling Value (“C”):** U.S. term in occupational exposure indicating the airborne concentration of a potentially  
31 toxic substance that should never be exceeded in a worker’s breathing zone.

32 **Chronic Exposure:** Repeated exposure for an extended period of time. Typically exposures are more than  
33 approximately 10% of life span for humans and >90 days to 2 years for laboratory species.

34 **Critical Study:** The study that contributes most significantly to the qualitative and quantitative assessment of risk  
35 [USEPA 2014].

36  
37 **Dose:** The amount of a substance available for interactions with metabolic processes or biologically significant  
38 receptors after crossing the outer boundary of an organism [USEPA 2014].

39 **EC<sub>t50</sub>:** A combination of the effective concentration of a substance in the air and the exposure duration that is  
40 predicted to cause an effect in 50% (one half) of the experimental test subjects.

**External Review Draft  
March 2015**

- 1 **Emergency Response Planning Guidelines (ERPGs):** Maximum airborne concentrations below which nearly all  
2 individuals can be exposed without experiencing health effects for 1-hour exposure. ERPGs are presented in a  
3 tiered fashion with health effects ranging from mild or transient to serious, irreversible, or life threatening  
4 (depending on the tier). ERPGs are developed by the American Industrial Hygiene Association [AIHA 2006].
- 5 **Endpoint:** An observable or measurable biological event or sign of toxicity ranging from biomarkers of initial  
6 response to gross manifestations of clinical toxicity.
- 7 **Exposure:** Contact made between a chemical, physical, or biological agent and the outer boundary of an  
8 organism. Exposure is quantified as the amount of an agent available at the exchange boundaries of the  
9 organism (e.g., skin, lungs, gut).
- 10 **Extrapolation:** An estimate of the response at a point outside the range of the experimental data, generally  
11 through the use of a mathematical model, although qualitative extrapolation may also be conducted. The  
12 model may then be used to extrapolate to response levels that cannot be directly observed.
- 13 **Hazard:** A potential source of harm. Hazard is distinguished from risk, which is the probability of harm under  
14 specific exposure conditions.
- 15 **Immediately Dangerous to Life or Health (IDLH) condition:** A situation that poses a threat of exposure to  
16 airborne contaminants when that exposure is likely to cause death or immediate or delayed permanent adverse  
17 health effects or prevent escape from such an environment [NIOSH 2004, 2013].
- 18 **IDLH value:** A maximum (airborne concentration) level above which only a highly reliable breathing apparatus  
19 providing maximum worker protection is permitted [NIOSH 2004, 2013]. IDLH values are based on a 30-  
20 minute exposure duration.
- 21 **LC<sub>01</sub>:** The statistically determined concentration of a substance in the air that is estimated to cause death in 1% of  
22 the test animals.
- 23 **LC<sub>50</sub>:** The statistically determined concentration of a substance in the air that is estimated to cause death in 50%  
24 (one half) of the test animals; median lethal concentration.
- 25 **LC<sub>LO</sub>:** The lowest lethal concentration of a substance in the air reported to cause death, usually for a small  
26 percentage of the test animals.
- 27
- 28 **LD<sub>50</sub>:** The statistically determined lethal dose of a substance that is estimated to cause death in 50% (one half) of  
29 the test animals; median lethal concentration.
- 30 **LD<sub>LO</sub>:** The lowest dose of a substance that causes death, usually for a small percentage of the test animals.
- 31 **LEL:** The minimum concentration of a gas or vapor in air, below which propagation of a flame does not occur in  
32 the presence of an ignition source.
- 33 **Lethality:** Pertaining to or causing death; fatal; referring to the deaths resulting from acute toxicity studies. May  
34 also be used in lethality threshold to describe the point of sufficient substance concentration to begin to cause  
35 death.
- 36 **Lowest Observed Adverse Effect Level (LOAEL):** The lowest tested dose or concentration of a substance that  
37 has been reported to cause harmful (adverse) health effects in people or animals.

**External Review Draft  
March 2015**

- 1 **Mode of Action:** The sequence of significant events and processes that describes how a substance causes a toxic  
2 outcome. Mode of action is distinguished from the more detailed mechanism of action, which implies a more  
3 detailed understanding on a molecular level.
- 4 **No Observed Adverse Effect Level (NOAEL):** The highest tested dose or concentration of a substance that has  
5 been reported to cause no harmful (adverse) health effects in people or animals.
- 6 **Occupational Exposure Limit (OEL):** Workplace exposure recommendations developed by governmental  
7 agencies and non-governmental organizations. OELs are intended to represent the maximum airborne  
8 concentrations of a chemical substance below which workplace exposures should not cause adverse health  
9 effects. OELs may apply to ceiling, short-term (STELs), or time-weighted average (TWA) limits.
- 10 **Peak Concentration:** Highest concentration of a substance recorded during a certain period of observation.
- 11 **Permissible Exposure Limit (PEL):** Occupational exposure limits developed by OSHA (29 CFR 1910.1000) or  
12 MSHA (30 CFR 57.5001) for allowable occupational airborne exposure concentrations. PELs are legally  
13 enforceable and may be designated as ceiling, STEL, or TWA limits.
- 14
- 15 **Point of Departure (POD):** The point on the dose–response curve from which dose extrapolation is initiated.  
16 This point can be the lower bound on dose for an estimated incidence or a change in response level from a  
17 concentration–response model (BMC), or it can be a NOAEL or LOAEL for an observed effect selected from  
18 a dose evaluated in a health effects or toxicology study.
- 19 **RD<sub>50</sub>:** The statistically determined concentration of a substance in the air that is estimated to cause a 50% (one  
20 half) decrease in the respiratory rate.
- 21 **Recommended Exposure Limit (REL):** Recommended maximum exposure limit to prevent adverse health  
22 effects based on human and animal studies and established for occupational (up to 10-hour shift, 40-hour  
23 week) inhalation exposure by NIOSH. RELs may be designated as ceiling, STEL, or TWA limits.
- 24 **Short-Term Exposure Limit (STEL):** A worker’s 15-minute time-weighted average exposure concentration that  
25 shall not be exceeded at any time during a work day.
- 26 **Target Organ:** Organ in which the toxic injury manifests in terms of dysfunction or overt disease.
- 27 **Threshold Limit Values (TLVs®):** Recommended guidelines for occupational exposure to airborne  
28 contaminants, published by the American Conference of Governmental Industrial Hygienists (ACGIH). TLVs  
29 refer to airborne concentrations of chemical substances and represent conditions under which it is believed  
30 that nearly all workers may be repeatedly exposed, day after day, over a working lifetime, without adverse  
31 effects. TLVs may be designated as ceiling, short-term (STELs), or 8-hr TWA limits.
- 32 **Time-Weighted Average (TWA):** A worker’s 8-hour (or up to 10-hour) time-weighted average exposure  
33 concentration that shall not be exceeded during an 8-hour (or up to 10-hour) work shift of a 40-hour week.  
34 The average concentration is weighted to take into account the duration of different exposure concentrations.
- 35 **Toxicity:** The degree to which a substance is able to cause an adverse effect on an exposed organism.
- 36
- 37 **Uncertainty Factors (UFs):** Mathematical adjustments applied to the POD when developing IDLH values. The  
38 UFs for IDLH value derivation are determined by considering the study and effect used for the POD, with  
39 further modification based on the overall database.

**External Review Draft  
March 2015**

- 1 **Workplace Environmental Exposure Levels (WEELs):** Exposure levels developed by the American Industrial  
2 Hygiene Association (AIHA) that provide guidance for protecting most workers from adverse health effects  
3 related to occupational chemical exposures expressed as a TWA or ceiling limit.  
4

DRAFT - DO NOT DISTRIBUTE OR CITE

**External Review Draft  
March 2015**

1 **Acknowledgments**

2

3 This document was developed by the Education and Information Division (Paul Schulte, Ph.D., Director). G.  
4 Scott Dotson, Ph.D., was the project officer and lead NIOSH author for this technical report. The basis for this  
5 document was a report contracted by NIOSH and prepared by Andrew Maier, Ph.D., Ann Parker, and Lynn  
6 Haber, Ph.D. (Toxicology Excellence for Risk Assessment [TERA]).

7

8 **Education and Information Division**

9 Devin Baker, M.Ed.

10 Charles L. Geraci, Ph.D.

11 Thomas J. Lentz, Ph.D.

12 Richard Niemeier, Ph.D.

13 Chris Sofge, Ph.D.

14

15 NIOSH would like to acknowledge the contribution of the following subject matter experts for their critical  
16 technical review of this report.

17

18 Mary A. Fox, Ph.D., Assistant Professor; Co-Director, Risk Sciences and Public Policy Institute;  
19 Department of Health Policy and Management, Bloomberg School of Public Health, Johns Hopkins  
20 University

21

22 Richard B. Schlesinger, Ph.D., Fellow A.T.S., Senior Associate Dean for Academic Affairs and Research  
23 Professor of Biology, Dyson College of Arts and Sciences, Pace University

## 1.0 Introduction

### 1.1 Overview of the IDLH Value for n-Butyl Acrylate

**IDLH Value:** 113 ppm

**Basis for IDLH Value:** The IDLH value for n-butyl acrylate is based on the 30-minute RD<sub>50</sub> (concentration estimated to result in a 50% depression in breathing rate) of 340 ppm in mice [Kirkpatrick 2003]. This effect is classified as potentially escape impairing. Application of an uncertainty factor of 3 to account for extrapolation from a threshold for escape-impairing effects in animals, animal to human differences, and human variability, results in an IDLH value of **113 ppm**.

### 1.2 Purpose

This *IDLH Profile* presents (1) a brief summary of technical data associated with acute inhalation exposures to n-butyl acrylate and (2) the rationale behind the Immediately Dangerous to Life or Health (IDLH) value for n-butyl acrylate. IDLH values are developed based on the scientific rationale and logic outlined in the NIOSH Current Intelligence Bulletin (CIB) 66: Derivation of Immediately Dangerous to Life or Health (IDLH) values [NIOSH 2013]. As described in CIB 66, NIOSH performs in-depth literature searches to ensure that all relevant data from human and animal studies with acute exposures to the substance are identified. Information included in CIB 66 on the literature search includes pertinent databases, key terms, and guides for evaluating data quality and relevance for the establishment of an IDLH value. The information that is identified in the in-depth literature search is evaluated with general considerations that include description of studies (i.e., species, study protocol, exposure concentration and duration), health endpoint evaluated, and critical effect levels (e.g., NOAELs, LOAELs, LC<sub>50</sub> values). For n-butyl acrylate, the in-depth literature search was conducted through February 2014.

### 1.3 General Substance Information

**Chemical:** n-Butyl acrylate

**CAS No:** 141-32-2


**Synonyms:** 2-Propenoic acid butyl ester; Acrylic acid butyl ester (8Cl); Butyl acrylate \*

*This information is distributed solely for the purpose of pre-dissemination peer review under applicable information quality guidelines. It has not been formally disseminated by the National Institute for Occupational Safety and Health. It does not represent and should not be construed to represent any agency determination or policy.*

External Review Draft  
March 2015

1 **Chemical category:** Carboxylic acid esters<sup>†</sup>  
2  
3  
4

5 **Structural formula:**

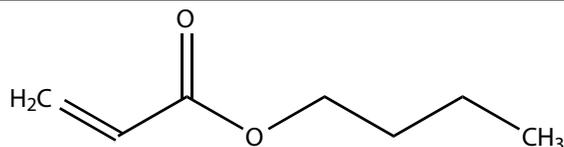

6  
7  
8  
9 Table 1 highlights selected physicochemical properties of n-butyl acrylate relevant to IDLH conditions. Table 2  
10 provides alternative exposure guidelines for n-butyl acrylate. Table 3 summarizes the Acute Exposure Guidelines  
11 Level (AEGL) values for n-butyl acrylate.

12  
13 **Table 1: Physicochemical Properties of n-Butyl Acrylate**  
14

Property	Value
Molecular weight	128.17 <sup>‡</sup>
Chemical formula	C <sub>7</sub> H <sub>12</sub> O <sub>2</sub>
Description	Colorless liquid
Odor	Strong, fruity; Rancid; Plastic
Odor Threshold	0.00096-0.10 ppm <sup>*</sup>
UEL	8% <sup>†</sup>
LEL	1.2% <sup>†</sup>
Vapor pressure	5.45 mmHg at 25°C (77°F) <sup>‡</sup>
Flash point	28.89°C (84°F) <sup>‡</sup>
Ignition temperature	292.78°C (559°F) <sup>‡</sup>
Solubility	Slightly soluble in water <sup>†</sup>

15 **Abbreviation:** °C – Celsius; °F – Fahrenheit; mmHg – millimeter mercury; LEL – lower explosive limit; UEL – upper explosive limit

16 <sup>‡</sup>HSDB [2014], <sup>\*</sup>AEGL [2007]; <sup>†</sup>IFA [2014]  
17

18 **Table 2: Alternative Exposure Guidelines for n-Butyl Acrylate**  
19

Organization	Value
Original (SCP) IDLH value	None
NIOSH REL	10 ppm (55 mg/m <sup>3</sup> ), TWA
OSHA PEL [2014]	10 ppm (55 mg/m <sup>3</sup> ), TWA 8-hr
ACGIH TLV [2014]	2 ppm, TWA
AIHA ERPG [2010]	ERPG-1: 0.05 ppm; ERPG-2: 25 ppm; ERPG-3: 250 ppm
AIHA WEEL [2010]	Not available

20 **Abbreviation:** ACGIH – American Conference of Governmental Industrial Hygienists; AIHA – American Industrial Hygiene  
21 Association; ERPG – Emergency Response Preparedness Guidelines; IDLH – immediately dangerous to life or health; NIOSH – National  
22 Institute for Occupational Safety and Health; OSHA – Occupational Safety and Health Administration; PEL – permissible exposure limit;  
23 REL – recommended exposure limit; SCP – Standards Completion Program; WEEL – workplace environmental exposure level  
24

*This information is distributed solely for the purpose of pre-dissemination peer review under applicable information quality guidelines. It has not been formally disseminated by the National Institute for Occupational Safety and Health. It does not represent and should not be construed to represent any agency determination or policy.*

**External Review Draft  
March 2015**

1 **Table 3: AEGL Values for n-Butyl Acrylate**

2

<b>Classification</b>	<b>10-min</b>	<b>30-min</b>	<b>1-hour</b>	<b>4-hour</b>	<b>8-hour</b>	<b>Endpoint [reference]</b>
AEGL-1	8.3 ppm 44.0 mg/m <sup>3</sup>	8.3 ppm 44.0 mg/m <sup>3</sup>	8.3 ppm 44.0 mg/m <sup>3</sup>	8.3 ppm 44.0 mg/m <sup>3</sup>	8.3 ppm 44.0 mg/m <sup>3</sup>	No clinical signs with repeated exposures [Rohm and Haas Co. 1992; Merkle and Klimisch 1983]
AEGL-2	160.0 ppm 850.0 mg/m <sup>3</sup>	160.0 ppm 850.0 mg/m <sup>3</sup>	130.0 ppm 690.0 mg/m <sup>3</sup>	81.0 ppm 430.0 mg/m <sup>3</sup>	53.0 ppm 280.0 mg/m <sup>3</sup>	Clinical signs and histopathology with repeated exposure [Klimisch et al. 1978]
AEGL-3	820.0 ppm 4,400.0 mg/m <sup>3</sup>	820.0 ppm 4,400.0 mg/m <sup>3</sup>	480.0 ppm 2,600.0 mg/m <sup>3</sup>	170.0 ppm 906.0 mg/m <sup>3</sup>	97.0 ppm 520.0 mg/m <sup>3</sup>	Calculated BMCL <sub>05</sub> from LC <sub>50</sub> data [Oberly and Tansy 1985]

3 **Abbreviation:** AEGL – acute exposure guideline levels; mg/m<sup>3</sup> – milligrams per cubic meter; min – minute; NR – not recommended due to inadequate data; ppm – parts per million

4 **\*References:** NAS [2007]

DRAFT - DO NOT DISTRIBUTE FOR PASTE

## 2.0 Animal Toxicity Data

The available data on n-butyl acrylate lethality and toxicity are limited. LC<sub>50</sub> values were not substantially different among hamsters, rats, and mice. Engelhardt and Klimisch [1983] exposed hamsters and rats to n-butyl acrylate for 6 hours/day for 4 days at concentrations of 817 and 820 ppm, respectively. Clinical signs, dyspnea, disequilibrium, and bloody discharge from the eyes and noses were observed; no deaths occurred in rats, however, four male hamsters died during the exposure period. N-butyl acrylate caused clinical signs of irritation in all species tested.

The most reliable animal lethality data came from the Oberly and Tansy [1985] 4-hour LC<sub>50</sub> study in rats. Male Sprague-Dawley rats were exposed whole body for 4 hours to 1,990, 2,035, 2,500, 2,828, or 3,041 ppm n-butyl acrylate followed by a 14-day observation period. Vapor concentration was determined by gas chromatography. During exposures animals had normal behavior during the first few minutes, then exhibited irritation of the eyes, nose, and respiratory tract and labored breathing. All deaths occurred within 24 hours and were attributed to cardiopulmonary collapse. The number of deaths at each concentration was 0, 1, 3, 5, and 7, respectively. The 4-hour LC<sub>50</sub> was calculated as 2,730 ppm. NAS [2007] calculated a 4-hour lethality BMCL<sub>05</sub> value (a statistical lower confidence limit on the dose that produces a predetermined change in response rate of an adverse effect) by log-probit analysis using US EPA Benchmark Dose Software version 1.3.2. The resulting 4-hour BMCL<sub>05</sub> of 1,652 ppm was adjusted to a 30-minute exposure duration concentration of 8,179 ppm. Kirkpatrick [2003] measured respiratory depression in mice; the lowest effect level for respiratory depression was 100 ppm, the no effect level was 30 ppm, and the calculated RD<sub>50</sub> was 340 ppm. In a 4-hour LC<sub>50</sub> study in rats, BASF [1979b,c; 1980] reported severe irritation at 677 ppm.

Table 4 summarizes the LC data identified in animal studies and provides 30-minute equivalent derived values for n-butyl acrylate. Table 5 provides non-lethal data reported in animal studies with 30-minute equivalent derived values. Information in this table includes species of test animals, toxicological metrics (i.e., LC, NOAEL, LOAEL), adjusted 30-minute concentration, and the justification for the composite uncertainty factors applied to calculate the derived values.

**External Review Draft  
March 2015**

**Table 4: Lethal Concentration Data for n-Butyl Acrylate**

Reference	Species	LC <sub>50</sub> (ppm)	LC <sub>10</sub> (ppm)	Time (min)	Adjusted 30-min Concentration*	Composite Uncertainty Factor	Derived Value (ppm) <sup>†</sup>
BASF [1979a]	Hamster	1,201	--	240	5,946	30 <sup>‡</sup>	198
BASF [1979a]	Mouse	1,278	--	240	6,327	30 <sup>‡</sup>	211
Oberly and Tansy [1985]	Rat	2,730	--	240	13,516	30 <sup>‡</sup>	451
Oberly and Tansy [1985]	Rat	--	1,652	240	8,179	10 <sup>‡</sup>	818
BASF [1979b,c; 1980]	Rat	1,936	--	240	9,585	30 <sup>‡</sup>	320

**Abbreviation:** LC – lethal concentration; LC<sub>10</sub> – concentration estimated to cause a 10% mortality rate; LC<sub>50</sub> – median lethal concentration; LC<sub>Lo</sub> – lowest concentration of a chemical that caused death in humans or animals; min – minute; ppm – parts per million

\*NAS [2007] empirically estimated n = 1.3 by combining 1- and 4- hour LC<sub>50</sub> data sets from ethyl acrylate in a 3-dimensional probit analysis. The n = 1.3 was used during all duration adjustments for n-butyl acrylate.

<sup>†</sup>The derived value is the result of the adjusted 30-minute LC value divided by the composite uncertainty factor.

<sup>‡</sup>Composite uncertainty factor to account for adjustment of LC<sub>50</sub> values to LC<sub>01</sub> values, use of lethal concentration threshold in animals, interspecies differences and human variability.

<sup>‡</sup>Composite uncertainty factor to account for lethal concentration threshold in animals, interspecies differences and human variability.

extrapolation from a threshold for escape-impairing effects in animals, animal to human differences, and human variability

External Review Draft  
March 2015

1 **Table 5: Non-lethal Concentration Data for n-Butyl Acrylate**

2

Reference	Species	NOAEL (ppm)	LOAEL (ppm)	Time (min)	Adjusted 30-min Concentration*	Composite Uncertainty Factor	Derived Value (ppm)†
Kirkpatrick [2003]‡	Mouse	--	340‡	30	340	3±	113

3  
4 **Abbreviation:** NOAEL – no observed adverse effect level; min – minute; LOAEL – lowest observed adverse effect level; ppm – parts per million

5 \*NAS [2007] empirically estimated n = 1.3 by combining 1- and 4- hour LC<sub>50</sub> data sets from ethyl acrylate in a 3-dimensional probit analysis. The n = 1.3 was used during  
6 all duration adjustments for n-butyl acrylate.

7 ‡The derived value is the result of the adjusted 30-min value divided by the composite uncertainty factor. The composite uncertainty factor used varies for each study  
8 based on the nature and severity of the endpoint observed.

9 †Identified study is the primary basis of the IDLH value for n-butyl acrylate.

10 ‡This concentration was determined to be a RD<sub>50</sub> (concentration estimated to result in a 50% depression in breathing rate).

11 ±Composite uncertainty factor to account for extrapolation from a threshold for escape-impairing effects in animals, animal to human differences, and human variability.

12

### 3.0 Human Data

No reports of human fatalities from exposure to n-butyl acrylate were found. Very little information is available concerning human exposure to n-butyl acrylate. Symptoms of irritation were occasionally reported in chemical plant workers [Tucek et al. 2002]. Dermal sensitization has been reported [BIBRA 1991], but not respiratory sensitization.

### 4.0 Summary

In the absence of adequate human data, the IDLH value is based on animal data. Although lethality data are available (see Table 4), the preferred data that serve as the basis of the IDLH value indicate respiratory depression, which is categorized as an escape-impairing effect. Kirkpatrick [2003] reported a 30-minute RD<sub>50</sub> value in mice exposed to 340 ppm. This effect is classified as potentially escape impairing. No duration adjustment was needed. Application of a composite uncertainty factor of 3 to account for extrapolation from a threshold for escape-impairing effects in animals, animal to human differences, and human variability yielded an IDLH value of **113 ppm**.

## 5.0 References

- 1  
2  
3 ACGIH (American Conference of Governmental Industrial Hygienists) [2014]. Annual TLVs® (Threshold Limit  
4 Values) and BEIs® (Biological Exposure Indices) booklet. Cincinnati, OH: ACGIH Signature Publications.  
5  
6 AIHA (American Industrial Hygiene Association) [1989]. Odor thresholds for chemicals with established  
7 occupational health standards. Fairfax, VA: American Industrial Hygiene Association, p. 14.  
8  
9 AIHA [2006]. AIHA Emergency Response Planning (ERP) Committee procedures and responsibilities. Fairfax,  
10 VA: American Industrial Hygiene Association. [[https://www.aiha.org/get-](https://www.aiha.org/get-involved/AIHAGuidelineFoundation/EmergencyResponsePlanningGuidelines/Documents/ERP-SOPs2006.pdf)  
11 [involved/AIHAGuidelineFoundation/EmergencyResponsePlanningGuidelines/Documents/ERP-SOPs2006.pdf](https://www.aiha.org/get-involved/AIHAGuidelineFoundation/EmergencyResponsePlanningGuidelines/Documents/ERP-SOPs2006.pdf)].  
12 Date accessed: March 17, 2014.  
13  
14 AIHA (American Industrial Hygiene Association) [2009]. AIHA Emergency Response Planning (ERP)  
15 Committee procedures and responsibilities. Fairfax, VA: American Industrial Hygiene Association.  
16  
17 AIHA (American Industrial Hygiene Association) [2010]. Emergency response planning guidelines (ERPG) and  
18 workplace environmental exposure levels (WEEL) handbook. Fairfax, VA: American Industrial Hygiene  
19 Association Press.  
20  
21 AIHA [2010a]. AIHA Emergency Response Planning (ERP) Committee procedures and responsibilities. Fairfax,  
22 VA: American Industrial Hygiene Association.  
23  
24 AIHA [2010b]. Emergency response planning guidelines (ERPG) and workplace environmental exposure levels  
25 (WEEL) handbook. Fairfax, VA: American Industrial Hygiene Association Press  
26  
27 BASF [1979a]. Unpublished studies (78/623). Ludwigshafen, Germany: BASF.  
28  
29 BASF [1979b]. Bericht über die bestimmung der akuten inhalationstoxizität LC50 von n-butylacrylat bie  
30 4stüdiger exposition an Sprague-Dawley-ratten (gefüttert). Ludwigshafen, Germany: BASF.  
31  
32 BASF [1979c]. Bericht über die bestimmung der akuten inhalationstoxizität LC50 von n-butylacrylat bie  
33 4stüdiger exposition an Sprague-Dawley-ratten (nüchtern). Ludwigshafen, Germany: BASF.  
34  
35 BASF [1980]. Bestimmung der akuten inhalationstoxizität LC50 von butylacrylat als dampf bie 4stüdiger  
36 exposition an Sprague-Dawley-ratten. Ludwigshafen, Germany: BASF.  
37  
38 BIBRA [1991]. Toxicity profile n-butyl acrylate. Surrey, UK: BIBRA International, Ltd.  
39  
40 Engelhardt G, Klimisch H-J [1983]. n-Butyl acrylate: cytogenetic investigation in the bone marrow of Chinese  
41 hamsters and rats after 4-day inhalation. *Fundam Appl Toxicol* 3:640–641.  
42  
43 HSDB (Hazardous Substances Data Bank) [2014]. [<http://toxnet.nlm.nih.gov/cgi-bin/sis/htmlgen?HSDB>]. Date  
44 accessed: March 17, 2014.  
45  
46 IFA (Institut für Arbeitsschutz der Deutschen Gesetzlichen Unfallversicherung) [2014]. GESTIS: database on  
47 hazardous substances.

**External Review Draft  
March 2015**

- 1 [http://gestis-en.itrust.de/nxt/gateway.dll?f=templates&fn=default.htm&vid=gestiseng:sdbeng]. Date accessed:  
2 March 17, 2014.  
3  
4
- 5 Kirkpatrick DT [2003]. Airway irritation/respiratory depression (RD50) study of butyl acrylate in albino mice.  
6 Ashland, OH: WIL Research Laboratories, Inc. Study No. WIL-496001. p. 74.  
7
- 8 NAS (National Academy of Science) [2001]. Standing operating procedures for developing Acute Exposure  
9 Guidelines Levels for hazardous chemicals. NAS, National Research Council (NRC), Committee on Toxicology,  
10 Subcommittee on Acute Exposure Guideline Levels. National Academy Press: Washington, DC. ISBN: 0-309-  
11 07553-X. [http://www.epa.gov/oppt/aegl/pubs/sop.pdf]. Date accessed: March 17, 2014.  
12
- 13 NAS (National Academies of Science) [2007]. Acute Exposure Guideline Levels (AEGs) for selected airborne  
14 chemicals. Butyl acrylate (CAS Reg. No. 141-32-2). NAS, National Research Council, Committee on  
15 Toxicology, Subcommittee on Acute Exposure Guideline Levels National Academy Press: Washington, DC.  
16 [http://www.epa.gov/oppt/aegl/pubs/rest118.htm]. Data accessed: August 1, 2014.  
17
- 18 NIOSH [2004]. NIOSH respirator selection logic. Cincinnati, OH: U.S. Department of Health and Human  
19 Services, Centers for Disease Control and Prevention, National Institute for Occupational Safety and Health,  
20 DHHS (NIOSH) Publication No. 2005-100. [http://www.cdc.gov/niosh/docs/2005-100/pdfs/2005-100.pdf]. Date  
21 accessed: March 17, 2014.  
22
- 23 NIOSH [2013]. NIOSH Current Intelligence Bulletin 66: Derivation of Immediately Dangerous to Life or Health  
24 (IDLH) Values. Cincinnati, OH: U.S. Department of Health and Human Services, Centers for Disease Control  
25 and Prevention, National Institute for Occupational Safety and Health, DHHS (NIOSH) Publication No. 2014-  
26 100.  
27 [http://www.cdc.gov/niosh/docs/2014-100/pdfs/2014-100.pdf]. Date accessed: March 17, 2014.  
28
- 29 NIOSH [2014]. NIOSH pocket guide to chemical hazards. Cincinnati, OH: U.S. Department of Health and  
30 Human Services, Centers for Disease Control and Prevention, National Institute for Occupational Safety and  
31 Health, DHHS (NIOSH) Publication No. 2005-149. [http://www.cdc.gov/niosh/npq/]. Date accessed: March 17,  
32 2014.  
33
- 34 NLM (National Library of Medicine) [2014]. ChemIDplus lite [http://chem.sis.nlm.nih.gov/chemidplus/]. Date  
35 accessed: August 1, 2014.  
36
- 37 Oberly R, Tansy MF [1985]. LC50 values for rats acutely exposed to vapors of acrylic and methacrylic acid  
38 esters. *J Toxicol Environ Health* 16:811–822.  
39
- 40 OSHA (Occupational Safety and Health Administration) [2014]. Occupational Safety and Health Standards. 29  
41 CFR 1910. Subpart Z -- Toxic and Hazardous Substances. OSHA; Washington, DC  
42 [http://www.osha.gov/pls/oshaweb/owadisp.show\_document?p\_table=standards&p\_id=9992]. Date accessed:  
43 August 1, 2014.

**External Review Draft  
March 2015**

- 1  
2 ten Berge WF, Zwart A, Appelman LM [1986]. Concentration-time mortality response relationship of irritant and  
3 systematically acting vapours and gases. *J Haz Mat* 13:301–309.  
4  
5 Tucek M, Tenglerová J, Kvasnicková M, Maxa K, Mohyluk I, Svandová E, Topolcan O, Vlasák Z, Cikrt M  
6 [2002]. Effect of acrylate chemistry on human health. *Int Arch Occup Environ Health* 75(Suppl):S67–S72.  
7  
8 USEPA (U.S. Environmental Protection Agency) [2014]. Integrated Risk Information System (IRIS).  
9 [<http://www.epa.gov/IRIS/>]. Date accessed: March 17, 2014.

DRAFT - DO NOT DISTRIBUTE OR CITE