



# ORAU TEAM Dose Reconstruction Project for NIOSH

Oak Ridge Associated Universities | Dade Moeller & Associates | MJW Corporation

Page 1 of 105

DOE Review Release 04/30/2009

<b>Document Title:</b> <b>Mound Site – Occupational Environmental Dose</b>		<b>Document Number:</b> ORAUT-TKBS-0016-4 <b>Revision:</b> 00 PC-1 <b>Effective Date:</b> 03/13/2009 <b>Type of Document:</b> TBD <b>Supersedes:</b> Revision 00
<b>Subject Expert(s):</b> Robert Hysong, Richard Orthen, Anita Mucha, and Andrew Lombardo  <b>Site Expert(s):</b> N/A		
<b>Approval:</b>	<u>Signature on File</u> Donald N. Stewart, Document Owner	<b>Approval Date:</b> <u>03/04/2009</u>
<b>Concurrence:</b>	<u>Signature on File</u> John M. Byrne, Task 3 Manager	<b>Concurrence Date:</b> <u>03/04/2009</u>
<b>Concurrence:</b>	<u>Signature on File</u> Edward F. Maher, Task 5 Manager	<b>Concurrence Date:</b> <u>03/04/2009</u>
<b>Concurrence:</b>	<u>Signature on File</u> Kate Kimpan, Project Director	<b>Concurrence Date:</b> <u>03/11/2009</u>
<b>Approval:</b>	<u>Signature on File</u> James W. Neton, Associate Director for Science	<b>Approval Date:</b> <u>03/13/2009</u>

New     
  Total Rewrite     
  Revision     
  Page Change

**FOR DOCUMENTS MARKED AS A TOTAL REWRITE, REVISION, OR PAGE CHANGE, REPLACE THE PRIOR REVISION AND DISCARD / DESTROY ALL COPIES OF THE PRIOR REVISION.**

**PUBLICATION RECORD**

<b>EFFECTIVE DATE</b>	<b>REVISION NUMBER</b>	<b>DESCRIPTION</b>
10/06/2004	00	First approved issue. Initiated by Jeffrey S. Vollmer.
03/13/2009	00 PC-1	Approved page change initiated to remove information pertaining to Monsanto Chemical Company, the subject of a class of employees added to the Special Exposure Cohort. The changes necessitated the reordering and renumbering of tables on the following pages: 9, 10, 12 - 34 in Sections 4.2 and 4.3. NIOSH required language was revised on pages 7 and 8 in Section 4.1. Updated NIOSH reference on page 48. No sections were deleted. Incorporates formal internal and NIOSH review comments. Training required: As determined by the Task Manager. Initiated by Donald N. Stewart.

## TABLE OF CONTENTS

<u>SECTION</u>	<u>TITLE</u>	<u>PAGE</u>
Acronyms and Abbreviations .....		6
4.1	Introduction .....	7
	4.1.1 Purpose.....	8
	4.1.2 Scope.....	8
4.2	Mound Laboratory.....	8
	4.2.1 Environmental Air Monitoring.....	11
	4.2.2 Effluent Intake Concentrations.....	17
	4.2.3 Mound Effluent Inhalation Intakes.....	19
	4.2.3.1 Site-Wide Annual Median Effluent Radionuclide Inhalation Intakes.....	19
	4.2.3.2 Site-Wide Maximum Annual Average Effluent Inhalation Intakes .....	19
	4.2.4 Annual Effluent Submersion External Exposures.....	23
	4.2.5 Resuspension Intakes, Submersion External Exposures, and Ground Layer External Exposures Attributed to Soil Contamination .....	24
	4.2.6 Direct External Exposure From Facilities .....	33
4.3	Uncertainties.....	33
References.....		35
Glossary .....		49
ATTACHMENT A, DOSE COEFFICIENTS.....		51
ATTACHMENT B, MOUND OFFSITE ENVIRONMENTAL AIR-SAMPLING DATA FOR 1948 TO SEPTEMBER 1959.....		52
ATTACHMENT C, MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1959 TO 1972.....		59
ATTACHMENT D, MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001 .....		68

## LIST OF TABLES

<u>TABLE</u>	<u>TITLE</u>	<u>PAGE</u>
4-1	Significant Mound Laboratory programs and events.....	10
4-2	Site-wide annual median effluent intake concentrations by radionuclide .....	13
4-3	SRS plutonium dioxide feed material and Mound scaling factors .....	14
4-4	Pu-238: <sup>239</sup> , <sup>240</sup> Pu activity concentration ratios inferred from measurements of environmental air samples taken at Mound .....	15
4-5	SRS plutonium dioxide feed material relative dose contribution .....	15
4-6	Total Mound site radioactive effluent discharges, 1949–1983 .....	16
4-7	Inferred onsite dispersion factors by radionuclide, 1973–1983 .....	17
4-8	Ratio of initial to final air sample counts from Ra-Ac program areas.....	19
4-9	Site-wide annual median effluent inhalation intakes at Mound .....	20
4-10	Inferred maximum onsite dispersion factors by radionuclide, 1983–1973.....	21
4-11	Site-wide maximum annual intakes at Mound .....	21
4-12	Geometric standard deviation for effluent intakes at Mound .....	22
4-13	Annual average effluent submersion external exposures at Mound by year and radionuclide .....	25
4-14	Annual average ground layer external exposure, resuspension submersion external exposure, and resuspension submersion intake at Mound by radionuclide, 1990 to present.....	26
4-15	Annual average ground layer external exposure, resuspension submersion external exposure, and resuspension submersion intake at Mound by radionuclide, 1980 through 1989 .....	27
4-16	Annual average ground layer external exposure, resuspension submersion external exposure, and resuspension submersion intake at Mound by radionuclide, 1970 through 1979 .....	28
4-17	Annual average ground layer external exposure, resuspension submersion external exposure, and resuspension submersion intake at Mound by radionuclide, 1960 through 1969 .....	29
4-18	Annual average ground layer external exposure, resuspension submersion external exposure, and resuspension submersion intake at Mound by radionuclide, 1950 through 1959 .....	30
4-19	Annual average ground layer external exposure, resuspension submersion external exposure, and resuspension submersion intake at Mound by radionuclide, 1949 .....	31
4-20	Mean and maximum environmental external radiation levels at Mound by year.....	32
4-21	Radionuclide releases to the atmosphere from Mound 1949 to 1973 .....	34
A-1	Dose coefficients for contaminated soil to an infinite depth .....	51
A-2	Dose coefficients for air submersion .....	51
B-1	Mound offsite air-sampling data for 1948 to 1959.....	53
C-1	Mound offsite air-monitoring data for 1959 .....	60
C-2	Mound offsite air-monitoring data for 1960 .....	60
C-3	Mound offsite air-monitoring data for 1961 .....	60
C-4	Mound offsite air-monitoring data for 1962 .....	61
C-5	Mound offsite air-monitoring data for January–June 1963.....	61
C-6	Mound offsite air-monitoring data for 1964 .....	61
C-7	Mound offsite air-monitoring data for 1965 .....	62
C-8	Mound offsite air-monitoring data for 1966 .....	62
C-9	Mound offsite air-monitoring data for 1967 .....	63
C-10	Mound offsite air-monitoring data for 1968 .....	64

C-11	Mound offsite air-monitoring data for 1969 .....	65
C-12	Mound offsite air-monitoring data for 1970 .....	66
C-13	Mound air-monitoring data for 1971 .....	66
C-14	Mound air-monitoring data for 1972 .....	67
D-1	Mound air-monitoring data for 1973 .....	69
D-2	Mound air-monitoring data for 1974 .....	70
D-3	Mound air-monitoring data for 1975 .....	71
D-4	Mound air-monitoring data for 1976 .....	72
D-5	Mound air-monitoring data for 1977 .....	73
D-6	Mound air-monitoring data for 1978 .....	74
D-7	Mound air-monitoring data for 1979 .....	75
D-8	Mound air-monitoring data for 1980 .....	76
D-9	Mound air-monitoring data for 1981 .....	77
D-10	Mound air-monitoring data for 1982 .....	78
D-11	Mound air-monitoring data for 1983 .....	79
D-12	Mound air-monitoring data for 1984 .....	80
D-13	Mound air-monitoring data for 1985 .....	81
D-14	Mound air-monitoring data for 1986 .....	82
D-15	Mound air-monitoring data for 1987 .....	83
D-16	Mound air-monitoring data for 1988 .....	84
D-17	Mound air-monitoring data for 1989 .....	85
D-18	Mound air-monitoring data for 1990 .....	86
D-19	Mound air-monitoring data for 1991 .....	87
D-20	Mound air-monitoring data for 1992 .....	88
D-21	Mound air-monitoring data for 1993 .....	89
D-22	Mound air-monitoring data for 1994 .....	90
D-23	Mound air-monitoring data for 1995 .....	91
D-24	Mound air-monitoring data for 1996 .....	92
D-25	Mound air-monitoring data for 1997 .....	94
D-26	Mound air-monitoring data for 1998 .....	96
D-27	Mound air-monitoring data for 1999 .....	98
D-28	Mound air-monitoring data for 2000 .....	100
D-29	Mound air-monitoring data for 2001 .....	102
D-30	Mound air-monitoring data for 2002 .....	104

### LIST OF FIGURES

<u>FIGURE</u>	<u>TITLE</u>	<u>PAGE</u>
4-1	Mound onsite airborne radioactivity monitoring locations .....	12
4-2	Mound offsite airborne radioactivity monitoring locations .....	13

**ACRONYMS AND ABBREVIATIONS**

Bq	Becquerel
Ci	curie
cm	centimeter
cm <sup>2</sup>	square centimeter
cpm	counts per minute
cSv	centiseivert
DCF	dose conversion factor
DOE	U.S. Department of Energy
dpm	disintegrations per minute
EEOICPA	Energy Employees Occupational Illness Compensation Program Act of 2000
g	gram
GPHS	General Purpose Heat Source
GSD	Geometric Standard Deviation
HISS	Hydrogen Isotope Separations System
hr	hour
HTO	tritiated water vapor
LLW	low-level radioactive waste
m	meter
m <sup>2</sup>	square meter
m <sup>3</sup>	cubic meter
mCi	millicurie
MED	Manhattan Engineering District
ml	milliliter
mrem	millirem
NIOSH	National Institute for Occupational Safety and Health
pCi	picocurie
RTG	radioisotope thermoelectric generator
S	seconds
SNM	special nuclear material
SRS	Savannah River Site
Sv	sievert
TBD	technical basis document
TERF	Tritium Emission Recovery Facility
TRU	transuranic
μCi	microcurie
μg	microgram
U.S.C.	United States Code
WSF	Waste Staging Facility
yr	year

## 4.1 INTRODUCTION

Technical basis documents and site profile documents are not official determinations made by the National Institute for Occupational Safety and Health (NIOSH) but are rather general working documents that provide historic background information and guidance to assist in the preparation of dose reconstructions at particular sites or categories of sites. They will be revised in the event additional relevant information is obtained about the affected site(s). These documents may be used to assist NIOSH staff in the completion of the individual work required for each dose reconstruction.

In this document the word “facility” is used as a general term for an area, building, or group of buildings that served a specific purpose at a site. It does not necessarily connote an “atomic weapons employer facility” or a “Department of Energy [DOE] facility” as defined in the Energy Employees Occupational Illness Compensation Program Act [EEOICPA; 42 U.S.C. § 7384l(5) and (12)]. EEOICPA defines a DOE facility as “any building, structure, or premise, including the grounds upon which such building, structure, or premise is located ... in which operations are, or have been, conducted by, or on behalf of, the Department of Energy (except for buildings, structures, premises, grounds, or operations ... pertaining to the Naval Nuclear Propulsion Program)” [42 U.S.C. § 7384l(12)]. Accordingly, except for the exclusion for the Naval Nuclear Propulsion Program noted above, any facility that performs or performed DOE operations of any nature whatsoever is a DOE facility encompassed by EEOICPA.

For employees of DOE or its contractors with cancer, the DOE facility definition only determines eligibility for a dose reconstruction, which is a prerequisite to a compensation decision (except for members of the Special Exposure Cohort). The compensation decision for cancer claimants is based on a section of the statute entitled “Exposure in the Performance of Duty.” That provision [42 U.S.C. § 7384n(b)] says that an individual with cancer “shall be determined to have sustained that cancer in the performance of duty for purposes of the compensation program if, and only if, the cancer ... was at least as likely as not related to employment at the facility [where the employee worked], as determined in accordance with the POC [probability of causation<sup>1</sup>] guidelines established under subsection (c) ...” [42 U.S.C. § 7384n(b)]. Neither the statute nor the probability of causation guidelines (nor the dose reconstruction regulation, 42 C.F.R. Pt. 82) define “performance of duty” for DOE employees with a covered cancer or restrict the “duty” to nuclear weapons work (NIOSH 2007).

The statute also includes a definition of a DOE facility that excludes “buildings, structures, premises, grounds, or operations covered by Executive Order No. 12344, dated February 1, 1982 (42 U.S.C. 7158 note), pertaining to the Naval Nuclear Propulsion Program” [42 U.S.C. § 7384l(12)]. While this definition excludes Naval Nuclear Propulsion Facilities from being covered under the Act, the section of EEOICPA that deals with the compensation decision for covered employees with cancer [i.e., 42 U.S.C. § 7384n(b), entitled “Exposure in the Performance of Duty”] does not contain such an exclusion. Therefore, the statute requires NIOSH to include all occupationally-derived radiation exposures at covered facilities in its dose reconstructions for employees at DOE facilities, including radiation exposures related to the Naval Nuclear Propulsion Program. As a result, all internal and external occupational radiation exposures are considered valid for inclusion in a dose reconstruction. No efforts are made to determine the eligibility of any fraction of total measured exposure for inclusion in dose reconstruction. NIOSH, however, does not consider the following exposures to be occupationally derived (NIOSH 2007):

- Background radiation, including radiation from naturally occurring radon present in conventional structures

---

<sup>1</sup> The U.S. Department of Labor (DOL) is ultimately responsible under the EEOICPA for determining the POC.

- Radiation from X-rays received in the diagnosis of injuries or illnesses or for therapeutic reasons

#### 4.1.1 **Purpose**

The occupational environmental dose is the dose received by workers on the job, but outside the operational buildings at the Mound Laboratory. Annual inhalation intakes of radioactive material at Mound Laboratory have been estimated based on the onsite environmental air monitoring station results from 1971 through 2003. For years in which onsite air monitoring data were unavailable (prior to 1971) and total Mound stack effluent data was available, empirically derived onsite atmospheric dispersion factors (plutonium, polonium particulates, and hydrogen gas/vapor  $\chi/Qs$ ) were used to estimate the intake air concentration. The  $\chi/Q$  derivation coupled the site-wide median air concentration ( $^{238}\text{Pu}$ ,  $^{210}\text{Po}$ , and  $^3\text{H}$  concentration) with the corresponding total Mound effluent source term for the period from 1973 through 1983. Ingestion intakes and ambient external dose were estimated using radionuclide concentrations measured in 30-cm-thick soil samples at Mound Laboratory.

#### 4.1.2 **Scope**

Sections 4.1 and 4.2 discuss reconstruction of dose for unmonitored environmental exposures at Mound Laboratory. Section 4.3 discusses uncertainties for this analysis.

### 4.2 **MOUND LABORATORY**

Mound Laboratory was an integrated research, development, and production facility performing work in support of U.S. Department of Energy (DOE) weapon and nonweapon programs with emphasis on chemical explosives and nuclear technology. The organization that would later operate the Mound Laboratory originated as a technical organization in 1943 when the Federal Government requested Monsanto Chemical Company to accept responsibility for determining the chemical and metallurgical properties of polonium as a project of the Manhattan Engineering District (MED). Work occurred at Monsanto's Central Research Department and several satellite units in the Dayton, Ohio, area. Late in 1945, the MED determined that the research, development, and production organization at Dayton should become a permanent facility. A search for a suitable location in early 1946 led to the selection of a 728,000-m<sup>2</sup> (182-acre) tract adjacent to Miamisburg, Ohio, about 16 km (10 miles) south-southwest of Dayton. The facility is surrounded by residential and recreational properties as well as agricultural areas and sits atop an elevated area overlooking Miamisburg, the Great Miami River, and the river plain area to the west. In 1981, DOE purchased an additional 123 acres of land south of the original 182 acres for unrealized mission expansion. This parcel was never developed.

Construction of Mound Laboratory began in February 1947 and ended in 1949. In late 1948, work at the Dayton Units moved to the Mound site. The following paragraphs describe key Mound facilities and their historic functions (DOE 1999; Monsanto 1975a, DOE 1993b).

#### **Semi-Works (SW/R) Tritium Complex**

This two-story facility was used primarily for handling tritium. Four major operations occurred in the SW/R Tritium Complex: component development, component evaluation operations, tritium recovery, and materials analysis. SW/R, which was built in 1950, underwent 13 major additions. One corridor of rooms in the adjacent building, Research (R), was converted to tritium operations; this corridor, together with the SW building and Building 58, formed the SW/R complex. While the complex was primarily a tritium facility, there were three additional areas. From 1951 through 1953 Mound intermittently conducted a research and development program to recover  $^{227}\text{Ac}$  and  $^{228}\text{Th}$  from neutron irradiated  $^{226}\text{Ra}$  (EG&G 1995a). The three parent radionuclides of  $^{227}\text{Ac}$ ,  $^{226}\text{Ra}$  and  $^{228}\text{Th}$  and their radioactive progeny were present in the irradiated material. The recovery operation was conducted in



a special shielded process facility referred to as the old cave (room SW-19) on the east side of the building. From 1951 to 1953 work in the cave resulted in the release of  $1.6 \text{ E}+05 \text{ uCi}$  of  $^{227}\text{Ac}$ ,  $^{226}\text{Ra}$ ,  $^{228}\text{Th}$  and their radioactive progeny (Story 1973). From 1964 to 1968, purified  $^{227}\text{Ac}$  in oxide and nitrate forms was processed in a hot cell and analytical lab area (Room SW-140) in the SW Building (EG&G 1995a). This work resulted in the release of  $5.3 \text{ uCi}$  of  $^{227}\text{Ac}$  to the atmosphere (Storey 1973). This facility has been demolished.

### **Technical (T) Building**

The T Building was operational in 1949 and was originally used to purify  $^{210}\text{Po}$  for use in nuclear weapon initiators. Decontamination work was done from 1971 through 1974 on the  $^{210}\text{Po}$  processing areas. Its last mission was to support tritium programs for reconfiguration, safe shutdown, and remaining operations. The facility has also been used to extract radionuclides, to house the plutonium verification facility, and to store transuranic (TRU) materials. Since 1980, KYLE (classified), Tritium Emission Recovery Facility (TERF), Hydrogen Isotope Separations System (HISS), and other tritium facilities large enough to handle multikilogram quantities were added to T Building. Special nuclear material (SNM), primarily  $^{239}\text{Pu}$ , was stored in T-Building storage areas A and B prior to transfer to Building 38 for repackaging. The SNM was in the form of metal, metal oxide, residue, and/or combinations thereof; these materials were contained in sealed drums and other metal containers.

### **Building 38**

Building 38 was originally designed to be a radiochemical processing facility for  $^{238}\text{Pu}$ , used in the oxide form as fuel for radioisotope thermoelectric generators (RTGs). Building design began in 1965, and construction was complete in December 1967. Assembly and disassembly associated with manufacturing  $^{238}\text{Pu}$  heat source modules for RTGs were the primary operations conducted in Building 38. Other programs included assembly of three types of heat sources and two types of RTGs and general-purpose radionuclide handling. RTG and heat source assembly and disassembly, which were supported in the F-line operations, involved the 5-watt, High Power Generator Mod 3 and General Purpose Heat Sources (GPHS) programs.

### **Building 50**

Building 50 was an RTG assembly and test laboratory. Encapsulated  $^{238}\text{Pu}$  fuel was loaded into graphite assemblies in Building 38 and welded into stainless-steel containers. The containers were transferred to Building 50 for fuel reduction and subsequent installation in electrical converters.

### **Building 22, Waste Staging Facility**

The Waste Staging Facility (WSF) provides storage and staging for solid low-level radioactive waste (LLW) containers prior to offsite shipment. The facility can store as many as 186 metal boxes, stage lined and unlined 30- or 55-gallon metal drums with or without overpack, and stage closed wooden boxes that contain LLW. Transition to the WSF was complete in June 1995. Building 22, built in 1967, previously housed a property management warehouse, office spaces, and a test facility for glovebox operations.

### **Building 72**

Building 72 is used to store miscellaneous hazardous wastes until they can be shipped off the site for disposal. The wastes are in steel drums, plastic drums, plastic and steel containers of various sizes, and gas cylinders. In addition, waste sampling, packaging, and repackaging of some wastes; drum over packing; and container inspection and marking occur in this facility. Building 72 is a steel-framed building with metal panel siding on three walls.

Table 4-1 lists significant programs and events that occurred at the Mound site that are potentially relevant to dose reconstruction.

Table 4-1. Significant Mound Laboratory programs and events.<sup>a</sup>

1946	Mound Laboratory planning started.
1948	Mound Laboratory occupied.
1949	Polonium operations moved from Dayton Units to Mound Laboratory.
1950	Separation of Po-208 and Po-209 from proton (accelerator) irradiation of bismuth. Separation of Ac-227 from irradiated Ra-226 in the SW 19 (old cave). Uranyl sulfate – heavy water fuel system research. Civilian power reactor research involving uranium, Pa-231, and Pu-239; mission ended in 1963.
1954	Invention of Po-210-fueled thermoelectric generator. Tritium studies began in 1954 with the first of several programs requiring tritium-handling technology starting in 1958. There were facilities for the recovery and purification of tritium from all types of wastes generated at DOE sites that handled tritium. Construction of thorium refinery for breeder reactor program; refinery never operated. In late 1954, Mound Laboratory received 400 tons of thorium ( <sup>232</sup> Th) sludge from Brazilian ore residues, which was subsequently stored outdoors in 55-gallon drums.
1955	Repackaging of 6,000 55-gallon drums containing thorium ore and sludge occurred through 1965 at three different times to help prevent possibility of further contamination. In 1964, the thorium sludge was transferred to a special building for storage. Early in 1975, the thorium ore residues were removed from Mound and sold to a commercial organization.
1956	Completed separation of 1.3 grams of Pa-231 in Building HH. Weighable quantities of Th-230 (ionium) separated. <sup>239</sup> PuBe neutron sources manufactured. Nuclear weapon detonator development, production, and surveillance; mission ended in 1989.
1959	Pu-239 reactor fuels laboratory operational. Tritium waste recovery and purification facility operational.
1960	The first reduction of metallic Pu-238 was achieved in the spring of 1960.
1961	Pu-238 production started and Development of Pu-238 heat sources for thermoelectric generators.
1965	Gaseous effluent control system operational in SW Building.
1966	Thorium ore and sludge moved to bulk storage in Building 21.
1968	PP Building 38 operational for processing Pu-238.
1969	Waste line break and subsequent contamination of abandoned Miami-Erie Canal bed with Pu-238. Began tritium recycling from retired weapon parts.
1972	Tritium effluent control project began. Nonweapons polonium work terminated.
1974	Thorium ore and sludge completely removed from site. Po-210 decontamination of T Building completed.
1975	Pu-238 recovery operations terminated.
1977	Californium Multiplier Neutron Radiography Facility installed.
1989	Removal of soil contaminated with uranium near Building 34.
1990	Pu-238 decontamination of inactive laboratories in Research (R) Building.
1991	Removal of Pu-238-contaminated waste line connecting HH Building with WD facility.
1993	DOE decision to transfer defense mission from Mound. Pu-238 decontamination of PP Building 38 and Acid Leach Field (Area D).
1994	Demolition of SM Building structure contaminated with Pu-238.
1995	All weapon components production terminated.
1996	Demolition of SD Building (sanitary waste treatment facility) and Building 21 (thorium ore and sludge bulk storage facility), including excavation of contaminated soil. Miami-Erie Canal removal action (Pu-238-contaminated sediments) fieldwork begins in October.
1997	Removal of soil contaminated with Ac-227 at Area 7.
1998	Miami-Erie Canal removal action fieldwork completed; approximately 30,000 yd <sup>3</sup> removed for offsite disposal.

a. Adapted from DOE 1993b, DOE 1999 and EPA 2003.

Most early programs were concerned with <sup>210</sup>Po and its applications, particularly the fabrication of neutron and alpha sources for weapon and nonweapon use. From 1950 to 1963, laboratory investigations of uranium, <sup>231</sup>Pa, and <sup>239</sup>Pu were part of the national civilian power reactor program.

Separation of stable isotopes of noble gases began in 1954. Also in 1954, Mound scientists invented the thermoelectric generator fueled with <sup>210</sup>Po. A limited amount of research and development work

with  $^{239}\text{Pu}$  in gram quantities began in 1955. In 1957, Mound Laboratory began the development, production, and surveillance of detonators for military applications. Beginning in 1959,  $^{238}\text{Pu}$  in quantities up to a kilogram was used in research, development, and production operations; however, the *Summary of Environmental Monitoring Report for 1959 and First Quarter 1960*, states that “during the year 1959, a year of transition, the alpha emitting isotope that would have contributed to environmental background was polonium” (Monsanto, 1960).

From 1959 to 1960, the initial plutonium program activities were conducted in R Building. During this early phase, the program consisted of research and development efforts to understand the chemistry and metallurgy of  $^{238}\text{Pu}$ . The thermal hazards as well as the chemical reactivity and containment of plutonium during processing and fabrication led to major safety concerns.

In 1960, the SM Building was constructed to provide both the technical and safety related features that were absent in the R Building. The elevated emissions of plutonium (see section 4.2.2) in 1960 were due to R Building operations. The SM Building became operational in 1961 and emissions of plutonium decreased significantly (see section 4.2.2). In 1967, Building 38 (also known as the PP Building) and an annex on the WD Building were constructed to take over the increased plutonium program demands. The SM Building processes and fabrication operations were transferred to the new Building 38 facility.

The total quantity of  $^{238}\text{Pu}$  used in operations at Mound Laboratory was sharply reduced in June 1977. Encapsulation of  $^{238}\text{Pu}$  for the large heat sources (containing in some cases more than 4 kilograms of this material) was terminated. In late 1979, Mound ended production of plutonium oxide feedstock for heat sources, and began receiving this material already in primary encapsulation.

#### **4.2.1 Environmental Air Monitoring**

Mound Laboratory had various environmental air-monitoring programs through most of its history, starting in 1948 and continuing to the present. Gross alpha, tritiated water vapor (HTO),  $^{210}\text{Po}$ ,  $^{238}\text{Pu}$ ,  $^{239, 240}\text{Pu}$ ,  $^{228}\text{Th}$ ,  $^{230}\text{Th}$ , and  $^{232}\text{Th}$  measurements occurred during these years, although not all measurements were collected in any given year. The tables in Attachments B, C, and D list environmental air-monitoring data from 1948 to September 1959, 1959 to 1972, and 1973 to 2001, respectively, along with references for the data.

From 1948 to 1959, air monitoring consisted of offsite, downwind air samples taken at unspecified locations and counted for gross alpha radiation. From 1960 to 1966, Mound conducted roving air sampler measurements of gross alpha activity obtained by truck-mounted equipment driven over a planned route in areas adjacent to the Mound site. From 1967 to 1971, Mound monitored concentrations of HTO,  $^{238}\text{Pu}$ , and  $^{210}\text{Po}$  off the site. Available data do not contain onsite air-sampling data for these three periods (with the exception of 1971, when “Site Center, Southern and Northern Perimeter” data was acquired). The usefulness of the offsite data prior to 1971 is limited, because the air samples were not collected in one location around the clock. Therefore, it is not certain whether the offsite concentrations reflect a maximum or even average concentration. Consequently, the offsite data cannot be used to infer onsite airborne radionuclide concentrations.

A program to acquire onsite meteorological data began in 1972 (Monsanto 1976a). The average onsite wind speed was approximately 8 mph (13 km/h) and the predominant wind direction was from the southwest. From 1972 to 2002, air-monitoring data was obtained from a network of both onsite (Figure 4-1) and offsite (Figure 4-2) stationary air samplers. This analysis used the site-wide median air concentration from the annual average onsite air monitoring station results to determine intake concentrations from 1971 through 2003 (See Tables C-13, C-14, and D-1 through D-29). For years in which onsite air monitoring data were unavailable (prior to 1971) and effluent data was available, empirically derived onsite atmospheric dispersion factors (plutonium, polonium particulates, and

hydrogen gas/vapor  $\chi/Q_s$ ) were used to estimate the intake air concentration. Table 4-2 summarizes the annual, median effluent air concentrations used to derive intakes for dose reconstruction. Subsequent sections discuss the intakes estimated from these data and effluent release monitoring data.

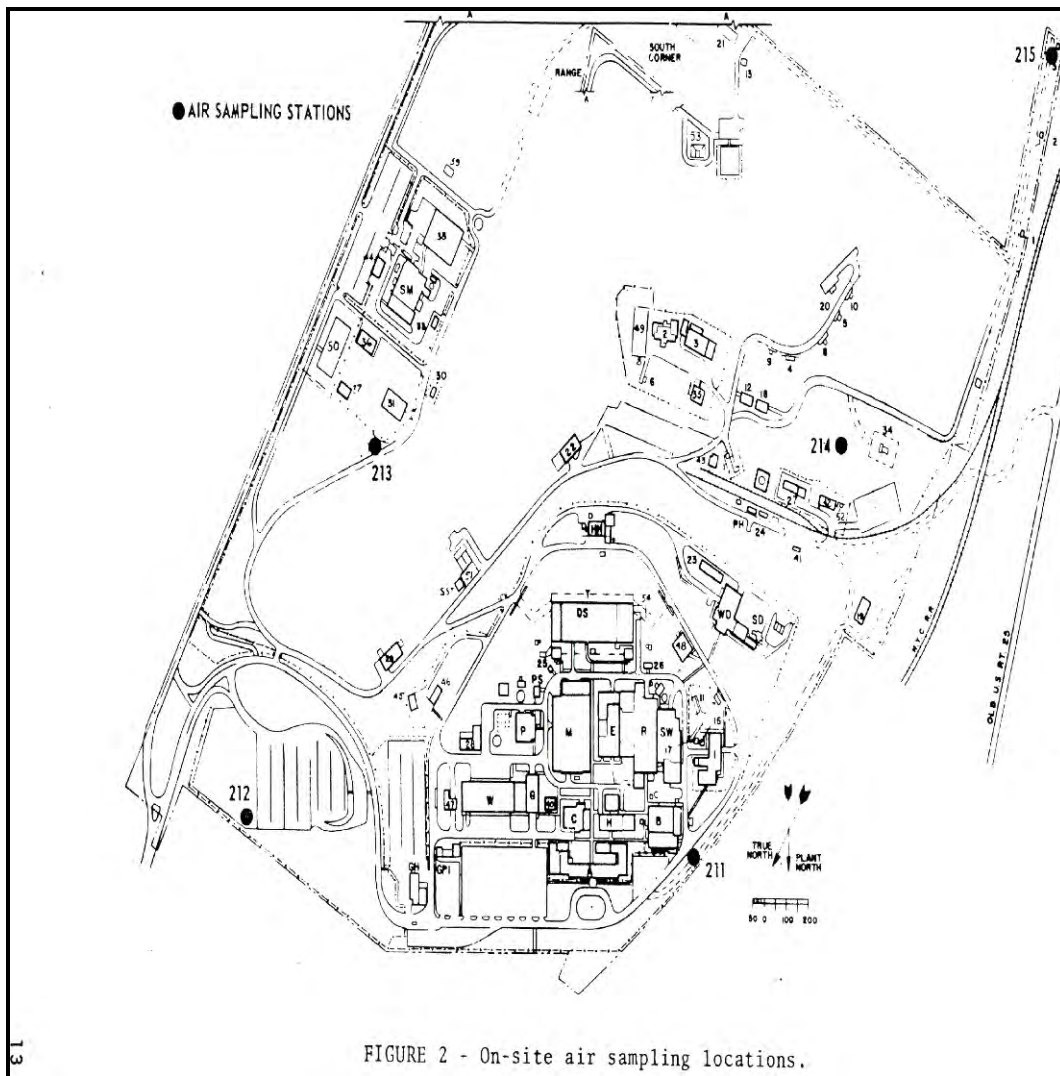


FIGURE 2 - On-site air sampling locations.

Figure 4-1. Mound onsite airborne radioactivity monitoring locations.

Some of the environmental air monitoring station results (See Tables C-13, C-14, and D-1 through D-30) were reported as “incremental” to reflect that the measured “environmental level” concentration at the control (28 miles upwind) location was subtracted from the concentration at the monitoring stations. Consequently, whenever nonincremental concentration results were reported, the contribution from control location No. 119 was subtracted from the site-wide median results. For all years in which on-site environmental air-monitoring data were available, the median concentration from the onsite annual average monitoring station results was selected to assign radionuclide intakes. For years in which onsite air monitoring data were unavailable (prior to 1971) and effluent data was available, empirically derived onsite atmospheric dispersion factors (plutonium, polonium particulates, and hydrogen gas/vapor  $\chi/Q_s$ ) were used to estimate the onsite intake air concentration.

In 1997 Mound Laboratory added  $^{232}\text{Th}$ ,  $^{230}\text{Th}$  and  $^{228}\text{Th}$  to the environmental air filter analyses conducted as part of the routine environmental air monitoring program in support of several D&D projects involving thorium contaminated soil and structures. Although these radionuclides are not

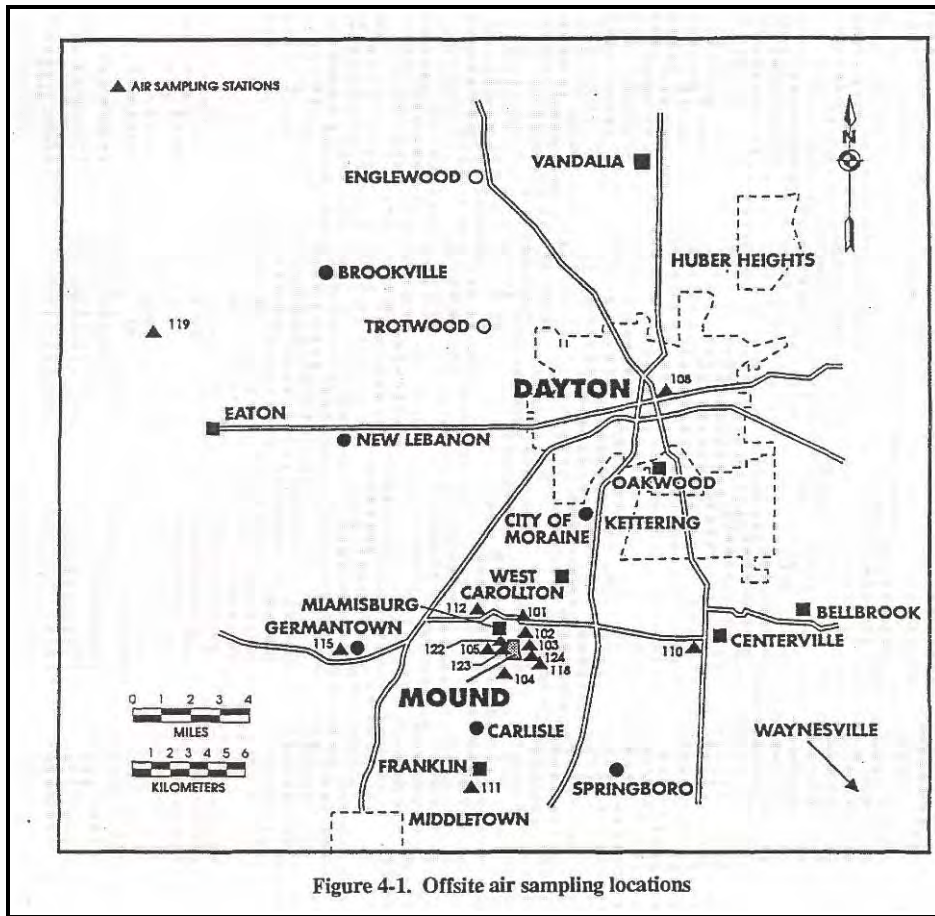


Figure 4-1. Offsite air sampling locations

Figure 4-2. Mound offsite airborne radioactivity monitoring locations.

Table 4-2. Site-wide annual median effluent intake concentrations by radionuclide ( $\mu\text{Ci ml}^{-1}$ ).

Year	<sup>238</sup> Pu	<sup>210</sup> Po	HTO	<sup>239,240</sup> Pu	<sup>232</sup> Th	<sup>230</sup> Th	<sup>228</sup> Th	<sup>226</sup> Ra	<sup>227</sup> Ac
2003	--	--	--	--	--	--	--	--	--
2002	3.76E-18	--	3.50E-12	1.90E-19	0.00E+00	0.00E+00	0.00E+00	--	--
2001	4.01E-18	--	4.83E-12	3.00E-20	2.25E-18	3.04E-18	3.79E-18	--	--
2000	4.08E-18	--	2.28E-12	1.70E-19	2.91E-18	4.12E-18	3.71E-18	--	--
1999	1.43E-18	--	8.45E-12	1.50E-19	4.42E-18	4.41E-18	4.60E-18	--	--
1998	5.11E-18	--	1.01E-11	7.00E-20	1.80E-19	0.00E+00	0.00E+00	--	--
1997	2.06E-17	--	7.19E-12	0.00E+00	2.14E-18	4.47E-18	3.00E-18	--	--
1996	5.94E-18	--	6.94E-12	8.00E-20	--	--	--	--	--
1995	5.99E-18	--	2.11E-12	1.20E-19	--	--	--	--	--
1994	7.29E-18	--	3.69E-12	3.10E-19	--	--	--	--	--
1993	7.10E-18	--	4.16E-12	3.90E-19	--	--	--	--	--
1992	5.83E-18	--	7.43E-12	2.40E-19	--	--	--	--	--
1991	7.70E-18	--	1.17E-11	0.00E+00	--	--	--	--	--
1990	5.64E-18	--	1.86E-11	7.00E-20	--	--	--	--	--
1989	1.50E-17	--	2.50E-11	2.90E-19	--	--	--	--	--
1988	5.80E-17	--	2.41E-11	2.00E-19	--	--	--	--	--
1987	4.35E-17	--	3.33E-11	1.60E-19	--	--	--	--	--
1986	9.34E-17	--	2.13E-11	4.50E-19	--	--	--	--	--
1985	1.26E-16	--	2.73E-11	6.30E-19	--	--	--	--	--
1984	2.32E-17	--	2.21E-11	3.00E-19	--	--	--	--	--
1983	1.32E-17	--	3.43E-11	1.30E-18	--	--	--	--	--
1982	2.39E-17	--	3.93E-11	0.00E+00	--	--	--	--	--
1981	2.07E-17	--	6.76E-11	0.00E+00	--	--	--	--	--
1980	8.80E-18	--	8.88E-11	6.00E-19	--	--	--	--	--
1979	1.60E-17	--	8.60E-12	5.00E-19	--	--	--	--	--

Year	<sup>238</sup> Pu	<sup>210</sup> Po	HTO	<sup>239,240</sup> Pu	<sup>232</sup> Th	<sup>230</sup> Th	<sup>228</sup> Th	<sup>226</sup> Ra	<sup>227</sup> Ac
1978	2.50E-17	--	6.20E-12	4.00E-18	--	--	--	--	--
1977	2.80E-17	--	1.60E-11	0.00E+00	--	--	--	--	--
1976	8.40E-17	--	2.00E-11	2.20E-18	--	--	--	--	--
1975	6.40E-17	--	2.90E-11	3.00E-18	--	--	--	--	--
1974	1.88E-16	1.10E-15	1.53E-10	6.06E-18	--	--	--	--	--
1973	1.56E-16	1.10E-15	7.40E-11	5.03E-18	--	--	--	--	--
1972	1.40E-16	1.30E-15	8.20E-11	4.51E-18	--	--	--	--	--
1971	4.00E-16	2.00E-15	4.80E-09	1.29E-17	--	--	--	--	--
1970	1.19E-14	1.94E-13	1.46E-09	3.82E-16	--	--	--	--	--
1969	2.88E-14	2.70E-13	2.56E-09	9.27E-16	--	--	--	--	--
1968	1.56E-14	3.54E-13	2.24E-09	5.03E-16	--	--	--	--	1.53E-03
1967	1.48E-13	1.37E-12	2.96E-09	4.78E-15	--	--	--	--	1.53E-03
1966	8.31E-14	1.27E-12	1.62E-09	2.68E-15	--	--	--	--	1.53E-03
1965	1.58E-14	1.06E-12	1.68E-09	5.10E-16	--	--	--	--	1.53E-03
1964	6.88E-16	8.80E-13	2.13E-09	2.22E-17	--	--	--	--	1.53E-03
1963	2.95E-16	7.33E-13	2.55E-09	9.50E-18	--	--	--	--	--
1962	3.82E-16	6.11E-13	1.98E-09	1.23E-17	--	--	--	--	--
1961	4.37E-16	5.09E-13	1.95E-09	1.41E-17	--	--	--	--	--
1960	6.83E-13	4.24E-13	8.31E-10	2.20E-14	--	--	--	--	--
1959	--	3.54E-13	2.56E-10	--	--	--	--	--	--
1958	--	2.95E-13	2.33E-10	--	--	--	--	--	--
1957	--	2.46E-13	2.11E-10	--	--	--	--	--	--
1956	--	2.05E-13	1.92E-10	--	--	--	--	--	--
1955	--	1.71E-13	1.75E-10	--	--	--	--	--	--
1954	--	1.42E-13	1.59E-10	--	--	--	--	--	--
1953	--	1.18E-13	--	--	--	--	8.16E-19	1.57E-18	4.94E-19
1952	--	1.18E-13	--	--	--	--	8.16E-19	1.57E-18	4.94E-19
1951	--	1.18E-13	--	--	--	--	8.16E-19	1.57E-18	4.94E-19
1950	--	1.18E-13	--	--	--	--	--	--	--
1949	--	1.18E-13	--	--	--	--	--	--	--

effluents, the median of the annual average, environmental air-monitoring station results for <sup>232</sup>Th, <sup>230</sup>Th and <sup>228</sup>Th have been included in this section.

To account for trace radionuclides that were not included in the routine environmental air or effluent discharge sampling and analysis programs at Mound, <sup>238</sup>Pu scaling factors were developed based on an assay of the feed material, plutonium dioxide, supplied to the Mound facility from SRS, as shown below. As a result, the scaling factor (activity concentration ratio) table (Table 4-3) infers concentrations of trace radionuclides and <sup>239,240</sup>Pu for years in which effluent or air monitoring station data only include <sup>238</sup>Pu.

Table 4-3. SRS plutonium dioxide feed material and Mound scaling factors.

Radionuclide	Half-life (y)	Specific activity (Ci/g)	Reported weight fraction	Activity concentration (Ci/g)	Theoretical activity fraction	<sup>238</sup> Pu activity concentration ratios	
						Theoretical	Corrected <sup>a</sup>
Pu-236 <sup>b</sup>	2.86E+00	5.30E+01	1.00E-06	5.30E-05	3.69E-06	3.86E-06	--
Pu-238 <sup>b</sup>	8.77E+01	1.71E+01	8.02E-01	1.37E+01	9.56E-01	1.00E+00	--
Pu-239 <sup>b</sup>	2.41E+04	6.20E-02	1.59E-01	9.86E-03	6.86E-04	7.18E-04	--
Pu-240 <sup>b</sup>	6.56E+03	2.27E-01	3.00E-02	6.81E-03	4.74E-04	4.96E-04	--
Pu-239,240	--	--	--	--	1.16E-03	1.21E-03	3.22E-02
Pu-242 <sup>b</sup>	3.73E+05	3.96E-03	1.00E-03	3.96E-06	2.76E-07	2.88E-07	--
Pu-241 <sup>b</sup>	1.44E+01	1.03E+02	6.00E-03	6.20E-01	4.31E-02	4.52E-02	--
U-234 <sup>c</sup>	2.46E+05	6.22E-03	1.90E-03	1.18E-05	8.22E-07	8.61E-07	--
Np-237 <sup>c</sup>	2.14E+06	7.05E-04	3.00E-04	2.12E-07	1.47E-08	1.54E-08	--
Am-241 <sup>c</sup>	4.32E+02	3.43E+00	5.00E-04	1.72E-03	1.19E-04	1.25E-04	--
Pa-231 <sup>c</sup>	3.28E+04	4.72E-02	1.00E-05	4.72E-07	3.28E-08	3.44E-08	--
Th-232 <sup>c</sup>	1.41E+10	1.10E-07	1.00E-05	1.10E-12	7.63E-14	7.99E-14	--
U-232 <sup>c</sup>	6.89E+01	2.24E+01	1.00E-05	2.24E-04	1.56E-05	1.63E-05	--
U-235 <sup>c</sup>	7.04E+08	2.16E-06	1.00E-05	2.16E-11	1.50E-12	1.57E-12	--

Radionuclide	Half-life (y)	Specific activity (Ci/g)	Reported weight fraction	Activity concentration (Ci/g)	Theoretical activity fraction	<sup>238</sup> Pu activity concentration ratios	
						Theoretical	Corrected <sup>a</sup>
U-236 <sup>c</sup>	2.34E+07	6.47E-05	1.00E-05	6.47E-10	4.50E-11	4.71E-11	--
Ac-227 <sup>c</sup>	2.18E+01	7.23E+01	1.00E-05	7.23E-04	5.03E-05	5.27E-05	--
Total			1.00E+00	1.44E+01	1.00E+00		

- a. The actual ratio of <sup>238</sup>Pu to <sup>239,240</sup>Pu based on air sample analytical results for 5 years (1975 to 1980) is 31.0:1. This ratio was calculated using the annual mean concentration of <sup>238</sup>Pu and <sup>239</sup>Pu at maximum sampler location and corrected for offsite contribution of <sup>238</sup>Pu and <sup>239,240</sup>Pu indicated at the location of the minimum <sup>238</sup>Pu and <sup>239,240</sup>Pu offsite concentration. [This data is presented in Table 4-4 below.]
- b. EG&G (1995a)
- c. DOE (1993)

The feed material profile discussed above was adjusted to reflect the actual observed air sample ratio of <sup>238</sup>Pu to <sup>239,240</sup>Pu to infer the <sup>239,240</sup>Pu concentration in air for years in which only <sup>238</sup>Pu data were available. The actual activity concentration ratio for <sup>239,240</sup>Pu was inferred from measurements of air samples taken by Mound for the 1975 through 1980 period of record (See Table 4-4.). The observed ratio of <sup>238</sup>Pu to <sup>239,240</sup>Pu in air samples from onsite sampling stations recording the highest annual average plutonium concentration from 1975 to 1980 is 31.0 to 1 compared to the theoretical ratio of 824 (i.e., the inverse of the theoretical <sup>239,240</sup>Pu activity concentration shown above). The discrepancy between the feed material ratio of <sup>238</sup>Pu to <sup>239,240</sup>Pu and the observed air sample ratio of <sup>238</sup>Pu to <sup>239,240</sup>Pu is likely the result of <sup>239,240</sup>Pu effluent emissions associated with <sup>239,240</sup>Pu research rather than the SRS feed material profile.

Table 4-4. Pu-238:<sup>239,240</sup>Pu activity concentration ratios inferred from measurements of environmental air samples taken at Mound.

Year	Annual mean activity concentrations (10 <sup>-18</sup> μCi/ml) <sup>a</sup>				<sup>238</sup> Pu: <sup>239,240</sup> Pu net activity concentration ratio
	Highest onsite <sup>238</sup> Pu	Lowest offsite <sup>238</sup> Pu	Highest onsite <sup>239,240</sup> Pu	Lowest offsite <sup>239,240</sup> Pu	
1975	1,033	1.2	41.0	16.0	41.3
1976	267	0.5	13.0	3.8	29.0
1977	81	0.9	31.0	16.0	5.3
1978	110	0.8	27.0	22.0	21.8
1979	190	0.5	11.0	7.4	52.6
1980	58	0.2	4.9	3.3	36.1
Min	58	0.2	4.9	3.3	5.3
Max	1,033	1.2	41.0	22.0	52.6
Median	150	0.7	20.0	11.7	32.5
Mean	290	0.7	21.3	11.4	31.0
StdDev	372	0.4	13.8	7.7	16.4

- a. Data from Attachment D, Tables D-3 through D-8.

The relative internal dose contribution from radionuclides present in SRS plutonium dioxide feed material has been assessed using ICRP Publication 68 dose conversion factors (DCF), as discussed below (ICRP 1995). Most of the internal dose (99.8%) is attributable to <sup>238</sup>Pu (96.5 %) and <sup>239,240</sup>Pu (3.3%). As a result, dose reconstructors should neglect the internal dose contribution from trace radionuclides other than <sup>239,240</sup>Pu in effluent associated with the feed material. See Table 4-5.

Table 4-5. SRS plutonium dioxide feed material relative dose contribution.

Radionuclide	ICRP 68 DCF (Sv/Bq)	Activity concentration (Ci/g)	Activity fraction	Weighted DCF	Percent dose contribution
Pu-236	1.30E-05	5.30E-05	3.58E-06	4.66E-11	1.61E-04
Pu-238 <sup>a</sup>	3.00E-05	1.37E+01	9.28E-01	2.78E-05	9.65E+01
Pu-239,240 <sup>a</sup>	3.20E-05	4.42E-01	2.99E-02	9.56E-07	3.31E-00
Pu-242	3.10E-05	3.96E-06	2.68E-07	8.30E-12	2.88E-05
Pu-241	5.80E-07	6.20E-01	4.19E-02	2.43E-08	8.42E-02
U-234	6.80E-06	1.18E-05	7.99E-07	5.43E-12	1.88E-05

Radionuclide	ICRP 68 DCF (Sv/Bq)	Activity concentration (Ci/g)	Activity fraction	Weighted DCF	Percent dose contribution
U-235	6.10E-06	2.16E-11	1.46E-12	8.91E-18	3.09E-11
U-236	6.30E-06	6.47E-10	4.37E-11	2.76E-16	9.55E-10
U-232	2.60E-05	2.24E-04	1.51E-05	3.93E-10	1.36E-03
Am-241	2.70E-05	1.72E-03	1.16E-04	3.13E-09	1.08E-02
Pa-231	8.90E-05	4.72E-07	3.19E-08	2.84E-12	9.84E-06
Th-232	2.90E-05	1.10E-12	7.41E-14	2.15E-18	7.45E-12
Np-237	1.50E-05	2.12E-07	1.43E-08	2.14E-13	7.43E-07
Ac-227	6.30E-04	7.23E-04	4.89E-05	3.08E-08	1.07E-01

a. Dosimetrically significant.

For years in which onsite air monitoring data were unavailable (prior to 1971) and total, annual, stack effluent data was available, empirically derived onsite atmospheric dispersion factors (plutonium, polonium particulates, and hydrogen gas/vapor  $\chi/Q$ s) were used to estimate the intake air concentration.

The  $\chi/Q$  derivation coupled the site-wide median air concentration ( $^{238}\text{Pu}$ ,  $^{210}\text{Po}$ , and  $^3\text{H}$  concentration) with the corresponding total, annual, effluent discharges (Table 4-6). This derivation was repeated for an 11-year period of record (1973 to 1983) for plutonium and HTO, and 1 year (1973) for polonium. For assigning an intake concentration, the 11- and 1-year average  $\chi/Q$  was selected:  $8.61\text{E-}05$   $\text{sec/m}^3$  for plutonium,  $5.12\text{E-}04$   $\text{sec/m}^3$  for polonium, and  $2.56\text{E-}07$   $\text{sec/m}^3$  for tritium (Table 4-7). The calculated dispersion factor data for the 11- and 1-year period are presented in Table 4-7 below.

Table 4-6. Total Mound site radioactive effluent discharges, 1949–1983.<sup>a</sup>

Year	$^{238}\text{Pu}$ ( $\mu\text{Ci}$ )	$^{210}\text{Po}$ : $^{238}\text{Pu}$ ratio <sup>b</sup>	$^{210}\text{Po}$ ( $\mu\text{Ci}$ )	$^3\text{H}$ (Ci)	$^{226}\text{Ra}$ ( $\mu\text{Ci}$ )	$^{227}\text{Ac}$ ( $\mu\text{Ci}$ )	$^{228}\text{Th}$ ( $\mu\text{Ci}$ )
1983	4	--	--	4,293			
1982	21	--	--	4,283			
1981	8	--	--	4,285			
1980	15	--	--	3,795			
1979	12	--	--	3,831			
1978	14	--	--	7,346			
1977	12	--	--	4,896			
1976	15	--	--	6,206			
1975	23	--	--	8,859			
1974	28	0.025	0.7 <sup>c</sup>	10,031			
1973	84	0.81	68 <sup>c</sup>	15,331			
1972	74	5.75	426	30,483			
1971	401	3.38	1,355	73,503			
1970	4,342	2.76	11,984	179,468			
1969	10,544	1.58	16,660	315,252			
1968	5,720	3.82	21,850	275,856		1.06	
1967	54,347	1.55	84,238	364,685		1.06	
1966	30,442	2.57	78,263	199,561		1.06	
1965	5,803	11.20	65,009	206,750		1.06	
1964	252	215.40	54,279	262,638		1.06	
1963	108	417.84	45,127	313,932			
1962	140	268.24	37,554	244,455			
1961	160	196.25	31,400	240,644			
1960	250,125 <sup>d</sup>	0.10	26,161	102,427			
1959			21,806	31,527			
1958			18,177	28,374			
1957			15,148	25,537			
1956			12,623	22,983			



Year	<sup>238</sup> Pu (μCi)	<sup>210</sup> Po: <sup>238</sup> Pu ratio <sup>b</sup>	<sup>210</sup> Po (μCi)	<sup>3</sup> H (Ci)	<sup>226</sup> Ra (μCi)	<sup>227</sup> Ac (μCi)	<sup>228</sup> Th (μCi)
1955			10,509	20,685			
1954			8,773 <sup>e</sup>	18,616 <sup>f</sup>			
1953			7,305		0.097	0.03	0.05
1952			7,305		0.097	0.03	0.05
1951			7,305		0.097	0.03	0.05
1950			7,305				
1949			7,305				

- Adapted from DOE (1993b). "--" means no data.
- From 1967 through 1972 the ratio of <sup>210</sup>Po to <sup>238</sup>Pu is based on radionuclide-specific (<sup>238</sup>Pu and <sup>210</sup>Po) analyses of offsite (onsite for 1972) air samples obtained at the 0-3 mile roving locations from 1967 to 1972 (see Attachment C, Tables C-9 through C-14).
- 1973 and 1974 <sup>210</sup>Po effluent data (Carfagno and Westendorf 1974; Carfagno and Robinson 1975).
- Elevated <sup>238</sup>Pu levels due to R Building operations prior to the SM Building becoming operational in 1961. In 1962 a second bank of HEPA filters was installed in the SM Building plenum (DOE 1993b).
- From 1954 through 1966, it is assumed that the <sup>210</sup>Po release rate increased 20% each year from the constant 1949 through 1953 value.
- From 1954 through 1958, it is assumed that the HTO release rate decreased 10% each year from that reported for 1959.

Table 4-7. Inferred onsite dispersion factors by radionuclide, 1973–1983.

Year	$\chi/Q$ (sec/m <sup>3</sup> )		
	H-3	Pu-238	Po-210
1983	2.52E-07	1.04E-04	--
1982	2.90E-07	3.59E-05	--
1981 <sup>a</sup>	4.98E-07	8.17E-05	--
1980 <sup>b</sup>	7.38E-07	1.85E-05	--
1979	7.08E-08	4.21E-05	--
1978	2.66E-08	5.64E-05	--
1977	1.03E-07	7.36E-05	--
1976	1.02E-07	1.77E-04	--
1975	1.03E-07	8.78E-05	--
1974 <sup>c</sup>	4.81E-07	2.12E-04	4.96E-02
1973 <sup>d</sup>	1.52E-07	5.86E-05	5.12E-04
N	11	11	2
Min	2.66E-08	1.85E-05	5.12E-04
Max	7.38E-07	2.12E-04	4.96E-02
Mean	2.56E-07	8.61E-05	2.51E-02

- Year of maximum <sup>238</sup>Pu  $\chi/Q$
- Year of maximum <sup>3</sup>H  $\chi/Q$
- Year of maximum <sup>210</sup>Po  $\chi/Q$  due to Mound D&D Program activity
- <sup>210</sup>Po  $\chi/Q$  used in this analysis based on 1973 data

Polonium production and research at Mound were discontinued in the early 1970s (DOE 1993b). Polonium effluent discharge data are available only for 1953, 1973 and 1974; as a result, the ratio of <sup>210</sup>Po to <sup>238</sup>Pu observed in environmental air samples has been used to infer the <sup>210</sup>Po effluent release rate from 1967 through 1970. In addition, the 1973 and 1974 onsite polonium air monitoring results were influenced by the decontamination and decommissioning of the Mound polonium processing facilities (DOE 1993b). Consequently, the 1974 polonium effluent and air monitoring results shown in Table 4-7 were not used in the  $\chi/Q$  derivation for polonium.

#### 4.2.2 Effluent Intake Concentrations

The following discussion describes the technical approach used to establish airborne radionuclide concentrations to determine radionuclide intakes (Section 4.2.3) and submersion exposures (Section 4.2.4). Section 4.2.5 describes the technical approach and results for the contaminated soil exposure

pathways. These exposure pathways are (1) resuspension intakes, (2) external submersion, and (3) direct external from the contaminated soil layer.

For  $^{238}\text{Pu}$ , the effluent concentration data from 2001 through 1971 are based on the median, onsite annual environmental air monitoring results. From 1960 through 1970, the effluent concentration data are based on the reported  $^{238}\text{Pu}$  annual effluent source term from Table 4-6 combined with the derived atmospheric dispersion factor for  $^{238}\text{Pu}$  from Table 4-7 to infer the median onsite environmental concentration.

For  $^{210}\text{Po}$ , the effluent concentration data from 1971 through 1974 are based on the median, onsite annual environmental air monitoring results. From 1967 through 1970, the data are based on reported  $^{238}\text{Pu}$  annual effluent source terms (scaled to infer  $^{210}\text{Po}$  based on the ratio of  $^{210}\text{Po}$  to  $^{238}\text{Pu}$  on air samples) combined with the derived atmospheric dispersion factor for polonium from Table 4-6 to infer median onsite environmental concentrations. As previously discussed, polonium effluent discharge data are available for only 1953, 1973 and 1974; consequently, from 1949 through 1953, it is assumed that the  $^{210}\text{Po}$  effluent source term remained constant at the 20- $\mu\text{Ci}$  per day level (Bradley 1953a). From 1954 through 1966, it is assumed that the  $^{210}\text{Po}$  release rate increased 20% each year from the constant 1949 through 1953 daily values (Table 4-6). This annual increase was considered necessary and reasonable to extrapolate between 1953 and 1967 effluent release rates. The 1949 through 1966  $^{210}\text{Po}$  annual effluent source terms were combined with the atmospheric dispersion factor derived for polonium (Table 4-7) to infer onsite environmental concentrations.

For HTO, the data from 1971 through 2001 are based on the median, onsite annual environmental air monitoring results. Beginning in 1959 through 1970, the data are based on reported tritium effluent source terms (Table 4-6) combined with derived atmospheric dispersion factor derived for tritium in Table 4-7 to infer onsite environmental concentrations. No data were available for the years 1954 through 1958. To estimate the amounts of tritium effluent, 1958 was assumed to be 90% of the measured effluent for 1959 (31,527 Ci/yr); 1957 was assumed to be 90% of the value assigned to 1958, etc. From 1954 through 1958, the HTO annual effluent source terms were combined with derived atmospheric dispersion factor for tritium to infer onsite median environmental concentrations.

Table 4-2 lists the annual, average, effluent median intake concentrations used to calculate annual claimant intakes described in Section 4.2.3.

From 1951 through 1953 Mound intermittently conducted a research and development program to recover  $^{227}\text{Ac}$ ,  $^{226}\text{Ra}$  and  $^{228}\text{Th}$  from neutron irradiated  $^{226}\text{Ra}$ . The three parent radionuclides of  $^{227}\text{Ac}$ ,  $^{226}\text{Ra}$  and  $^{228}\text{Th}$  and their radioactive progeny were present in the irradiated material. The recovery operation was conducted in a special shielded process facility referred to as the old cave (room SW-19) on the east side of the building (EG&G 1995a). From 1951 to 1953 work in the cave resulted in the release of  $1.6\text{E}+05$  uCi of  $^{227}\text{Ac}$ ,  $^{226}\text{Ra}$ ,  $^{228}\text{Th}$  and their radioactive progeny (Story 1973). At the completion of the program 47.5 Ci of  $^{226}\text{Ra}$ , 14.9 Ci of  $^{227}\text{Ac}$ , and 24.6 Ci of  $^{228}\text{Th}$  were purified.

Health Physics Monthly Information Reports prior to September 1952 do not contain useful air sample or effluent data from the Ra-Ac Program work areas. Beginning in September 1952, most of the Monthly and Quarterly Health Physics Reports contain a summary of the monthly average of initial air filter counts and a summary of the monthly average of final air filter counts performed between 20 to 30 days after the initial count. Initial and final air sample counting data from high risk Ra-Ac work areas is presented in Table 4-8 below. This data has been used to calculate the release rate of long lived radionuclides ( $^{227}\text{Ac}$ ,  $^{226}\text{Ra}$ , and  $^{228}\text{Th}$ ) from the release reported by Storey ( $1.6\text{E}+05$  uCi) assuming that equal quantities were released each year from 1951 through 1953 and assuming that the long lived radionuclides consisted of  $^{227}\text{Ac}$ ,  $^{226}\text{Ra}$ , and  $^{228}\text{Th}$  in the same proportion as the amounts purified at the completion the program ( 55%  $^{226}\text{Ra}$ , 17%  $^{227}\text{Ac}$ , and 28%  $^{228}\text{Th}$ ).

Table 4-8. Ratio of initial to final air sample counts from Ra-Ac program areas.

High risk Ra, Ac, and Th area air samples	Month/year	Ratio of initial to final count	Reference
GP1A	September 1952	2E+04	Bradley 1952b
GP cave	November 1952	5E+04	Bradley 1952d
GP lab	December 1952	3E+04	Bradley 1952e
GP exhaust	February 1953	1E+05	Bradley 1953c
GP high risk area air samples (5)	April 1953	2E+06	Bradley 1953e
GP high risk area air samples (5)	May 1953	1E+06	Bradley 1953f
GP high risk area air samples (5)	June 1953	8E+04	Bradley 1953g
GP high risk area air samples (5)	July 1953	6E+04	Bradley 1953h
GP high risk area air samples (5)	August 1953	3E+03	Bradley 1953l
High risk air lock	September 1953	3E+04	Bradley 1953j
High risk air lock	October 1953	1E+05	Bradley 1953k
High risk air lock	November 1953	2E+05	Bradley 1953l
High risk air lock	December 1953	5E+04	Bradley 1953m
Average		3E+05	
Minimum		3E+03	
Maximum		2E+06	

The median site-wide intake concentrations of  $^{227}\text{Ac}$ ,  $^{226}\text{Ra}$ , and  $^{228}\text{Th}$  presented in Table 4-2 have been calculated assuming that the T west polonium stack was the source of the emissions with a dispersion factor ( $\chi/Q$ ) of  $5.12\text{E-}04 \text{ sec/m}^3$ .

From 1964 through 1968, purified  $^{227}\text{Ac}$  in oxide and nitrate forms was processed in a hot cell and analytical lab area (Room SW-140) in the SW Building (EG&G 1995a). This work resulted in the release of 5.3 uCi of  $^{227}\text{Ac}$  to the atmosphere (Storey 1973).

The median site-wide concentration of  $^{227}\text{Ac}$  presented in Table 4-2 has been calculated assuming that equal quantities were released each year from 1964 through 1968 from the T west polonium stack with a dispersion factor ( $\chi/Q$ ) of  $5.12\text{E-}04 \text{ sec/m}^3$ .

#### 4.2.3 Mound Effluent Inhalation Intakes

##### 4.2.3.1 Site-Wide Annual Median Effluent Radionuclide Inhalation Intakes

The site-wide annual median radionuclide intakes presented in Table 4-9 are derived by multiplying the annual median effluent air concentrations (Table 4-2) by  $2,400 \text{ m}^3/\text{yr}$ , which is the product of reference man's default breathing rate ( $1.2 \text{ m}^3/\text{hr}$ ) and 2,000 work hr/yr. The tritium intake has been increased by a factor of 1.5 to account for skin absorption. As discussed above, most of the internal dose (99.8%) from SRS feed material is attributable to  $^{238}\text{Pu}$  and  $^{239,240}\text{Pu}$ . As a result, only intakes of  $^{238}\text{Pu}$ ,  $^{239,240}\text{Pu}$ , HTO,  $^{210}\text{Po}$ ,  $^{232}\text{Th}$ ,  $^{230}\text{Th}$ ,  $^{228}\text{Th}$ ,  $^{226}\text{Ra}$  and  $^{227}\text{Ac}$  from Mound effluents are significant for dose reconstruction. The most claimant favorable absorption type should be chosen for dose reconstruction because of the various chemical forms of polonium, thorium and plutonium used at Mound Laboratory.

##### 4.2.3.2 Site-Wide Maximum Annual Average Effluent Inhalation Intakes

Site-wide maximum, annual radionuclide intakes have been calculated to estimate the upper 95th percentile effluent intake. These intakes have been calculated in a similar manner as the median

Table 4-9. Site-wide annual median effluent inhalation intakes at Mound (Bq).

Year	<sup>238</sup> Pu	<sup>210</sup> Po	HTO	<sup>239,240</sup> Pu	<sup>232</sup> Th	<sup>230</sup> Th	<sup>228</sup> Th	<sup>227</sup> Ac	<sup>226</sup> Ra
2003	--	--	--	--	--	--	--	--	--
2002	3.34E-04	--	4.66E+02	1.69E-05	0.00E+00	0.00E+00	0.00E+00	--	--
2001	3.56E-04	--	6.43E+02	2.66E-06	2.00E-04	2.70E-04	3.37E-04	--	--
2000	3.62E-04	--	3.04E+02	1.51E-05	2.58E-04	3.66E-04	3.29E-04	--	--
1999	1.27E-04	--	1.13E+03	1.33E-05	3.92E-04	3.92E-04	4.08E-04	--	--
1998	4.54E-04	--	1.34E+03	6.22E-06	1.60E-05	0.00E+00	0.00E+00	--	--
1997	1.83E-03	--	9.58E+02	0.00E+00	1.90E-04	3.97E-04	2.66E-04	--	--
1996	5.27E-04	--	9.24E+02	7.10E-06	--	--	--	--	--
1995	5.32E-04	--	2.81E+02	1.07E-05	--	--	--	--	--
1994	6.47E-04	--	4.92E+02	2.75E-05	--	--	--	--	--
1993	6.30E-04	--	5.54E+02	3.46E-05	--	--	--	--	--
1992	5.18E-04	--	9.90E+02	2.13E-05	--	--	--	--	--
1991	6.84E-04	--	1.55E+03	0.00E+00	--	--	--	--	--
1990	5.01E-04	--	2.47E+03	6.22E-06	--	--	--	--	--
1989	1.33E-03	--	3.33E+03	2.66E-05	--	--	--	--	--
1988	5.15E-03	--	3.21E+03	1.78E-05	--	--	--	--	--
1987	3.86E-03	--	4.44E+03	1.42E-05	--	--	--	--	--
1986	8.29E-03	--	2.84E+03	4.00E-05	--	--	--	--	--
1985	1.12E-02	--	3.64E+03	5.59E-05	--	--	--	--	--
1984	2.06E-03	--	2.94E+03	2.66E-05	--	--	--	--	--
1983	1.17E-03	--	4.57E+03	1.15E-04	--	--	--	--	--
1982	2.12E-03	--	5.23E+03	0.00E+00	--	--	--	--	--
1981	1.84E-03	--	9.00E+03	0.00E+00	--	--	--	--	--
1980	7.81E-04	--	1.18E+04	5.33E-05	--	--	--	--	--
1979	1.42E-03	--	1.15E+03	4.44E-05	--	--	--	--	--
1978	2.22E-03	--	8.26E+02	3.55E-04	--	--	--	--	--
1977	2.49E-03	--	2.13E+03	0.00E+00	--	--	--	--	--
1976	7.46E-03	--	2.66E+03	1.95E-04	--	--	--	--	--
1975	5.68E-03	--	3.86E+03	2.66E-04	--	--	--	--	--
1974	1.67E-02	9.77E-02	2.04E+04	5.38E-04	--	--	--	--	--
1973	1.39E-02	9.77E-02	9.86E+03	4.47E-04	--	--	--	--	--
1972	1.24E-02	1.15E-01	1.09E+04	4.01E-04	--	--	--	--	--
1971	3.55E-02	1.78E-01	6.39E+05	1.14E-03	--	--	--	--	--
1970	1.05E+00	1.73E+01	1.94E+05	3.39E-02	--	--	--	--	--
1969	2.56E+00	2.40E+01	3.41E+05	8.24E-02	--	--	--	--	--
1968	1.39E+00	3.15E+01	2.98E+05	4.47E-02	--	--	--	1.53E-03	--
1967	1.32E+01	1.21E+02	3.94E+05	4.24E-01	--	--	--	1.53E-03	--
1966	7.38E+00	1.13E+02	2.16E+05	2.38E-01	--	--	--	1.53E-03	--
1965	1.41E+00	9.38E+01	2.24E+05	4.53E-02	--	--	--	1.53E-03	--
1964	6.11E-02	7.81E+01	2.84E+05	1.97E-03	--	--	--	1.53E-03	--
1963	2.62E-02	6.51E+01	3.39E+05	8.44E-04	--	--	--	--	--
1962	3.39E-02	5.43E+01	2.64E+05	1.09E-03	--	--	--	--	--
1961	3.88E-02	4.52E+01	2.60E+05	1.25E-03	--	--	--	--	--
1960	6.06E+01	3.77E+01	1.11E+05	1.95E+00	--	--	--	--	--
1959	--	3.14E+01	3.41E+04	--	--	--	--	--	--
1958	--	2.62E+01	3.10E+04	--	--	--	--	--	--
1957	--	2.18E+01	2.82E+04	--	--	--	--	--	--
1956	--	1.82E+01	2.56E+04	--	--	--	--	--	--
1955	--	1.51E+01	2.33E+04	--	--	--	--	--	--
1954	--	1.26E+01	2.12E+04	--	--	--	--	--	--
1953	--	1.05E+01	--	--	--	--	7.24E-05	4.39E-05	1.40E-04
1952	--	1.05E+01	--	--	--	--	7.24E-05	4.39E-05	1.40E-04
1951	--	1.05E+01	--	--	--	--	7.24E-05	4.39E-05	1.40E-04
1950	--	1.05E+01	--	--	--	--	--	--	--
1949	--	1.05E+01	--	--	--	--	--	--	--

intakes presented in Table 4-9 above. From 1971 to 2001, the maximum, annual average on-site air monitoring station results (Tables C-13, C-14, and D-1 through D-30) were used to determine intake concentrations.

For years in which onsite air monitoring data were unavailable (prior to 1971) and annual effluent data was available, empirically derived onsite atmospheric dispersion factors (plutonium, polonium particulates, and hydrogen gas/vapor  $\chi/Q$ s) were used to estimate the intake air concentration. The  $\chi/Q$  derivation coupled the onsite air monitoring location indicating the highest annual, average air concentration ( $^{238}\text{Pu}$ ,  $^{210}\text{Po}$ , and  $^3\text{H}$  concentration) with the corresponding effluent source term (shown in Table 4-7). This derivation was repeated for an 11-year period of record (1973 to 1983) for plutonium and HTO, and 1 year (1973) for polonium. For assigning an intake concentration, the 11- and 1-year average  $\chi/Q$  was selected:  $6.03\text{E-}04 \text{ sec/m}^3$  for plutonium,  $7.43\text{E-}04 \text{ sec/m}^3$  for polonium, actinium and thorium and  $5.90\text{E-}07 \text{ sec/m}^3$  for gases/vapors (e.g. HT/HTO). The dispersion factor data used to infer maximum, annual average radionuclide intakes are presented in Table 4-10 below. The maximum intakes shown in Table 4-11 have been derived by multiplying the maximum, site-wide, annual average effluent air concentrations by  $2,400 \text{ m}^3/\text{yr}$ , which is the product of reference man's default breathing rate ( $1.2 \text{ m}^3/\text{hr}$ ) and  $2,000 \text{ work hr/yr}$ . The tritium intake has been increased by a factor of 1.5 to account for skin absorption.

Table 4-10. Inferred maximum onsite dispersion factors by radionuclide, 1983–1973.

Year	$\chi/Q \text{ (sec/m}^3\text{)}$		
	H-3	Pu-238	Po-210, Ac-227, Th-228 and Ra-226
1983	3.12E-07	5.85E-04	--
1982	4.16E-07	1.32E-04	--
1981	5.78E-07	1.44E-03	--
1980	3.43E-06	1.22E-04	--
1979	1.11E-07	5.00E-04	--
1978	3.87E-08	2.48E-04	--
1977	1.80E-07	2.05E-04	--
1976	1.32E-07	5.55E-04	--
1975	1.14E-07	1.41E-03	--
1974	9.85E-07	9.11E-04	--
1973	1.89E-07	5.21E-04	7.43E-04
N	11	11	1
Min	3.87E-08	1.22E-04	7.43E-04
Max	3.43E-06	1.44E-03	7.43E-04
Mean	5.90E-07	6.03E-04	7.43E-04

Table 4-11. Site-wide maximum annual intakes at Mound (Bq).

Year	$^{238}\text{Pu}$	$^{210}\text{Po}$	HTO	$^{239,240}\text{Pu}$	$^{232}\text{Th}$	$^{230}\text{Th}$	$^{228}\text{Th}$	$^{227}\text{Ac}$	$^{226}\text{Ra}$
2003	--	--	--	--	--	--	--	--	--
2002	8.32E-04	--	1.51E+03	2.93E-05	0.00E+00	0.00E+00	0.00E+00	--	--
2001	1.41E-03	--	1.01E+03	1.78E-05	2.50E-04	3.47E-04	3.82E-04	--	--
2000	9.85E-04	--	5.89E+02	1.51E-05	5.86E-04	8.01E-04	6.60E-04	--	--
1999	1.39E-04	--	2.65E+03	2.13E-05	4.40E-04	5.14E-04	4.93E-04	--	--
1998	6.75E-04	--	1.79E+03	6.22E-06	3.55E-05	0.00E+00	0.00E+00	--	--
1997	5.12E-03	--	1.57E+03	1.65E-04	3.61E-04	5.48E-04	3.89E-04	--	--
1996	7.91E-03	--	1.26E+03	1.32E-04	--	--	--	--	--
1995	2.90E-02	--	4.46E+02	1.40E-04	--	--	--	--	--
1994	3.15E-02	--	1.00E+03	3.11E-04	--	--	--	--	--
1993	3.68E-03	--	9.00E+02	1.18E-04	--	--	--	--	--
1992	1.98E-03	--	2.20E+03	3.29E-05	--	--	--	--	--
1991	3.04E-03	--	5.18E+03	0.00E+00	--	--	--	--	--
1990	3.11E-03	--	5.11E+03	2.49E-05	--	--	--	--	--

Year	<sup>238</sup> Pu	<sup>210</sup> Po	HTO	<sup>239,240</sup> Pu	<sup>232</sup> Th	<sup>230</sup> Th	<sup>228</sup> Th	<sup>227</sup> Ac	<sup>226</sup> Ra
1989	4.08E-03	--	4.13E+03	4.44E-05	--	--	--	--	--
1988	7.10E-03	--	5.41E+03	5.33E-05	--	--	--	--	--
1987	1.68E-02	--	5.17E+03	6.22E-05	--	--	--	--	--
1986	1.58E-02	--	5.45E+03	9.06E-05	--	--	--	--	--
1985	1.62E-02	--	4.36E+03	9.59E-05	--	--	--	--	--
1984	1.12E-02	--	3.77E+03	6.22E-05	--	--	--	--	--
1983	6.59E-03	--	5.66E+03	1.78E-04	--	--	--	--	--
1982	7.81E-03	--	7.53E+03	2.66E-05	--	--	--	--	--
1981	3.23E-02	--	1.05E+04	2.66E-05	--	--	--	--	--
1980	5.15E-03	--	5.50E+04	1.33E-04	--	--	--	--	--
1979	1.69E-02	--	1.80E+03	2.84E-04	--	--	--	--	--
1978	9.77E-03	--	1.20E+03	4.44E-04	--	--	--	--	--
1977	6.93E-03	--	3.73E+03	8.88E-04	--	--	--	--	--
1976	2.34E-02	--	3.46E+03	8.17E-04	--	--	--	--	--
1975	9.15E-02	--	4.53E+03	1.95E-03	--	--	--	--	--
1974	7.18E-02	1.07E-01	4.26E+04	2.31E-03	--	--	--	--	--
1973	1.23E-01	1.33E-01	1.29E+04	3.97E-03	--	--	--	--	--
1972	3.55E-02	2.04E-01	2.66E+04	1.14E-03	--	--	--	--	--
1971	3.55E-02	3.55E-01	7.19E+05	1.14E-03	--	--	--	--	--
1970	7.36E+00	2.51E+01	4.47E+05	2.37E-01	--	--	--	--	--
1969	1.79E+01	3.48E+01	7.85E+05	5.76E-01	--	--	--	--	--
1968	9.70E+00	4.57E+01	6.87E+05	3.13E-01	--	--	--	2.22E-03	--
1967	9.22E+01	1.76E+02	9.08E+05	2.97E+00	--	--	--	2.22E-03	--
1966	5.16E+01	1.63E+02	4.97E+05	1.66E+00	--	--	--	2.22E-03	--
1965	9.84E+00	1.36E+02	5.15E+05	3.17E-01	--	--	--	2.22E-03	--
1964	4.27E-01	1.13E+02	6.54E+05	1.38E-02	--	--	--	2.22E-03	--
1963	1.83E-01	9.46E+01	7.82E+05	5.90E-03	--	--	--	--	--
1962	2.37E-01	7.88E+01	6.09E+05	7.65E-03	--	--	--	--	--
1961	2.71E-01	6.57E+01	5.99E+05	8.74E-03	--	--	--	--	--
1960	4.24E+02	5.47E+01	2.55E+05	1.37E+01	--	--	--	--	--
1959	--	4.56E+01	7.85E+04	--	--	--	--	--	--
1958	--	3.80E+01	7.14E+04	--	--	--	--	--	--
1957	--	3.17E+01	6.49E+04	--	--	--	--	--	--
1956	--	2.64E+01	5.90E+04	--	--	--	--	--	--
1955	--	2.20E+01	5.36E+04	--	--	--	--	--	--
1954	--	1.83E+01	4.88E+04	--	--	--	--	--	--
1953	--	1.53E+01	--	--	--	--	1.05E-04	6.37E-05	1.40E-04
1952	--	1.53E+01	--	--	--	--	1.05E-04	6.37E-05	1.40E-04
1951	--	1.53E+01	--	--	--	--	1.05E-04	6.37E-05	1.40E-04
1950	--	1.53E+01	--	--	--	--	--	--	--
1949	--	1.53E+01	--	--	--	--	--	--	--

An estimate of the uncertainty associated with the median environmental intakes at Mound presented in Table 4-9 has been made by assuming that the intakes are lognormally distributed and that the median intakes represent the 50th percentile intake rate. The site-wide, maximum, annual average intakes presented in Table 4-11 are assumed to represent the upper 95th percentile intake. The resulting geometric standard deviations (GSDs) are presented in Table 4-12 below.

Table 4-12. Geometric standard deviation for effluent intakes at Mound.

Year	<sup>238</sup> Pu	<sup>210</sup> Po	<sup>3</sup> H	<sup>239,240</sup> Pu	<sup>232</sup> Th	<sup>230</sup> Th	<sup>228</sup> Th	<sup>227</sup> Ac	<sup>226</sup> Ra
2003	--	--	--	--	--	--	--	--	--
2002	1.7	--	2.0	1.7	<EL	<EL	<EL	--	--
2001	2.3	--	1.3	3.1	1.1	1.2	1.1	--	--
2000	1.8	--	1.5	1.0	1.6	1.6	1.5	--	--
1999	1.1	--	1.7	1.3	1.1	1.2	1.1	--	--
1998	1.3	--	1.2	1.0	1.6	<EL	<EL	--	--
1997	1.9	--	1.3	<EL	1.5	1.2	1.3	--	--
1996	5.1	--	1.2	5.8	1.3	1.3	1.2	--	--

Year	<sup>238</sup> Pu	<sup>210</sup> Po	<sup>3</sup> H	<sup>239,240</sup> Pu	<sup>232</sup> Th	<sup>230</sup> Th	<sup>228</sup> Th	<sup>227</sup> Ac	<sup>226</sup> Ra
1995	11.2	--	1.3	4.7	--	--	--	--	--
1994	10.4	--	1.5	4.3	--	--	--	--	--
1993	2.9	--	1.3	2.1	--	--	--	--	--
1992	2.3	--	1.6	1.3	--	--	--	--	--
1991	2.5	--	2.1	<EL	--	--	--	--	--
1990	3.0	--	1.6	2.3	--	--	--	--	--
1989	2.0	--	1.1	1.7	--	--	--	--	--
1988	1.2	--	1.4	1.9	--	--	--	--	--
1987	2.4	--	1.1	2.4	--	--	--	--	--
1986	1.5	--	1.5	1.6	--	--	--	--	--
1985	1.2	--	1.1	1.4	--	--	--	--	--
1984	2.8	--	1.2	1.7	--	--	--	--	--
1983	2.8	--	1.1	1.3	--	--	--	--	--
1982	2.2	--	1.2	<EL	--	--	--	--	--
1981	5.6	--	1.1	<EL	--	--	--	--	--
1980	3.1	--	2.5	1.7	--	--	--	--	--
1979	4.5	--	1.3	3.1	--	--	--	--	--
1978	2.4	--	1.3	1.1	--	--	--	--	--
1977	1.9	--	1.4	<EL	--	--	--	--	--
1976	2.0	--	1.2	2.4	--	--	--	--	--
1975	5.4	--	1.1	3.3	--	--	--	--	--
1974	2.4	1.1	1.6	2.4	--	--	--	--	--
1973	3.7	1.2	1.2	3.7	--	--	--	--	--
1972	1.9	1.4	1.7	1.9	--	--	--	--	--
1971	1.0	1.5	1.1	1.0	--	--	--	--	--
1970	3.2	1.3	1.7	3.2	--	--	--	--	--
1969	3.2	1.3	1.7	3.2	--	--	--	--	--
1968	3.2	1.3	1.7	3.2	--	--	--	1.3	--
1967	3.2	1.3	1.7	3.2	--	--	--	1.3	--
1966	3.2	1.3	1.7	3.2	--	--	--	1.3	--
1965	3.2	1.3	1.7	3.2	--	--	--	1.3	--
1964	3.2	1.3	1.7	3.2	--	--	--	1.3	--
1963	3.2	1.3	1.7	3.2	--	--	--	--	--
1962	3.2	1.3	1.7	3.2	--	--	--	--	--
1961	3.2	1.3	1.7	3.2	--	--	--	--	--
1960	3.2	1.3	1.7	3.2	--	--	--	--	--
1959	--	1.3	1.7	--	--	--	--	--	--
1958	--	1.3	1.7	--	--	--	--	--	--
1957	--	1.3	1.7	--	--	--	--	--	--
1956	--	1.3	1.7	--	--	--	--	--	--
1955	--	1.3	1.7	--	--	--	--	--	--
1954	--	1.3	1.7	--	--	--	--	--	--
1953	--	1.3	1.7	--	--	--	1.3	1.3	1.3
1952	--	1.3	1.7	--	--	--	1.3	1.3	1.3
1951	--	1.3	1.7	--	--	--	1.3	1.3	1.3
1950	--	1.3	1.7	--	--	--	--	--	--
1949	--	1.3	1.7	--	--	--	--	--	--
Mean GSD	3.1	1.3	1.5	2.6	1.3	1.3	1.2	1.3	1.3

<EL – 50th percentile intake concentration is less than the environmental level measured 28 miles offsite.

#### 4.2.4 Annual Effluent Submersion External Exposures

Annual average air submersion external exposures were calculated by multiplying the effluent air intake concentrations in Table 4-2 by 2,000 work hr/yr as shown in Table 4-13. To assess the

magnitude of submersion dose, the values in Table 4-13 were multiplied by the effective dose coefficient for air submersion (Eckerman and Ryman 1993). The results of the assessment indicate that the annual effective submersion dose from all radionuclides in Mound effluents is less than  $5.0 \times 10^{-10}$  Sv (<1 mrem) in any year during Mound operations. Consequently, dose reconstructors need not consider submersion dose from effluents.

#### **4.2.5 Resuspension Intakes, Submersion External Exposures, and Ground Layer External Exposures Attributed to Soil Contamination**

This analysis estimated the intake of radionuclides resuspended from soil at the Mound facility using a site-wide average profile of radionuclide soil concentrations measured in 30-cm-thick soil samples (Lyons 2003). The analysis assumes that all the soil samples were obtained in 1990. In addition, the claimant favorable assumption that the soil contamination is due to a combination of spills, pipeline breaks and effluent deposition in 1949 has been made. As a result, 1990 radionuclide concentrations were decay-corrected to obtain radionuclide activities present in 1949, 1950, 1955, 1960, 1965, 1970, 1975, 1980 and 1985 to provide an estimate of radiological conditions for each time period (see Tables 4-14 through 4-19). No decay correction has been applied to radionuclides with a relatively long half-life or radionuclide progeny in secular equilibrium with a long-lived parent radionuclide present in the soil. Plutonium and Americium soil contamination from SRS feed material is assumed to be present beginning in 1960.

Because there is no  $^{210}\text{Po}$  soil data available, the  $^{210}\text{Po}$  soil concentrations in Tables 4-14 through 4-19 were inferred based on the relationship between the sum of  $^{238}\text{Pu}$  effluent from 1960 to 1983 (362,670 uCi) and the decay corrected soil concentration of  $^{238}\text{Pu}$  in 1960 (2160.8 Bq/Kg). The resulting ratio of  $5.96\text{E-}03$  Bq/Kg per uCi emitted was applied to the 1949 through 1974 annual  $^{210}\text{Po}$  emissions. To account for the build up and decay of  $^{210}\text{Po}$  in soil, 16% of the previous years  $^{210}\text{Po}$  soil concentration was added to the next consecutive years  $^{210}\text{Po}$  soil concentration starting in 1950, because after one year, only 16% of the original  $^{210}\text{Po}$  activity remains. The highest  $^{210}\text{Po}$  soil concentration within the time periods shown in Tables 4-14 through 4-19 has been used in the calculations. Because effluent emissions of  $^{210}\text{Po}$  at Mound ceased in 1974,  $^{210}\text{Po}$  soil contamination is assumed to have decayed by 1975.

The mean soil concentrations ( $\text{pCi g}^{-1}$ ) were converted to resuspension concentrations using the four-factor formula in ORAUT (2005, equation 3-3). Resuspension air concentrations were used to calculate (1) external exposures by submersion and (2) submersion (resuspension) intakes (Bq) by multiplying the air concentrations by 2,000 h/yr and using a breathing rate of  $2,400 \text{ m}^3/\text{y}$  for inhalation intake. Resuspension intakes for  $^3\text{H}$ ,  $^{238}\text{Pu}$ ,  $^{239,240}\text{Pu}$  and  $^{210}\text{Po}$  intakes were not calculated because the derivation of the inhalation intakes presented in Table 4-9 already accounts for soil resuspension intakes at the Mound site. The results are listed in Tables 4-14 through 4-19 and are applicable (persist) for the periods indicated.

The external submersion and submersion (resuspension) intakes are presented in Tables 4-14 through 4-19. The annual external submersion dose and submersion (resuspension) intake doses due to contaminated soil are less than 1 mrem annually and can be neglected for dose reconstruction.

Estimates of external exposure from radionuclides present in soil at the Mound facility were made using the same site-wide average decay corrected profile of radionuclides included in the resuspension intake estimates. Soil mass activity concentrations were converted to equivalent volume activity concentrations using a soil density of  $1,600 \text{ kg/m}^3$  and exposure duration of 2,000 h/yr to derive soil layer external exposures. These results, (listed in Tables 4-14 through 4-19), are applicable to the radionuclides and periods applied to the resuspension intake assessment. Table 4-20 summarizes the annual mean site-wide external exposure results for the Mound site.



Table 4-13. Annual average effluent submersion external exposures at Mound by year and radionuclide (Bq s<sup>-3</sup>).

Year	<sup>238</sup> Pu	<sup>210</sup> Po	HTO	<sup>236</sup> Pu	<sup>239,240</sup> Pu	<sup>242</sup> Pu	<sup>241</sup> Pu	<sup>234</sup> U	<sup>237</sup> Np	<sup>241</sup> Am	<sup>231</sup> Pa	<sup>232</sup> Th	<sup>235</sup> U	<sup>238</sup> U	<sup>227</sup> Ac	
2003	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	
2002	1.14E+00	--	9.32E+05	4.40E-06	6.13E-02	3.29E-07	5.15E-02	9.81E-07	1.76E-08	1.42E-04	3.92E-08	2.00E-02	1.86E-05	1.79E-12	5.37E-11	6.01E-05
2001	1.07E+00	--	1.29E+06	4.12E-06	7.99E-03	3.08E-07	4.82E-02	9.19E-07	1.65E-08	1.33E-04	3.67E-08	5.99E-01	1.74E-05	1.68E-12	5.03E-11	5.63E-05
2000	1.09E+00	--	6.07E+05	4.19E-06	4.53E-02	3.13E-07	4.91E-02	9.36E-07	1.67E-08	1.36E-04	3.74E-08	7.75E-01	1.77E-05	1.71E-12	5.12E-11	5.72E-05
1999	3.81E-01	--	2.25E+06	1.47E-06	4.00E-02	1.10E-07	1.72E-02	3.28E-07	5.87E-09	4.76E-05	1.31E-08	1.18E+00	6.20E-06	5.99E-13	1.80E-11	2.01E-05
1998	1.36E+00	--	2.68E+06	5.25E-06	1.86E-02	3.93E-07	6.15E-02	1.17E-06	2.10E-08	1.70E-04	4.68E-08	4.80E-02	2.22E-05	2.14E-12	6.41E-11	7.17E-05
1997	5.49E+00	--	1.92E+06	2.12E-05	1.77E-01	1.58E-06	2.48E-01	4.72E-06	8.45E-08	6.85E-04	1.89E-07	5.70E-01	8.94E-05	8.63E-12	2.59E-10	2.89E-04
1996	1.58E+00	--	1.85E+06	6.11E-06	2.13E-02	4.56E-07	7.15E-02	1.36E-06	2.44E-08	1.98E-04	5.44E-08	1.26E-13	2.58E-05	2.49E-12	7.46E-11	8.33E-05
1995	1.60E+00	--	5.62E+05	6.16E-06	3.20E-02	4.60E-07	7.21E-02	1.37E-06	2.46E-08	1.99E-04	5.49E-08	1.27E-13	2.60E-05	2.51E-12	7.52E-11	8.41E-05
1994	1.94E+02	--	9.83E+05	7.50E-04	8.26E-02	5.60E-05	8.77E+00	1.67E-04	2.99E-06	2.43E-02	6.68E-06	1.55E-11	3.16E-03	3.06E-10	9.15E-09	1.02E-02
1993	1.89E+00	--	1.11E+06	7.30E-06	1.04E-01	5.46E-07	8.54E-02	1.63E-06	2.91E-08	2.36E-04	6.50E-08	1.51E-13	3.08E-05	2.98E-12	8.91E-11	9.96E-05
1992	1.55E+00	--	1.98E+06	5.99E-06	6.39E-02	4.48E-07	7.01E-02	1.34E-06	2.39E-08	1.94E-04	5.34E-08	1.24E-13	2.53E-05	2.44E-12	7.32E-11	8.18E-05
1991	2.05E+00	--	3.10E+06	7.92E-06	0.00E+00	5.92E-07	9.26E-02	1.77E-06	3.16E-08	2.56E-04	7.05E-08	1.64E-13	3.34E-05	3.23E-12	9.67E-11	1.08E-04
1990	1.50E+00	--	4.95E+06	5.80E-06	1.86E-02	4.33E-07	6.79E-02	1.29E-06	2.31E-08	1.88E-04	5.17E-08	1.20E-13	2.45E-05	2.36E-12	7.08E-11	7.91E-05
1989	4.00E+00	--	6.66E+06	1.54E-05	7.99E-02	1.15E-06	1.80E-01	3.44E-06	6.16E-08	4.99E-04	1.37E-07	3.19E-13	6.51E-05	6.29E-12	1.88E-10	2.10E-04
1988	1.55E+01	--	6.42E+06	5.96E-05	5.33E-02	4.46E-06	6.98E-01	1.33E-05	2.38E-07	1.93E-03	5.31E-07	1.23E-12	2.52E-04	2.43E-11	7.28E-10	8.14E-04
1987	1.16E+01	--	8.87E+06	4.47E-05	4.26E-02	3.34E-06	5.23E-01	9.97E-06	1.79E-07	1.45E-03	3.98E-07	9.26E-13	1.89E-04	1.82E-11	5.46E-10	6.10E-04
1986	2.49E+01	--	5.67E+06	9.60E-05	1.20E-01	7.18E-06	1.12E+00	2.14E-05	3.83E-07	3.11E-03	8.55E-07	1.99E-12	4.05E-04	3.91E-11	1.17E-09	1.31E-03
1985	3.36E+01	--	7.27E+06	1.30E-04	1.68E-01	9.68E-06	1.52E+00	2.89E-05	5.17E-07	4.19E-03	1.15E-06	2.68E-12	5.47E-04	5.28E-11	1.58E-09	1.77E-03
1984	6.18E+00	--	5.89E+06	2.39E-05	7.99E-02	1.78E-06	2.79E-01	5.32E-06	9.52E-08	7.72E-04	2.12E-07	4.94E-13	1.01E-04	9.72E-12	2.91E-10	3.26E-04
1983	3.52E+00	--	9.14E+06	1.36E-05	3.46E-01	1.01E-06	1.59E-01	3.03E-06	5.42E-08	4.39E-04	1.21E-07	2.81E-13	5.73E-05	5.53E-12	1.66E-10	1.85E-04
1982	6.37E+00	--	1.05E+07	2.46E-05	0.00E+00	1.84E-06	2.88E-01	5.48E-06	9.81E-08	7.95E-04	2.19E-07	5.09E-13	1.04E-04	1.00E-11	3.00E-10	3.35E-04
1981	5.51E+00	--	1.80E+07	2.13E-05	0.00E+00	1.59E-06	2.49E-01	4.75E-06	8.49E-08	6.89E-04	1.90E-07	4.41E-13	8.98E-05	8.68E-12	2.60E-10	2.90E-04
1980	2.34E+00	--	2.37E+07	9.05E-06	1.60E-01	6.76E-07	1.06E-01	2.02E-06	3.61E-08	2.93E-04	8.06E-08	1.87E-13	3.82E-05	3.69E-12	1.10E-10	1.23E-04
1979	4.26E+00	--	2.29E+06	1.65E-05	1.33E-01	1.23E-06	1.92E-01	3.67E-06	6.57E-08	5.32E-04	1.47E-07	3.41E-13	6.94E-05	6.71E-12	2.01E-10	2.25E-04
1978	6.66E+00	--	1.65E+06	2.57E-05	1.07E+00	1.92E-06	3.01E-01	5.73E-06	1.03E-07	8.32E-04	2.29E-07	5.32E-13	1.08E-04	1.05E-11	3.14E-10	3.51E-04
1977	7.46E+00	--	4.26E+06	2.88E-05	0.00E+00	2.15E-06	3.37E-01	6.42E-06	1.15E-07	9.32E-04	2.56E-07	5.96E-13	1.21E-04	1.17E-11	3.51E-10	3.93E-04
1976	2.24E+01	--	5.33E+06	8.64E-05	5.86E-01	6.45E-06	1.01E+00	1.93E-05	3.45E-07	2.80E-03	7.69E-07	1.79E-12	3.64E-04	3.52E-11	1.05E-09	1.18E-03
1975	1.70E+01	--	7.73E+06	6.58E-05	7.99E-01	4.92E-06	7.70E-01	1.47E-05	2.63E-07	2.13E-03	5.86E-07	1.36E-12	2.78E-04	2.68E-11	8.03E-10	8.98E-04
1974	5.01E+01	2.93E+02	4.08E+07	1.93E-04	1.61E+00	1.45E-05	2.26E+00	4.31E-05	7.72E-07	6.26E-03	1.72E-06	4.00E-12	8.16E-04	7.88E-11	2.36E-09	2.64E-03
1973	4.16E+01	3.04E+02	1.97E+07	1.60E-04	1.34E+00	1.20E-05	1.88E+00	3.58E-05	6.41E-07	5.19E-03	1.43E-06	3.32E-12	6.77E-04	6.54E-11	1.96E-09	2.19E-03
1972	3.73E+01	3.46E+02	2.18E+07	1.44E-04	1.20E+00	1.08E-05	1.68E+00	3.21E-05	5.75E-07	4.66E-03	1.28E-06	2.98E-12	6.07E-04	5.87E-11	1.76E-09	1.96E-03
1971	1.07E+02	1.07E+03	1.44E+09	4.11E-04	3.43E+00	3.07E-05	4.81E+00	9.17E-05	1.64E-06	1.33E-02	3.66E-06	8.51E-12	1.74E-03	1.68E-10	5.02E-09	5.61E-03
1970	3.16E+03	5.18E+04	3.88E+08	1.22E-02	1.02E+02	9.11E-04	1.43E+02	2.72E-03	4.86E-05	3.94E-01	1.09E-04	2.52E-10	5.14E-02	4.97E-09	1.49E-07	1.66E-01
1969	7.67E+03	7.20E+04	6.82E+08	2.96E-02	2.47E+02	2.21E-03	3.46E+02	6.60E-03	1.18E-04	9.58E-01	2.64E-04	6.13E-10	1.25E-01	1.21E-08	3.61E-07	4.04E-01
1968	4.16E+03	9.44E+04	5.96E+08	1.61E-02	1.34E+02	1.20E-03	1.88E+02	3.58E-03	6.41E-05	5.19E-01	1.43E-04	3.32E-10	6.77E-02	6.54E-09	1.96E-07	2.19E-01
1967	3.95E+04	3.64E+05	7.88E+08	1.53E-01	1.27E+03	1.14E-02	1.78E+03	3.40E-02	6.09E-04	4.94E+00	1.36E-03	3.16E-09	6.44E-01	6.22E-08	1.86E-06	2.08E+00
1966	2.21E+04	3.38E+05	4.31E+08	8.54E-02	7.13E+02	6.38E-03	1.00E+03	1.91E-02	3.41E-04	2.76E+00	7.61E-04	1.77E-09	3.60E-01	3.48E-08	1.04E-06	1.17E+00
1965	4.22E+03	2.81E+05	4.47E+08	1.63E-02	1.36E+02	1.22E-03	1.91E+02	3.63E-03	6.50E-05	5.27E-01	1.45E-04	3.37E-10	6.87E-02	6.64E-09	1.99E-07	2.22E-01
1964	1.83E+02	2.34E+05	5.68E+08	7.07E-04	5.90E+00	5.28E-05	8.27E+00	1.58E-04	2.82E-06	2.29E-02	6.30E-06	1.46E-11	2.98E-03	2.88E-10	8.63E-09	9.65E-03
1963	7.85E+01	1.95E+05	6.79E+08	3.03E-04	2.53E+00	2.26E-05	3.55E+00	6.76E-05	1.21E-06	9.81E-03	2.70E-06	6.27E-12	1.28E-03	1.24E-10	3.70E-09	4.14E-03
1962	1.02E+02	1.63E+05	5.29E+08	3.93E-04	3.28E+00	2.94E-05	4.60E+00	8.76E-05	1.57E-06	1.27E-02	3.50E-06	8.13E-12	1.66E-03	1.60E-10	4.80E-09	5.36E-03
1961	1.16E+02	1.36E+05	5.20E+08	4.49E-04	3.75E+00	3.36E-05	5.25E+00	1.00E-04	1.79E-06	1.45E-02	4.00E-06	9.30E-12	1.89E-03	1.83E-10	5.48E-09	6.13E-03
1960	1.82E+05	1.13E+05	2.21E+08	7.02E-01	5.86E+03	5.25E-02	8.21E+03	1.57E-01	2.80E-03	2.27E+01	6.25E-03	1.45E-08	2.96E+00	2.86E-07	8.57E-06	9.58E+00
1959	--	9.42E+04	6.82E+07	--	--	--	--	--	--	--	--	--	--	--	--	--
1958	--	7.85E+04	6.20E+07	--	--	--	--	--	--	--	--	--	--	--	--	--
1957	--	6.54E+04	5.63E+07	--	--	--	--	--	--	--	--	--	--	--	--	--
1956	--	5.45E+04	5.12E+07	--	--	--	--	--	--	--	--	--	--	--	--	--
1955	--	4.54E+04	4.66E+07	--	--	--	--	--	--	--	--	--	--	--	--	--
1954	--	3.79E+04	4.23E+07	--	--	--	--	--	--	--	--	--	--	--	--	--
1953	--	3.16E+04	--	--	--	--	--	--	--	--	--	--	--	--	--	--
1952	--	3.16E+04	--	--	--	--	--	--	--	--	--	--	--	--	--	--
1951	--	3.16E+04	--	--	--	--	--	--	--	--	--	--	--	--	--	--
1950	--	3.16E+04	--	--	--	--	--	--	--	--	--	--	--	--	--	--
1949	--	3.16E+04	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Table 4-14. Annual average ground layer external exposure, resuspension submersion external exposure, and resuspension submersion intake at Mound by radionuclide, 1990 to present.

Nuclide	Half-life (yr)	Mean soil (Bq/kg)	Airborne (Bq/m <sup>3</sup> )	Submersion intake (Bq) <sup>a</sup>	ICRP (1995) DCF (Sv/Bq)	Submersion intake dose (Sv)	External submersion (Bq s/m <sup>3</sup> ) <sup>a</sup>	Sv/(Bq s/m <sup>3</sup> ) effective DCF	Submersion effective dose (Sv)	Soil layer <sup>b</sup> (Bq s/m <sup>3</sup> ) <sup>a</sup>	Infinite thickness DCF Sv/(Bq s/m <sup>3</sup> )	Soil exposure dose (Sv/yr)
Ac-227	2.18E+01	12.58	1.61E-06	3.86E-03	6.30E-04	2.43E-06	1.16E+01	5.82E-18	6.75E-17	1.45E+11	2.65E-21	3.84E-10
Th-227	5.12E-02	12.58	1.61E-06	3.86E-03	7.60E-06	2.94E-08	1.16E+01	4.88E-15	5.66E-14	1.45E+11	2.79E-18	4.04E-07
Am-241	4.32E+02	4.81	6.16E-07	1.48E-03	2.70E-05	3.99E-08	4.43E+00	8.18E-16	3.63E-15	5.54E+10	2.34E-19	1.30E-08
Pu-238	8.78E+01	1,705.70	2.18E-04	c	3.00E-05	c	1.57E+03	4.88E-18	7.67E-15	1.96E+13	8.10E-22	1.59E-08
Pu-239, 240	2.41E+04	1.11	1.42E-07	c	3.20E-05	c	1.02E+00	4.75E-18	4.86E-18	1.28E+10	1.58E-21	2.02E-11
Pu-241	1.44E+01	440.30	5.64E-05	1.35E-01	5.80E-07	7.85E-08	4.06E+02	7.25E-20	2.94E-17	5.07E+12	3.16E-23	1.60E-10
Co-60	5.27E+00	3.33	4.26E-07	1.02E-03	1.70E-08	1.74E-11	3.07E+00	1.26E-13	3.87E-13	3.84E+10	8.68E-17	3.33E-06
Pa-231	3.28E+04	42.18	5.40E-06	1.30E-02	8.90E-05	1.15E-06	3.89E+01	1.72E-15	6.69E-14	4.86E+11	1.02E-18	4.96E-07
Th-230	7.70E+04	110.26	1.41E-05	3.39E-02	2.80E-05	9.48E-07	1.02E+02	1.74E-17	1.77E-15	1.27E+12	6.47E-21	8.22E-09
Th-232	1.41E+10	51.06	6.54E-06	1.57E-02	2.90E-05	4.55E-07	4.71E+01	8.72E-18	4.10E-16	5.88E+11	2.79E-21	1.64E-09
Ac-228	6.99E-04	37.37	4.78E-06	1.15E-02	2.90E-08	3.33E-10	3.44E+01	4.78E-14	1.65E-12	4.31E+11	3.20E-17	1.38E-05
Ra-228	5.76E+00	37.37	4.78E-06	1.15E-02	1.70E-06	1.95E-08	3.44E+01	0.00E+00	0.00E+00	4.31E+11	0.00E+00	0.00E+00
Bi-207	3.22E+01	2.22	2.84E-07	6.82E-04	3.20E-09	2.18E-12	2.05E+00	7.54E-14	1.54E-13	2.56E+10	5.02E-17	1.28E-06
Bi-210	1.37E-02	2.96	3.79E-07	9.09E-04	6.00E-08	5.46E-11	2.73E+00	3.29E-17	8.97E-17	3.41E+10	1.93E-20	6.58E-10
Bi-210m	3.00E+06	2.96	3.79E-07	9.09E-04	2.10E-06	1.91E-09	2.73E+00	1.22E-14	3.33E-14	3.41E+10	7.37E-18	2.51E-07
Bi-241	3.78E-05	28.86	3.69E-06	8.87E-03	2.10E-08	1.86E-10	2.66E+01	7.65E-14	2.03E-12	3.32E+11	5.25E-17	1.75E-05
Ra-226	1.60E+03	48.10	6.16E-06	1.48E-02	2.20E-06	3.25E-08	4.43E+01	3.15E-16	1.40E-14	5.54E+11	1.70E-19	9.42E-08
Cs-137	3.02E+01	8.88	1.14E-06	2.73E-03	6.70E-09	1.83E-11	8.18E+00	7.74E-18	6.33E-17	1.02E+11	4.02E-21	4.11E-10
Ba-137m	8.08E-08	8.88	1.14E-06	2.73E-03	See Cs-137	See Cs-137	8.18E+00	2.88E-14	2.36E-13	1.02E+11	1.93E-17	1.97E-06
Eu-152	1.34E+01	3.33	4.26E-07	1.02E-03	2.70E-08	2.76E-11	3.07E+00	5.65E-14	1.73E-13	3.84E+10	3.75E-17	1.44E-06
Eu-154	8.50E+00	4.44	5.68E-07	1.36E-03	3.50E-08	4.77E-11	4.09E+00	6.14E-14	2.51E-13	5.11E+10	4.11E-17	2.10E-06
Np-237	2.14E+06	0.74	9.47E-08	2.27E-04	1.50E-05	3.41E-09	6.82E-01	1.03E-15	7.02E-16	8.52E+09	4.17E-19	3.55E-09
Pu-242	3.76E+05	1.11	1.42E-07	3.41E-04	3.10E-05	1.06E-08	1.02E+00	4.01E-18	4.10E-18	1.28E+10	6.85E-22	8.76E-12
Sr-90	2.86E+01	26.64	3.41E-06	8.18E-03	7.70E-08	6.30E-10	2.46E+01	7.53E-18	1.85E-16	3.07E+11	3.77E-21	1.16E-09
Y-90	7.30E-03	26.64	3.41E-06	8.18E-03	1.70E-09	1.39E-11	2.46E+01	1.90E-16	4.66E-15	3.07E+11	1.28E-19	3.93E-08
Tc-99	2.13E+05	50.32	6.44E-06	1.55E-02	3.20E-09	4.95E-11	4.64E+01	1.62E-18	7.51E-17	5.80E+11	6.72E-22	3.90E-10
H-3	1.23E+01	105.08	1.35E-05	c	4.50E-11	c	9.68E+01	3.31E-19	3.21E-17	1.21E+12	0.00E+00	0.00E+00
Total						5.21E-06			5.07E-12			4.27E-05

a. Based on exposure duration of 2,000 hr<sup>1</sup>.

b. Uppermost 30 cm of soil layer [adapted from Lyons (2003)].

c. H-3, Pu-238 and Pu-239 resuspension taken into account in derivation of effluent intakes

Table 4-15. Annual average ground layer external exposure, resuspension submersion external exposure, and resuspension submersion intake at Mound by radionuclide, 1980 through 1989.

Nuclide	Half-life (yr)	Mean soil (Bq/kg)	Airborne (Bq/m <sup>3</sup> )	Submersion intake (Bq) <sup>a</sup>	ICRP (1995) DCF (Sv/Bq)	Submersion intake dose (Sv)	External submersion (Bq s/m <sup>3</sup> ) <sup>a</sup>	Sv/(Bq s m <sup>-3</sup> ) effective DCF	Effective dose (Sv)	Soil layer <sup>b</sup> (Bq s/m <sup>3</sup> ) <sup>a</sup>	Infinite thickness DCF Sv/(Bq s/m <sup>3</sup> )	Soil exposure dose (Sv/yr)
Ac-227	2.18E+01	12.58	1.61E-06	3.86E-03	6.30E-04	2.43E-06	1.16E+01	5.82E-18	6.75E-17	1.45E+11	2.65E-21	3.84E-10
Th-227	5.12E-02	12.58	1.61E-06	3.86E-03	7.60E-06	2.94E-08	1.16E+01	4.88E-15	5.66E-14	1.45E+11	2.79E-18	4.04E-07
Am-241	4.32E+02	4.81	6.16E-07	1.48E-03	2.70E-05	3.99E-08	4.43E+00	8.18E-16	3.63E-15	5.54E+10	2.34E-19	1.30E-08
Pu-238	8.78E+01	1,846.30	2.36E-04	c	3.00E-05	c	1.70E+03	4.88E-18	8.30E-15	2.13E+13	8.10E-22	1.72E-08
Pu-239, 240	2.41E+04	1.11	1.42E-07	c	3.20E-05	c	1.02E+00	4.75E-18	4.86E-18	1.28E+10	1.58E-21	2.02E-11
Pu-241	1.44E+01	714.10	9.14E-05	2.19E-01	5.80E-07	1.27E-07	6.58E+02	7.25E-20	4.77E-17	8.23E+12	3.16E-23	2.60E-10
Co-60	5.27E+00	12.40	1.59E-06	3.81E-03	1.70E-08	6.47E-11	1.14E+01	1.26E-13	1.44E-12	1.43E+11	8.68E-17	1.24E-05
Pa-231	3.28E+04	42.18	5.40E-06	1.30E-02	8.90E-05	1.15E-06	3.89E+01	1.72E-15	6.69E-14	4.86E+11	1.02E-18	4.96E-07
Th-230	7.70E+04	110.26	1.41E-05	3.39E-02	2.80E-05	9.48E-07	1.02E+02	1.74E-17	1.77E-15	1.27E+12	6.47E-21	8.22E-09
Th-232	1.41E+10	51.06	6.54E-06	1.57E-02	2.90E-05	4.55E-07	4.71E+01	8.72E-18	4.10E-16	5.88E+11	2.79E-21	1.64E-09
Ac-228	6.99E-04	37.37	4.78E-06	1.15E-02	2.90E-08	3.33E-10	3.44E+01	4.78E-14	1.65E-12	4.31E+11	3.20E-17	1.38E-05
Ra-228	5.76E+00	37.37	4.78E-06	1.15E-02	1.70E-06	1.95E-08	3.44E+01	0.00E+00	0.00E+00	4.31E+11	0.00E+00	0.00E+00
Bi-207	3.22E+01	2.75	3.52E-07	8.46E-04	3.20E-09	2.71E-12	2.54E+00	7.54E-14	1.91E-13	3.17E+10	5.02E-17	1.59E-06
Bi-210	1.37E-02	2.96	3.79E-07	9.09E-04	6.00E-08	5.46E-11	2.73E+00	3.29E-17	8.97E-17	3.41E+10	1.93E-20	6.58E-10
Bi-210m	3.00E+06	2.96	3.79E-07	9.09E-04	2.10E-06	1.91E-09	2.73E+00	1.22E-14	3.33E-14	3.41E+10	7.37E-18	2.51E-07
Bi-241	3.78E-05	28.86	3.69E-06	8.87E-03	2.10E-08	1.86E-10	2.66E+01	7.65E-14	2.03E-12	3.32E+11	5.25E-17	1.75E-05
Ra-226	1.60E+03	48.10	6.16E-06	1.48E-02	2.20E-06	3.25E-08	4.43E+01	3.15E-16	1.40E-14	5.54E+11	1.70E-19	9.42E-08
Cs-137	3.02E+01	11.17	1.43E-06	3.43E-03	6.70E-09	2.30E-11	1.03E+01	7.74E-18	7.97E-17	1.29E+11	4.02E-21	5.17E-10
Ba-137m	8.08E-08	11.17	1.43E-06	3.43E-03	See Cs-137	See Cs-137	1.03E+01	2.88E-14	2.97E-13	1.29E+11	1.93E-17	2.48E-06
Eu-152	1.34E+01	5.59	7.15E-07	1.72E-03	2.70E-08	4.63E-11	5.15E+00	5.65E-14	2.91E-13	6.44E+10	3.75E-17	2.41E-06
Eu-154	8.50E+00	10.03	1.28E-06	3.08E-03	3.50E-08	1.08E-10	9.24E+00	6.14E-14	5.67E-13	1.16E+11	4.11E-17	4.75E-06
Np-237	2.14E+06	0.74	9.47E-08	2.27E-04	1.50E-05	3.41E-09	6.82E-01	1.03E-15	7.02E-16	8.52E+09	4.17E-19	3.55E-09
Pu-242	3.76E+05	1.11	1.42E-07	3.41E-04	3.10E-05	1.06E-08	1.02E+00	4.01E-18	4.10E-18	1.28E+10	6.85E-22	8.76E-12
Sr-90	2.86E+01	33.93	4.34E-06	1.04E-02	7.70E-08	8.03E-10	3.13E+01	7.53E-18	2.35E-16	3.91E+11	3.77E-21	1.47E-09
Y-90	7.30E-03	33.93	4.34E-06	1.04E-02	1.70E-09	1.77E-11	3.13E+01	1.90E-16	5.94E-15	3.91E+11	1.28E-19	5.00E-08
Tc-99	2.13E+05	50.32	6.44E-06	1.55E-02	3.20E-09	4.95E-11	4.64E+01	1.62E-18	7.51E-17	5.80E+11	6.72E-22	3.90E-10
H-3	1.23E+01	184.63	2.36E-05	c	4.50E-11	c	1.70E+02	3.31E-19	5.63E-17	2.13E+12	0.00E+00	0.00E+00
Total						5.26E-06			6.66E-12			5.62E-05

- a. Based on an exposure duration of 2,000 h/yr.  
b. Uppermost 30 cm of soil layer [adapted from Lyons (2003)].  
c. H-3, Pu-238 and Pu-239 resuspension taken into account in derivation of effluent intakes

Table 4-16. Annual average ground layer external exposure, resuspension submersion external exposure, and resuspension submersion intake at Mound by radionuclide, 1970 through 1979.

Nuclide	Half-life (yr)	Mean soil (Bq/kg)	Airborne (Bq/m <sup>3</sup> )	Submersion intake (Bq) <sup>a</sup>	ICRP (1995) DCF (Sv/Bq)	Submersion intake dose (Sv)	External submersion (Bq s/m <sup>3</sup> ) <sup>a</sup>	Sv/(Bq s m <sup>-3</sup> ) effective DCF	Effective dose (Sv)	Soil layer <sup>b</sup> (Bq s/m <sup>3</sup> ) <sup>a</sup>	Infinite thickness DCF Sv/(Bq s/m <sup>3</sup> )	Soil exposure dose (Sv/yr)
Ac-227	2.18E+01	12.58	1.61E-06	3.86E-03	6.30E-04	2.43E-06	1.16E+01	5.82E-18	6.75E-17	1.45E+11	2.65E-21	3.84E-10
Th-227	5.12E-02	12.58	1.61E-06	3.86E-03	7.60E-06	2.94E-08	1.16E+01	4.88E-15	5.66E-14	1.45E+11	2.79E-18	4.04E-07
Am-241	4.32E+02	4.81	6.16E-07	1.48E-03	2.70E-05	3.99E-08	4.43E+00	8.18E-16	3.63E-15	5.54E+10	2.34E-19	1.30E-08
Pu-238	8.78E+01	1,998.00	2.56E-04	c	3.00E-05	c	1.84E+03	4.88E-18	8.99E-15	2.30E+13	8.10E-22	1.86E-08
Pu-239, 240	2.41E+04	1.11	1.42E-07	c	3.20E-05	c	1.02E+00	4.75E-18	4.86E-18	1.28E+10	1.58E-21	2.02E-11
Pu-241	1.44E+01	1,158.10	1.48E-04	3.56E-01	5.80E-07	2.06E-07	1.07E+03	7.25E-20	7.74E-17	1.33E+13	3.16E-23	4.22E-10
Co-60	5.27E+00	46.25	5.92E-06	1.42E-02	1.70E-08	2.42E-10	4.26E+01	1.26E-13	5.37E-12	5.33E+11	8.68E-17	4.62E-05
Pa-231	3.28E+04	42.18	5.40E-06	1.30E-02	8.90E-05	1.15E-06	3.89E+01	1.72E-15	6.69E-14	4.86E+11	1.02E-18	4.96E-07
Th-230	7.70E+04	110.26	1.41E-05	3.39E-02	2.80E-05	9.48E-07	1.02E+02	1.74E-17	1.77E-15	1.27E+12	6.47E-21	8.22E-09
Th-232	1.41E+10	51.06	6.54E-06	1.57E-02	2.90E-05	4.55E-07	4.71E+01	8.72E-18	4.10E-16	5.88E+11	2.79E-21	1.64E-09
Ac-228	6.99E-04	37.37	4.78E-06	1.15E-02	2.90E-08	3.33E-10	3.44E+01	4.78E-14	1.65E-12	4.31E+11	3.20E-17	1.38E-05
<sup>228</sup> 228	5.76E+00	37.37	4.78E-06	1.15E-02	1.70E-06	1.95E-08	3.44E+01	0.00E+00	0.00E+00	4.31E+11	0.00E+00	0.00E+00
Bi-207	3.22E+01	3.42	4.37E-07	1.05E-03	3.20E-09	3.36E-12	3.15E+00	7.54E-14	2.37E-13	3.93E+10	5.02E-17	1.97E-06
Bi-210	1.37E-02	2.96	3.79E-07	9.09E-04	6.00E-08	5.46E-11	2.73E+00	3.29E-17	8.97E-17	3.41E+10	1.93E-20	6.58E-10
Bi-210m	3.00E+06	2.96	3.79E-07	9.09E-04	2.10E-06	1.91E-09	2.73E+00	1.22E-14	3.33E-14	3.41E+10	7.37E-18	2.51E-07
Bi-214	3.78E-05	28.86	3.69E-06	8.87E-03	2.10E-08	1.86E-10	2.66E+01	7.65E-14	2.03E-12	3.32E+11	5.25E-17	1.75E-05
R-226	1.60E+03	48.10	6.16E-06	1.48E-02	2.20E-06	3.25E-08	4.43E+01	3.15E-16	1.40E-14	5.54E+11	1.70E-19	9.42E-08
Cs-137	3.02E+01	14.06	1.80E-06	4.32E-03	6.70E-09	2.89E-11	1.30E+01	7.74E-18	1.00E-16	1.62E+11	4.02E-21	6.51E-10
Ba-137m	8.08E-08	14.06	1.80E-06	4.32E-03	See Cs-137	See Cs-137	1.30E+01	2.88E-14	3.73E-13	1.62E+11	1.93E-17	3.13E-06
Eu-152	1.34E+01	9.36	1.20E-06	2.88E-03	2.70E-08	7.76E-11	8.63E+00	5.65E-14	4.87E-13	1.08E+11	3.75E-17	4.04E-06
Eu-154	8.50E+00	22.68	2.90E-06	6.97E-03	3.50E-08	2.44E-10	2.09E+01	6.14E-14	1.28E-12	2.61E+11	4.11E-17	1.07E-05
Np-237	2.14E+06	0.74	9.47E-08	2.27E-04	1.50E-05	3.41E-09	6.82E-01	1.03E-15	7.02E-16	8.52E+09	4.17E-19	3.55E-09
Pu-142	3.76E+05	1.11	1.42E-07	3.41E-04	3.10E-05	1.06E-08	1.02E+00	4.01E-18	4.10E-18	1.28E+10	6.85E-22	8.76E-12
Sr-90	2.86E+01	43.29	5.54E-06	1.33E-02	7.70E-08	1.02E-09	3.99E+01	7.53E-18	3.00E-16	4.99E+11	3.77E-21	1.88E-09
Y-90	7.30E-03	43.29	5.54E-06	1.33E-02	1.70E-09	2.26E-11	3.99E+01	1.90E-16	7.58E-15	4.99E+11	1.28E-19	6.38E-08
Tc-99	2.13E+05	50.32	6.44E-06	1.55E-02	3.20E-09	4.95E-11	4.64E+01	1.62E-18	7.51E-17	5.80E+11	6.72E-22	3.90E-10
H-3	1.23E+01	324.49	4.15E-05	c	4.50E-11	c	2.99E+02	3.31E-19	9.90E-17	3.74E+12	0.00E+00	0.00E+00
Po-210	3.79E-01	78.07	9.99E-06	c	2.20E-06	c	7.19E+01	4.16E-19	2.99E-17	8.99E+11	2.80E-22	2.52E-10
Total						5.34E-06			1.16E-11			9.87E-05

a. Based on an exposure duration of 2,000 h/yr.

b. Uppermost 30 cm of soil layer [adapted from Lyons (2003)].

c. H-3, Pu-239, Pu-238 and Po-210 resuspension taken into account in derivation of effluent intakes

Table 4-17. Annual average ground layer external exposure, resuspension submersion external exposure, and resuspension submersion intake at Mound by radionuclide, 1960 through 1969.

Nuclide	Half-life (yr)	Mean soil (Bq/kg)	Airborne (Bq/m <sup>3</sup> )	Submersion intake (Bq) <sup>a</sup>	ICRP (1995) DCF (Sv/Bq)	Submersion intake dose (Sv)	External submersion (Bq s/m <sup>3</sup> ) <sup>a</sup>	Sv/(Bq s m <sup>-3</sup> ) effective DCF	Effective dose (Sv)	Soil layer <sup>b</sup> (Bq s/m <sup>3</sup> ) <sup>a</sup>	Infinite thickness DCF Sv/(Bq s/m <sup>3</sup> )	Soil exposure dose (Sv/yr)
Ac-227	2.18E+01	12.58	1.61E-06	3.86E-03	6.30E-04	2.43E-06	1.16E+01	5.82E-18	6.75E-17	1.45E+11	2.65E-21	3.84E-10
Th-227	5.12E-02	12.58	1.61E-06	3.86E-03	7.60E-06	2.94E-08	1.16E+01	4.88E-15	5.66E-14	1.45E+11	2.79E-18	4.04E-07
Am-241	4.32E+02	4.81	6.16E-07	1.48E-03	2.70E-05	3.99E-08	4.43E+00	8.18E-16	3.63E-15	5.54E+10	2.34E-19	1.30E-08
Pu-238	8.78E+01	2,160.80	2.77E-04	c	3.00E-05	c	1.99E+03	4.88E-18	9.72E-15	2.49E+13	8.10E-22	2.02E-08
Pu-239, 240	2.41E+04	1.11	1.42E-07	c	3.20E-05	c	1.02E+00	4.75E-18	4.86E-18	1.28E+10	1.58E-21	2.02E-11
Pu-241	1.44E+01	1,875.90	2.40E-04	5.76E-01	5.80E-07	3.34E-07	1.73E+03	7.25E-20	1.25E-16	2.16E+13	3.16E-23	6.83E-10
Co-60	5.27E+00	172.05	2.20E-05	5.29E-02	1.70E-08	8.99E-10	1.59E+02	1.26E-13	2.00E-11	1.98E+12	8.68E-17	1.72E-04
Pa-231	3.28E+04	42.18	5.40E-06	1.30E-02	8.90E-05	1.15E-06	3.89E+01	1.72E-15	6.69E-14	4.86E+11	1.02E-18	4.96E-07
Th-230	7.70E+04	110.26	1.41E-05	3.39E-02	2.80E-05	9.48E-07	1.02E+02	1.74E-17	1.77E-15	1.27E+12	6.47E-21	8.22E-09
Th-232	1.41E+10	51.06	6.54E-06	1.57E-02	2.90E-05	4.55E-07	4.71E+01	8.72E-18	4.10E-16	5.88E+11	2.79E-21	1.64E-09
Ac-228	6.99E-04	37.37	4.78E-06	1.15E-02	2.90E-08	3.33E-10	3.44E+01	4.78E-14	1.65E-12	4.31E+11	3.20E-17	1.38E-05
Ra-228	5.76E+00	37.37	4.78E-06	1.15E-02	1.70E-06	1.95E-08	3.44E+01	0.00E+00	0.00E+00	4.31E+11	0.00E+00	0.00E+00
Bi-207	3.22E+01	4.22	5.40E-07	1.30E-03	3.20E-09	4.15E-12	3.89E+00	7.54E-14	2.93E-13	4.86E+10	5.02E-17	2.44E-06
Bi-210	1.37E-02	2.96	3.79E-07	9.09E-04	6.00E-08	5.46E-11	2.73E+00	3.29E-17	8.97E-17	3.41E+10	1.93E-20	6.58E-10
Bi-10m	3.00E+06	2.96	3.79E-07	9.09E-04	2.10E-06	1.91E-09	2.73E+00	1.22E-14	3.33E-14	3.41E+10	7.37E-18	2.51E-07
Bi-214	3.78E-05	28.86	3.69E-06	8.87E-03	2.10E-08	1.86E-10	2.66E+01	7.65E-14	2.03E-12	3.32E+11	5.25E-17	1.75E-05
Ra-226	1.60E+03	48.10	6.16E-06	1.48E-02	2.20E-06	3.25E-08	4.43E+01	3.15E-16	1.40E-14	5.54E+11	1.70E-19	9.42E-08
Cs-137	3.02E+01	17.69	2.26E-06	5.43E-03	6.70E-09	3.64E-11	1.63E+01	7.74E-18	1.26E-16	2.04E+11	4.02E-21	8.19E-10
Ba-137m	8.08E-08	17.69	2.26E-06	5.43E-03	See Cs-137	See Cs-137	1.63E+01	2.88E-14	4.69E-13	2.04E+11	1.93E-17	3.93E-06
Eu-152	1.34E+01	15.73	2.01E-06	4.83E-03	2.70E-08	1.30E-10	1.45E+01	5.65E-14	8.19E-13	1.81E+11	3.75E-17	6.79E-06
Eu-154	8.50E+00	51.43	6.58E-06	1.58E-02	3.50E-08	5.53E-10	4.74E+01	6.14E-14	2.91E-12	5.92E+11	4.11E-17	2.44E-05
Np-237	2.14E+06	0.74	9.47E-08	2.27E-04	1.50E-05	3.41E-09	6.82E-01	1.03E-15	7.02E-16	8.52E+09	4.17E-19	3.55E-09
Pu-242	3.76E+05	1.11	1.42E-07	3.41E-04	3.10E-05	1.06E-08	1.02E+00	4.01E-18	4.10E-18	1.28E+10	6.85E-22	8.76E-12
Sr-90	2.86E+01	55.13	7.06E-06	1.69E-02	7.70E-08	1.30E-09	5.08E+01	7.53E-18	3.83E-16	6.35E+11	3.77E-21	2.39E-09
Y-90	7.30E-03	55.13	7.06E-06	1.69E-02	1.70E-09	2.88E-11	5.08E+01	1.90E-16	9.65E-15	6.35E+11	1.28E-19	8.13E-08
Tc-99	2.13E+05	50.32	6.44E-06	1.55E-02	3.20E-09	4.95E-11	4.64E+01	1.62E-18	7.51E-17	5.80E+11	6.72E-22	3.90E-10
H-3	1.23E+01	569.80	7.29E-05	1.75E-01	4.50E-11	7.88E-12	5.25E+02	3.31E-19	1.74E-16	6.56E+12	0.00E+00	0.00E+00
Po-210	3.79E-01	493	6.31E-05	c	2.20E-06	c	4.54E+02	4.16E-19	1.89E-16	5.68E+12	2.80E-22	1.59E-09
Total						5.47E-06			2.84E-11			2.43E-04

a. Based on an exposure duration of 2,000 h/yr.

b. Uppermost 30 cm of soil layer [adapted from Lyons (2003)].

c. H-3, Pu-239, Pu-238 and Po-210 resuspension taken into account in derivation of effluent intakes

Table 4-18. Annual average ground layer external exposure, resuspension submersion external exposure, and resuspension submersion intake at Mound by radionuclide, 1950 through 1959.

Nuclide	Half-life (yr)	Mean soil (Bq/kg)	Airborne (Bq/m <sup>3</sup> )	Submersion intake (Bq) <sup>a</sup>	ICRP (1995) DCF (Sv/Bq)	Submersion intake dose (Sv)	External submersion (Bq s/m <sup>3</sup> ) <sup>a</sup>	Sv/(Bq s m <sup>-3</sup> ) effective DCF	Effective dose (Sv)	Soil layer <sup>b</sup> (Bq s/m <sup>3</sup> ) <sup>a</sup>	Infinite thickness DCF Sv/(Bq s/m <sup>3</sup> )	Soil exposure dose (Sv/yr)
Ac-227	2.18E+01	12.58	1.61E-06	3.86E-03	6.30E-04	2.43E-06	1.16E+01	5.82E-18	6.75E-17	1.45E+11	2.65E-21	3.84E-10
Th-227	5.12E-02	12.58	1.61E-06	3.86E-03	7.60E-06	2.94E-08	1.16E+01	4.88E-15	5.66E-14	1.45E+11	2.79E-18	4.04E-07
Am-241 <sup>d</sup>	4.32E+02	--	--	--	--	--	--	--	--	--	--	--
Pu-238 <sup>d</sup>	--	--	--	--	--	--	--	--	--	--	--	--
Pu-239, 240 <sup>d</sup>	--	--	--	--	--	--	--	--	--	--	--	--
Pu-241 <sup>d</sup>	--	--	--	--	--	--	--	--	--	--	--	--
Co-60	5.27E+00	640.10	8.19E-05	1.97E-01	1.70E-08	3.34E-09	5.90E+02	1.26E-13	7.43E-11	7.37E+12	8.68E-17	6.40E-04
Pa-231	3.28E+04	42.18	5.40E-06	1.30E-02	8.90E-05	1.15E-06	3.89E+01	1.72E-15	6.69E-14	4.86E+11	1.02E-18	4.96E-07
Th-230	7.70E+04	110.26	1.41E-05	3.39E-02	2.80E-05	9.48E-07	1.02E+02	1.74E-17	1.77E-15	1.27E+12	6.47E-21	8.22E-09
Th-232	1.41E+10	51.06	6.54E-06	1.57E-02	2.90E-05	4.55E-07	4.71E+01	8.72E-18	4.10E-16	5.88E+11	2.79E-21	1.64E-09
Ac-228	6.99E-04	37.37	4.78E-06	1.15E-02	2.90E-08	3.33E-10	3.44E+01	4.78E-14	1.65E-12	4.31E+11	3.20E-17	1.38E-05
Ra-228	5.76E+00	37.37	4.78E-06	1.15E-02	1.70E-06	1.95E-08	3.44E+01	0.00E+00	0.00E+00	4.31E+11	0.00E+00	0.00E+00
Bi-207	3.22E+01	5.25	6.73E-07	1.61E-03	3.20E-09	5.16E-12	4.84E+00	7.54E-14	3.65E-13	6.05E+10	5.02E-17	3.04E-06
Bi-210	1.37E-02	2.96	3.79E-07	9.09E-04	6.00E-08	5.46E-11	2.73E+00	3.29E-17	8.97E-17	3.41E+10	1.93E-20	6.58E-10
Bi-210m	3.00E+06	2.96	3.79E-07	9.09E-04	2.10E-06	1.91E-09	2.73E+00	1.22E-14	3.33E-14	3.41E+10	7.37E-18	2.51E-07
Bi-214	3.78E-05	28.86	3.69E-06	8.87E-03	2.10E-08	1.86E-10	2.66E+01	7.65E-14	2.03E-12	3.32E+11	5.25E-17	1.75E-05
Ra-226	1.60E+03	48.10	6.16E-06	1.48E-02	2.20E-06	3.25E-08	4.43E+01	3.15E-16	1.40E-14	5.54E+11	1.70E-19	9.42E-08
Cs-137	3.02E+01	22.27	2.85E-06	6.84E-03	6.70E-09	4.58E-11	2.05E+01	7.74E-18	1.59E-16	2.57E+11	4.02E-21	1.03E-09
Ba-137m	8.08E-08	22.27	2.85E-06	6.84E-03	See Cs-137	See Cs-137	2.05E+01	2.88E-14	5.91E-13	2.57E+11	1.93E-17	4.95E-06
Eu-152	1.34E+01	26.38	3.38E-06	8.10E-03	2.70E-08	2.19E-10	2.43E+01	5.65E-14	1.37E-12	3.04E+11	3.75E-17	1.14E-05
Eu-154	8.50E+00	115.81	1.48E-05	3.56E-02	3.50E-08	1.25E-09	1.07E+02	6.14E-14	6.55E-12	1.33E+12	4.11E-17	5.48E-05
Np-237	2.14E+06	0.74	9.47E-08	2.27E-04	1.50E-05	3.41E-09	6.82E-01	1.03E-15	7.02E-16	8.52E+09	4.17E-19	3.55E-09
Pu-242 <sup>d</sup>	--	--	--	--	--	--	--	--	--	--	--	--
Sr-90	2.86E+01	70.30	9.00E-06	2.16E-02	7.70E-08	1.66E-09	6.48E+01	7.53E-18	4.88E-16	8.10E+11	3.77E-21	3.05E-09
Y-90	7.30E-03	70.30	9.00E-06	2.16E-02	1.70E-09	3.67E-11	6.48E+01	1.90E-16	1.23E-14	8.10E+11	1.28E-19	1.04E-07
Tc-99	2.13E+05	50.32	6.44E-06	1.55E-02	3.20E-09	4.95E-11	4.64E+01	1.62E-18	7.51E-17	5.80E+11	6.72E-22	3.90E-10
H-3	1.23E+01	1,002.70	1.28E-04	c	4.50E-11	c	9.24E+02	3.31E-19	3.06E-16	1.16E+13	0.00E+00	0.00E+00
Po-210	3.79E-01	126.17	1.61E-05	c	2.20E-06	c	1.16E+02	4.16E-19	4.84E-17	1.45E+12	2.80E-22	4.07E-10
						5.09E-06			8.71E-11			7.47E-04

- a. Based on an exposure duration of 2,000 h/yr.  
b. Uppermost 30 cm of soil layer [adapted from Lyons (2003)].  
c. Po-210 resuspension taken into account in derivation of effluent intakes  
d. Plutonium and Americium not environmental contaminants until 1960

Table 4-19. Annual average ground layer external exposure, resuspension submersion external exposure, and resuspension submersion intake at Mound by radionuclide, 1949.

Nuclide	Half-life (yr)	Mean soil (Bq/kg)	Airborne (Bq/m <sup>3</sup> )	Submersion intake (Bq) <sup>a</sup>	ICRP (1995) DCF (Sv/Bq)	Submersion intake dose (Sv)	External submersion (Bq s/m <sup>3</sup> ) <sup>a</sup>	Sv/(Bq s m <sup>-3</sup> ) effective DCF	Effective dose (Sv)	Soil layer <sup>b</sup> (Bq s/m <sup>3</sup> ) <sup>a</sup>	Infinite thickness DCF Sv/(Bq s/m <sup>3</sup> )	Soil exposure dose (Sv/yr)
Ac-227	2.18E+01	12.58	1.61E-06	3.86E-03	6.30E-04	<b>2.43E-06</b>	1.16E+01	5.82E-18	6.75E-17	1.45E+11	2.65E-21	3.84E-10
Th-227	5.12E-02	12.58	1.61E-06	3.86E-03	7.60E-06	2.94E-08	1.16E+01	4.88E-15	5.66E-14	1.45E+11	2.79E-18	4.04E-07
Am-241 <sup>d</sup>	4.32E+02	--	--	--	--	--	--	--	--	--	--	--
Pu-238 <sup>d</sup>	--	--	--	--	--	--	--	--	--	--	--	--
Pu-239, 240 <sup>d</sup>	--	--	--	--	--	--	--	--	--	--	--	--
Pu-241 <sup>d</sup>	--	--	--	--	--	--	--	--	--	--	--	--
Co-60	5.27E+00	732.60	9.38E-05	2.25E-01	1.70E-08	3.83E-09	6.75E+02	1.26E-13	8.51E-11	8.44E+12	8.68E-17	<b>7.33E-04</b>
Pa-231	3.28E+04	42.18	5.40E-06	1.30E-02	8.90E-05	<b>1.15E-06</b>	3.89E+01	1.72E-15	6.69E-14	4.86E+11	1.02E-18	4.96E-07
Th-230	7.70E+04	110.26	1.41E-05	3.39E-02	2.80E-05	<b>9.48E-07</b>	1.02E+02	1.74E-17	1.77E-15	1.27E+12	6.47E-21	8.22E-09
Th-232	1.41E+10	51.06	6.54E-06	1.57E-02	2.90E-05	<b>4.55E-07</b>	4.71E+01	8.72E-18	4.10E-16	5.88E+11	2.79E-21	1.64E-09
Ac-228	6.99E-04	37.37	4.78E-06	1.15E-02	2.90E-08	3.33E-10	3.44E+01	4.78E-14	1.65E-12	4.31E+11	3.20E-17	<b>1.38E-05</b>
Ra-228	5.76E+00	37.37	4.78E-06	1.15E-02	1.70E-06	1.95E-08	3.44E+01	0.00E+00	0.00E+00	4.31E+11	0.00E+00	0.00E+00
Ra-207	3.22E+01	5.37	6.87E-07	1.65E-03	3.20E-09	5.27E-12	4.94E+00	7.54E-14	3.73E-13	6.18E+10	5.02E-17	3.10E-06
Bi-210	1.37E-02	2.96	3.79E-07	9.09E-04	6.00E-08	5.46E-11	2.73E+00	3.29E-17	8.97E-17	3.41E+10	1.93E-20	6.58E-10
Bi-210m	3.00E+06	2.96	3.79E-07	9.09E-04	2.10E-06	1.91E-09	2.73E+00	1.22E-14	3.33E-14	3.41E+10	7.37E-18	2.51E-07
Bi-214	3.78E-05	28.86	3.69E-06	8.87E-03	2.10E-08	1.86E-10	2.66E+01	7.65E-14	2.03E-12	3.32E+11	5.25E-17	<b>1.75E-05</b>
Ra-226	1.60E+03	48.10	6.16E-06	1.48E-02	2.20E-06	<b>3.25E-08</b>	4.43E+01	3.15E-16	1.40E-14	5.54E+11	1.70E-19	9.42E-08
Cs-137	3.02E+01	22.79	2.92E-06	7.00E-03	6.70E-09	4.69E-11	2.10E+01	7.74E-18	1.63E-16	2.63E+11	4.02E-21	1.06E-09
Ba-137m	8.08E-08	22.79	2.92E-06	7.00E-03	See Cs-137	See Cs-137	2.10E+01	2.88E-14	6.05E-13	2.63E+11	1.93E-17	<b>5.07E-06</b>
Eu-152	1.34E+01	27.75	3.55E-06	8.52E-03	2.70E-08	2.30E-10	2.56E+01	5.65E-14	1.44E-12	3.20E+11	3.75E-17	<b>1.20E-05</b>
Eu-154	8.50E+00	125.80	1.61E-05	3.86E-02	3.50E-08	1.35E-09	1.16E+02	6.14E-14	7.12E-12	1.45E+12	4.11E-17	<b>5.96E-05</b>
Np-237	2.14E+06	0.74	9.47E-08	2.27E-04	1.50E-05	3.41E-09	6.82E-01	1.03E-15	7.02E-16	8.52E+09	4.17E-19	3.55E-09
Pu-242 <sup>d</sup>	--	--	--	--	--	--	--	--	--	--	--	--
Sr-90	2.86E+01	71.78	9.19E-06	2.21E-02	7.70E-08	1.70E-09	6.62E+01	7.53E-18	4.98E-16	8.27E+11	3.77E-21	3.12E-09
Y-90	7.30E-03	71.78	9.19E-06	2.21E-02	1.70E-09	3.75E-11	6.62E+01	1.90E-16	1.26E-14	8.27E+11	1.28E-19	1.06E-07
Tc-99	2.13E+05	50.32	6.44E-06	1.55E-02	3.20E-09	4.95E-11	4.64E+01	1.62E-18	7.51E-17	5.80E+11	6.72E-22	3.90E-10
H-3	1.23E+01	1,058.20	1.35E-04	c	4.50E-11	c	9.75E+02	3.31E-19	3.23E-16	1.22E+13	0.00E+00	0.00E+00
Po-210	3.79E-01	48,396.00	6.19E-03	c	2.20E-06	c	4.46E+04	4.16E-19	1.86E-14	5.58E+14	2.80E-22	1.56E-07
						5.09E-06			9.85E-11			8.45E-04

a. Based on an exposure duration of 2,000 h/yr.

b. Uppermost 30 cm of soil layer [adapted from Lyons (2003)].

c. H-3 and Po-210 resuspension taken into account in derivation of effluent intakes

d. Plutonium and Americium not environmental contaminants until 1960

Table 4-20. Mean and maximum environmental external radiation levels at Mound by year.

Year	Mound mean site-wide (Sv)	SM/PP Hill area maximum (Sv)	Year	Mound mean site-wide (Sv)	SM/PP Hill area maximum (Sv)
2003	--	--	1975	7.14E-05	4.70E-04
2002	4.27E-05	2.81E-04	1974	9.87E-05	6.50E-04
2001	4.27E-05	2.81E-04	1973	9.87E-05	6.50E-04
2000	4.27E-05	2.81E-04	1972	9.87E-05	6.50E-04
1999	4.27E-05	2.81E-04	1971	9.87E-05	6.50E-04
1998	4.27E-05	2.81E-04	1970	9.87E-05	6.50E-04
1997	4.27E-05	2.81E-04	1969	1.49E-04	9.81E-04
1996	4.27E-05	2.81E-04	1968	1.49E-04	9.81E-04
1995	4.27E-05	2.81E-04	1967	1.49E-04	9.81E-04
1994	4.27E-05	2.81E-04	1966	1.49E-04	9.81E-04
1993	4.27E-05	2.81E-04	1965	1.49E-04	9.81E-04
1992	4.27E-05	2.81E-04	1964	2.42E-04	1.59E-03
1991	4.27E-05	2.81E-04	1963	2.42E-04	1.59E-03
1990	4.27E-05	2.81E-04	1962	2.42E-04	1.59E-03
1989	4.77E-05	3.14E-04	1961	2.42E-04	1.59E-03
1988	4.77E-05	3.14E-04	1960	2.42E-04	1.59E-03
1987	4.77E-05	3.14E-04	1959	4.17E-04	2.74E-03
1986	4.77E-05	3.14E-04	1958	4.17E-04	2.74E-03
1985	4.77E-05	3.14E-04	1957	4.17E-04	2.74E-03
1984	5.62E-05	3.70E-04	1956	4.17E-04	2.74E-03
1983	5.62E-05	3.70E-04	1955	4.17E-04	2.74E-03
1982	5.62E-05	3.70E-04	1954	7.47E-04	4.92E-03
1981	5.62E-05	3.70E-04	1953	7.47E-04	4.92E-03
1980	5.62E-05	3.70E-04	1952	7.47E-04	4.92E-03
1979	7.14E-05	4.70E-04	1951	7.47E-04	4.92E-03
1978	7.14E-05	4.70E-04	1950	7.47E-04	4.92E-03
1977	7.14E-05	4.70E-04	1949	8.45E-04	5.56E-03
1976	7.14E-05	4.70E-04			

1

No general area environmental measurements of direct gamma radiation were documented for the Mound facility other than a single aerial survey in July 1976 (DOE 1993). The maximum exposure rates documented in the survey report ranged from 20.5 to 23.5  $\mu\text{R h}^{-1}$  around the SM Building and Building 38 on the SM/PP Hill. Data from this report were difficult to interpret in a manner useful to dose reconstruction because they (1) applied to a single moment in time and (2) were probably heavily influenced by isolated radiation sources. Nevertheless, this exposure rate has been used to estimate the maximum exposure rate on site by assuming that the maximum exposure rate of 23.5  $\mu\text{R h}^{-1}$  measured in 1976 was due to a spill in 1949. The spill is assumed to contain a mix of radionuclides identical to the site wide, average soil profile of radionuclides measured in 30-cm thick soil samples (Lyons 2003). Consequently, the maximum exposure rate is assumed to decay over time exactly like the site wide, average soil concentrations (See Table 4-20).

An estimate of the uncertainty associated with the ambient dose from soil contamination has been made by assuming that the ambient dose is lognormally distributed and that the median annual dose from the soil contamination presented in Tables 4-14 through 4-19 represents the 50th percentile dose. The maximum annual exposure rates around the SM Building and Building 38 on the SM/PP Hill are assumed to represent the upper 95th percentile ambient dose. The resulting geometric standard deviation (GSD) is 3.12 for each year from 1949 through 2002.



#### 4.2.6 Direct External Exposure From Facilities

No environmental measurements of direct gamma radiation were documented for the Mound facilities. Direct external ambient dose could have resulted from gamma radiation originating within the operational buildings at Mound or from the storage of waste material and or storage of irradiated bismuth slugs within facility buildings or onsite structures. The following discussion supports the conclusion that it is unlikely that gamma radiation originating from within the operational buildings of Mound contributed to the ambient environmental dose.

Waste transport vehicles were used at Mound beginning in the 1950s for transporting casks of polonium from their unloading area along the railroad siding to the T Building. The irradiated canned bismuth slugs received from the Hanford site were removed from casks and stored in a pool of water located on the second floor of T Building where the separation of  $^{210}\text{Po}$  from bismuth took place (DOE 1993b).

Drummed radioactive wastes generated at Mound were typically staged in operating areas and moved by health physics personnel to storage warehouses before shipment. In the 1940s and 1950s the "old explosives bunkers" were used to store waste with high gamma radiation levels to avoid worker exposures. The isolated location of the bunkers allowed these wastes to be stored away from the occupied areas of the site. Modern facilities replaced the old warehouses onsite in the 1960s and 1970s (DOE 1993b).

The most likely source of environmental exposure from gamma sources originating within Mound facilities would be associated with the  $^{226}\text{Ra}$  -  $^{227}\text{Ac}$  program which separated  $^{227}\text{Ac}$  from neutron irradiated  $^{226}\text{Ra}$  target material. The radium-actinium technology developed at Argonne National Lab (ANL) was transferred to Mound in early 1950. The General Purpose building (GP) Building later known as the SW Building was constructed with a shielded process facility on the east side of the building referred to as the old cave. The cave design was duplicated from the one used at ANL.

By March 1952, three radium – actinium separation runs had been completed in the cave. The first run contained 0.6 g of radium yielding 135 mCi of  $^{227}\text{Ac}$ . The second and third run contained 5 grams each and yielded 2.59 and 2.36 Ci of  $^{227}\text{Ac}$  respectively. Gamma surveys conducted during the runs indicated exposure rate levels varying from less than 1 mR/h in the operational area adjacent to the cave to 7 R/h inside the cave (Bradley and Burbage 1952b). Based on the survey results, it is unlikely that gamma radiation originating from within the SW Building cave contributed to the ambient environmental dose.

No detailed description of the administrative practices involving environmental exposure is available for the early operating years at the Mound. Nevertheless, several 1951 Monthly Health Physics Reports state that whenever routine beta and gamma surveys in operational areas detect radiation levels greater than 7.5 mR/h, the area is either shielded or roped off (Bradley and Burbage 1951e, 1951f, 1951g, 1951h, 1951i). Consequently, it is unlikely that gamma radiation originating from within the operational buildings of Mound contributed to the ambient environmental dose.

#### 4.3 **UNCERTAINTIES**

An estimate of the uncertainty associated with the median environmental intakes at the Mound Laboratory is presented in Section 4.1.2 and in Table 4-21. These estimates were made by assuming that the intakes are lognormally distributed and that the median intakes represent the 50th percentile intake rate. For the Dayton Facilities, the maximum permissible  $^{210}\text{Po}$  air concentration is assumed to represent the upper 95th percentile intake resulting in a GSD of 1.6. For Mound the calculated site-wide, annual maximum intakes presented in Table 4-20 are assumed to represent the upper 95th percentile intake. The resulting geometric standard deviations (GSDs) are presented in Table 4-21.

Table 4-21. Radionuclide releases to the atmosphere (curies) from Mound 1949 to 1973.

Radionuclide	Release reported by Mound <sup>a</sup> (Ci)	Release used in this analysis (Ci)
<sup>238,239</sup> Pu	3.60E-01 ± 50%	3.60E-01
<sup>210</sup> Po	4.9E-01 ± 50%	6.0E-01
<sup>3</sup> H	2.85E+06 ± 25%	2.98E+06
<sup>227</sup> Ac (purified)	5.3E-06 ± 100%	5.3E-06
<sup>226</sup> Ra, <sup>227</sup> Ac, <sup>228</sup> Th and their associated progeny	1.6E-01 ± 200%	1.6E-01

a. Storey 1973

An estimate of the uncertainty associated with the ambient dose at the Dayton Facilities has been made by assuming that the ambient dose is lognormally distributed and that the median annual dose calculated in Section of 4.1.4.3 represents the 50th percentile dose. Exposure to the “tolerance” or permissible level of 15 cSv per year is assumed to represent the upper 95th percentile intake. The resulting geometric standard deviation (GSD) is 3.6. For Mound the calculated mean ambient dose presented in Table 4-29 is assumed to represent the 50th percentile dose. The maximum ambient dose associated with the SM/PP hill area is assumed to represent the upper 95th percentile ambient dose resulting in an annual GSD of 3.12.

Due to the lack of available environmental air monitoring data for Dayton Units III and IV, the environmental intakes for both Dayton Units were determined using the highest monthly median air concentration measured at Dayton Unit III in December 1947. Based on a review of available data, the environmental airborne <sup>210</sup>Po at both facilities would likely be comparable.

Effluent release rate data from Mound was unavailable for some operational time periods. Consequently, extrapolations were necessary to estimate intakes for years in which no onsite air monitoring data were available. Effluent intake data for <sup>210</sup>Po from 1954 through 1966 were based on an assumption that the annual increase in the effluent release rate (source term) was 20% greater than the earliest year for which monitoring data were published (i.e., 20 µCi/d from 1949 through 1953). Beginning in 1967 through 1970, the <sup>210</sup>Po data are based on reported <sup>238</sup>Pu effluent source terms (scaled to infer <sup>210</sup>Po based on the ratio of <sup>210</sup>Po to <sup>238</sup>Pu on air filter samples). Similarly, annual tritium oxide intakes from 1954 through 1958 were backwards extrapolated from the 1959 source term (the first year for which such data were published—31,527 Ci/yr) using an annual assumed reduction factor of 10%. These assumptions are believed to be a reasonable depiction of the trend in facility operations during the extrapolated time frames, and the total activity released in effluent compares favorable to the inventory of released radionuclides reported by Mound presented below.

## REFERENCES

- Adams, P. C., 1961, *Environmental Monitoring Report Third Quarter 1961*, Monsanto Research Corporation, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 8762]
- Adams, P. C., 1962a, *Environmental Monitoring Report Fourth Quarter 1961*, Monsanto Research Corporation, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 4240]
- Adams, P. C., 1962b, *Environmental Monitoring Report First Quarter 1962*, Monsanto Research Corporation, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 4307]
- Adams, P. C., and H. E. Meyer, 1963a, *Environmental Monitoring Report – Fourth Quarter and Year 1962*, Monsanto Research Corporation, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 4306]
- Adams, P. C., and H. E. Meyer, 1963b, *Environmental Monitoring Semi-Annual Report – January – June, 1963*, Monsanto Research Corporation, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 4309]
- Adams, P. C., and H. E. Meyer, 1964a, *Environmental Monitoring Semiannual Report: January – June, 1964*, MLM-1210, Monsanto Research Corporation, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 8763]
- Adams, P. C., and H. E. Meyer, 1965a, *Environmental Monitoring Report: July – December, 1964 and 1964 Summary*, MLM-1241, Monsanto Research Corporation, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 4299]
- Adams, P. C., and H. E. Meyer, 1965b, *Environmental Monitoring Report: January – June, 1965*, MLM-1275, Monsanto Research Corporation, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 4245]
- Adams, P. C., H. F. Anderson, and H. E. Meyer, 1966, *Environmental Monitoring Report: July – December, 1965 and 1965 Summary*, MLM-1335, Monsanto Research Corporation, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 8763]
- Anderson, H. F., and W. E. Sheehan, 1970, *Environmental Monitoring Report: July-December, 1969 and 1969 Summary*, MLM-1616 Monsanto Research Corporation, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12610]
- Anderson, H. F, W. E. Sheehan, and H. E. Meyer, 1966, *Environmental Monitoring Report: January-June, 1966*, MLM-1356, Monsanto Research Corporation, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 4250]
- Anderson, H. F, W. E. Sheehan, and H. E. Meyer, 1967a, *Environmental Monitoring Report: July-December, 1966 and 1966 Summary*, MLM-1391, Monsanto Research Corporation, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 4276]
- Anderson, H. F, W. E. Sheehan, and H. E. Meyer, 1967b, *Environmental Monitoring Report: January-June, 1967*, MLM-1425, Monsanto Research Corporation, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 4256]

- Anderson, H., F. W. E. Sheehan, and H. E. Meyer, 1968a, *Environmental Monitoring Report: July-December, 1967 and 1967 Summary*, MLM-1464, Monsanto Research Corporation, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 4311]
- Anderson, H. F, W. E. Sheehan, and H. E. Meyer, 1968b, *Environmental Monitoring Report: January-June, 1968*, MLM-1522, Monsanto Research Corporation, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 4279]
- Anderson, H. F, W. E. Sheehan, and H. E. Meyer, 1969a, *Environmental Monitoring Report: July-December, 1968 and 1968 Summary*, MLM-1619, Monsanto Research Corporation, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 4315]
- Anderson, H. F., W. E. Sheehan, and H. E. Meyer, 1969b, *Environmental Monitoring Report: January-June, 1969*, MLM-1615, Monsanto Research Corporation, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 4302]
- Bauer, L. R., 1993, *Mound Site Environmental Report for Calendar Year 1992*, MLM-3778, U.S. Department of Energy, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 2027]
- Bradley, J. E., 1952a, *Health Physics Monthly Information Report, August 1952*, MLM-752/MLM-MU-52-68-0034, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12433]
- Bradley, J. E., 1952b, *Health Physics Monthly Information Report, September 1952*, MLM-764/MLM-MU-52-69-0024, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12433]
- Bradley, J. E., 1952c, *Health Physics Monthly Information Report, October 1952*, MLM-778/MLM-MU-52-70-0032, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12433]
- Bradley, J. E., 1952d, *Health Physics Monthly Information Report, November 1952*, MLM-786/MLM-MU-52-71-0013, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12433]
- Bradley, J. E., 1952e, *Health Physics Monthly Information Report, December 1952*, MLM-798/MLM-MU-52-72-0023, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12433]
- Bradley, J. E., 1953a, *Recommendations for Reduction of the Mound Laboratory Environmental Survey Program*, memorandum dated February 25, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 4234]
- Bradley, J. E., 1953b, *Health Physics Monthly Information Report, January 1953*, MLM-809/MLM-MU-53-61-0001, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12434]
- Bradley, J. E., 1953c, *Health Physics Monthly Information Report, February 1953*, MLM-821/MLM-MU-53-62-0002, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12434]
- Bradley, J. E., 1953d, *Health Physics Monthly Information Report, March 1953*, MLM-832/MLM-MU-53-63-0001, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12434]
- Bradley, J. E., 1953e, *Health Physics Monthly Information Report, April 1953*, MLM-845/MLM-MU-53-64-0003, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12434]
- Bradley, J. E., 1953f, *Health Physics Monthly Information Report, May 1953*, MLM-854/MLM-MU-53-65-0001, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12434]

- Bradley, J. E., 1953g, *Health Physics Monthly Information Report, June 1953*, MLM-870/MLM-MU-53-66-0001, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12434]
- Bradley, J. E., 1953h, *Health Physics Monthly Information Report, July 1953*, MLM-883/MLM-MU-53-67-0001, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12434]
- Bradley, J. E., 1953i, *Health Physics Monthly Information Report, August 1953*, MLM-895/MLM-MU-53-68-0001, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12434]
- Bradley, J. E., 1953j, *Health Physics Monthly Information Report, September 1953*, MLM-904/MLM-MU-53-69-0001, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12434]
- Bradley, J. E., 1953k, *Health Physics Monthly Information Report, October 1953*, MLM-916/MLM-MU-53-70-0001, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12434]
- Bradley, J. E., 1953l, *Health Physics Monthly Information Report, November 1953*, MLM-924/MLM-MU-53-71-0001, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12434]
- Bradley, J. E., 1953m, *Health Physics Monthly Information Report, December 1953*, MLM-933/MLM-MU-53-72-0001, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12434]
- Bradley, J. E., 1954a, *Health Physics Monthly Information Report, January 1954*, MLM-940/MLM-MU-54-61-0019, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12436]
- Bradley, J. E., 1954b, *Health Physics Monthly Information Report, February 1954*, MLM-951/MLM-MU-54-62-0001, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12436]
- Bradley, J. E., 1954c, *Health Physics Monthly Information Report, March 1954*, MLM-959/MLM-MU-54-63-0001, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12436]
- Bradley, J. E., 1954d, *Quarterly Health Physics Report through June 30, 1954*, MLM-990/MLM-MU-54-67-0001, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12436]
- Bradley, J. E., 1954e, *Quarterly Health Physics Report through September 30, 1954*, MLM-1011/MLM-MU-54-70-0001, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12436]
- Bradley, J. E., and J. J. Burbage, 1951a, *Health-Physics Monthly Information Report, January 1951*, MLM-544/MLM-MU-51-61-0026, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12431]
- Bradley, J. E., and J. J. Burbage, 1951b, *Health-Physics Monthly Information Report, February 1951*, MLM-548/MLM-MU-51-62-0028, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12431]
- Bradley, J. E., and J. J. Burbage, 1951c, *Health-Physics Monthly Information Report, March 1951*, MLM-556/MLM-MU-51-63-0026, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12431]
- Bradley, J. E., and J. J. Burbage, 1951d, *Health-Physics Monthly Information Report, April 1951*, MLM-568/MLM-MU-51-64-0022, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12431]

- Bradley, J. E., and J. J. Burbage, 1951e, *Health-Physics Monthly Information Report, May 1951*, MLM-578/MLM-MU-51-65-0032, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12431]
- Bradley, J. E., and J. J. Burbage, 1951f, *Health-Physics Monthly Information Report, June 1951*, MLM-593/MLM-MU-51-67-0023, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12431]
- Bradley, J. E., and J. J. Burbage, 1951g, *Health-Physics Monthly Information Report, July 1951*, MLM-600/MLM-MU-51-66-0028, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12431]
- Bradley, J. E., and J. J. Burbage, 1951h, *Health-Physics Monthly Information Report, August 1951*, MLM-607/MLM-MU-51-68-0029, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12431]
- Bradley, J. E., and J. J. Burbage, 1951i, *Health-Physics Monthly Information Report, September 1951*, MLM-620/MLM-MU-51-*illegible*, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12431]
- Bradley, J. E., and J. J. Burbage, 1951j, *Health-Physics Monthly Information Report, October 1951*, MLM-634/MLM-MU-51-70-0031, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12431]
- Bradley, J. E., and J. J. Burbage, 1951k, *Health-Physics Monthly Information Report, November 1951*, MLM-640/MLM-MU-51-71-0032, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12431]
- Bradley, J. E., and J. J. Burbage, 1951l, *Health-Physics Monthly Information Report, December 1951*, MLM-651/MLM-MU-51-72-0021, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12431]
- Bradley, J. E., and J. J. Burbage, 1952a, *Health-Physics Monthly Information Report, January 1952*, MLM-661/MLM-MU-*illegible*, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12433]
- Bradley, J. E., and J. J. Burbage, 1952b, *Health Physics Monthly Information Report, February 1952*, MLM-673/MLM-MU-52-62-0017, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12433]
- Bradley, J. E., and J. J. Burbage, 1952c, *Health-Physics Monthly Information Report, March 1952*, MLM-685/MLM-MU-52-63-0018, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12433]
- Bradley, J. E., and J. J. Burbage, 1952d, *Health-Physics Monthly Information Report, April 1952*, MLM-700/MLM-MU-52-64-0039, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12433]
- Bradley, J. E., and J. J. Burbage, 1952e, *Health-Physics Monthly Information Report, May 1952*, MLM-707/MLM-MU-52-65-0026, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12433]
- Bradley, J. E., and J. J. Burbage, 1952f, *Health Physics Monthly Information Report, June 1952*, MLM-727/MLM-MU-52-66-0019, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12433]

- Bradley, J. E., and J. J. Burbage, 1952g, *Monthly Health Physics Information Report, July 1952*, MLM-736/MLM-MU-52-67-0024, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12433]
- Bradley, J. E., and M. M. Haring, 1948a, *Monthly Health Information Report, September 1948*, MLM-199/MLM-MU-48-69-0041, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12612]
- Bradley, J. E., and M. M. Haring, 1948b, *Monthly Health Information Report, October 1948*, MLM-219/MLM-MU-48-70-0027, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 11177]
- Bradley, J. E., and M. M. Haring, 1948c, *Monthly Health Information Report, November 1948*, MLM-241/MLM-MU-48-71-0021, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 11874]
- Bradley, J. E., and M. M. Haring, 1948d, *Monthly Health Information Report, December 1948*, MLM-256/MLM-MU-48-72-0030, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 11778]
- Bradley, J. E., and M. M. Haring, 1948e, *Shielding Studies at Mound Laboratories, August 1948*, MLM-172, Monsanto Chemical Company, Dayton, Ohio. [SRDB Ref ID: 11773]
- Bradley, J. E., and M. M. Haring, 1949a, *Monthly Health Information Report, January 1949*, MLM-281/MLM-MU-49-61-0014, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 13282]
- Bradley, J. E., and M. M. Haring, 1949b, *Monthly Health Information Report, February 1949*, MLM-292/MLM-MU-49-62-0014, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 13282]
- Bradley, J. E., and M. M. Haring, 1949c, *Monthly Health Information Report, March 1949*, MLM-307/MLM-MU-49-63-0014, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 13282]
- Bradley, J. E., and M. M. Haring, 1949d, *Monthly Health Information Report, April 1949*, MLM-327/MLM-MU-49-64-0015, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 13282]
- Bradley, J. E., and M. M. Haring, 1949e, *Monthly Health Information Report, May 1949*, MLM-359/MLM-MU-49-65-0022, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 13282]
- Bradley, J. E., and M. M. Haring, 1949f, *Monthly Health Information Report, June 1949*, MLM-336/MLM-MU-49-66-0011, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 13282]
- Bradley, J. E., and M. M. Haring, 1949g, *Monthly Health Information Report, July 1949*, MLM-346/MLM-MU-49-67-0012, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 13282]
- Bradley, J. E., and M. M. Haring, 1949h, *Monthly Health Information Report, August 1949*, MLM-354/MLM-MU-49-68-0022, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 13282]
- Bradley, J. E., and M. M. Haring, 1949i, *Monthly Health Information Report, September 1949*, MLM-388/MLM-MU-49-69-0010, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 13282]
- Bradley, J. E., and M. M. Haring, 1949j, *Monthly Health Information Report, October 1949*, MLM-398/MLM-MU-49-70-0014, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 13282]
- Bradley, J. E., and M. M. Haring, 1949k, *Monthly Health Information Report, November 1949*, MLM-408/MLM-MU-49-71-0015, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 13282]
- Bradley, J. E., and M. M. Haring, 1949l, *Monthly Health Information Report, December 1949*, MLM-413/MLM-MU-49-72-0019, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 13282]

- Bradley, J. E., and M. M. Haring, 1950a, *Monthly Health Information Report, January 1950*, MLM-417/MLM-MU-50-61-0008, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12428]
- Bradley, J. E., and M. M. Haring, 1950b, *Monthly Health Information Report, February 1950*, MLM-440/MLM-MU-50-62-0014, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12428]
- Bradley, J. E., and M. M. Haring, 1950c, *Monthly Health Information Report, March 1950*, MLM-448/MLM-MU-50-63-0012, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12428]
- Bradley, J. E., and M. M. Haring, 1950d, *Monthly Health Information Report, April 1950*, MLM-459/MLM-MU-50-64-0010, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12428]
- Bradley, J. E., and M. M. Haring, 1950e, *Monthly Health Information Report, May 1950*, MLM-465/MLM-MU-50-65-0007, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12428]
- Bradley, J. E., and M. M. Haring, 1950f, *Monthly Health Information Report, June 1950*, MLM-477/MLM-MU-50-66-0009, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12428]
- Bradley, J. E., and M. M. Haring, 1950g, *Health-Physics Monthly Information Report, July 1950*, MLM-485/MLM-MU-50-67-0007, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12428]
- Bradley, J. E., and M. M. Haring, 1950h, *Health-Physics Monthly Information Report, August 1950*, MLM-496/MLM-MU-50-68-0010, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12428]
- Bradley, J. E., and M. M. Haring, 1950i, *Health-Physics Monthly Information Report, September 1950*, MLM-503/MLM-MU-50-69-0009, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12428]
- Bradley, J. E., and M. M. Haring, 1950j, *Health-Physics Monthly Information Report, October 1950*, MLM-511/MLM-MU-50-70-0011, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12428]
- Bradley, J. E., and M. M. Haring, 1950k, *Health-Physics Monthly Information Report, November 1950*, MLM-517/MLM-MU-50-71-0011, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12428]
- Bradley, J. E., and M. M. Haring, 1950l, *Health-Physics Monthly Information Report, December 1950*, MLM-528/MLM-MU-50-72-0015, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12428]
- BWXT (Babcock & Wilcox Technologies of Ohio, Inc.), 1998, *Annual Site Environmental Monitoring Report for Calendar Year 1997*, 1001-020128002, Environmental Safeguards & Compliance Department, Mound, Miamisburg, Ohio. [SRDB Ref ID: 2262]
- BWXT (Babcock & Wilcox Technologies of Ohio, Inc.), 1999, *Annual Site Environmental Monitoring Report for Calendar Year 1998*, 1001-0011010001, Environmental Safeguards and Compliance Department, Miamisburg Environmental Management Project, Mound, Miamisburg, Ohio. [SRDB Ref ID: 2271]
- BWXT (Babcock & Wilcox Technologies of Ohio, Inc.), 2000, *Annual Site Environmental Monitoring Report for Calendar Year 1999*, 1001-0302130003, Environmental Safeguards and



Compliance Department, Miamisburg Environmental Management Project, Mound, Miamisburg, Ohio. [SRDB Ref ID: 2151]

BWXT (Babcock & Wilcox Technologies of Ohio, Inc.), 2001, *Annual Site Environmental Monitoring Report for Calendar Year 2000*, 1001-0201290002, Environmental Compliance & Analytical Services Department, Miamisburg Environmental Management Project, Mound, Miamisburg, Ohio. [SRDB Ref ID: 2277]

BWXT (Babcock & Wilcox Technologies of Ohio, Inc.), 2002, *Annual Site Environmental Monitoring Report for Calendar Year 2001*, 1001-0302190002, Environmental Compliance & Analytical Services Department, Miamisburg Environmental Management Project, Mound, Miamisburg, Ohio. [SRDB Ref ID: 2134]

BWXT (Babcock & Wilcox Technologies of Ohio, Inc.), 2003, *Annual Site Environmental Monitoring Report for Calendar Year 2002*, Environmental Compliance & Analytical Services Department, Miamisburg Environmental Management Project, Mound, Miamisburg, Ohio. [SRDB Ref ID: 14558]

Carfagno, D. G., and B. M. Farmer, 1983, *Environmental Monitoring at Mound: 1982 Report*, MLM-3055, Monsanto Research Corporation, Mound, Miamisburg, Ohio. [SRDB Ref ID: 2072]

Carfagno, D. G., and B. M. Farmer, 1984, *Environmental Monitoring at Mound: 1983 Report*, MLM-3143, Monsanto Research Corporation, Mound, Miamisburg, Ohio. [SRDB Ref ID: 2075]

Carfagno, D. G., and B. M. Farmer, 1985, *Environmental Monitoring at Mound: 1984 Report*, MLM-3246, Monsanto Research Corporation, Mound, Miamisburg, Ohio. [SRDB Ref ID: 2077]

Carfagno, D. G., and B. M. Farmer, 1986, *Environmental Monitoring at Mound: 1985 Report*, MLM-3349, Monsanto Research Corporation, Mound, Miamisburg, Ohio. [SRDB Ref ID: 2081]

Carfagno, D. G., and B. M. Farmer, 1987, *Environmental Monitoring at Mound: 1986 Report*, MLM-3427, Monsanto Research Corporation, Mound Facility, Miamisburg, Ohio. [SRDB Ref ID: 2088]

Carfagno, D. G., and B. M. Farmer, 1988, *Environmental Monitoring at Mound: 1987 Report*, MLM-3492, Monsanto Research Corporation, Mound Facility, Miamisburg, Ohio. [SRDB Ref ID: 2096]

Carfagno, D. G., and B. M. Farmer, 1989, *Environmental Monitoring at Mound: 1988 Report*, MLM-3589, EG&G Mound Applied Technologies, Mound, Miamisburg, Ohio. [SRDB Ref ID: 2101]

Carfagno, D. G., and B. M. Farmer, 1990, *Environmental Monitoring at Mound: 1989 Report*, MLM-3634, EG&G Mound Applied Technologies, Mound, Miamisburg, Ohio. [SRDB Ref ID: 2108]

Carfagno, D. G., and B. Robinson, 1975, *Annual Environmental Monitoring Report: Calendar Year 1974*, MLM-2232, Monsanto Research Corporation, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 8765]

- Carfagno, D. G., and W. H. Westendorf, 1972a, *Environmental Monitoring Report: July-December 1971 and 1971 Summary*, MLM-1922, Monsanto Research Corporation, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12614]
- Carfagno, D. G., and W. H. Westendorf, 1972b, *Environmental Monitoring Report: January-June 1972*, MLM-1973, Monsanto Research Corporation, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12620]
- Carfagno, D. G., and W. H. Westendorf, 1973a, *Annual Environmental Monitoring Report: Calendar Year 1972*, MLM-2028, Monsanto Research Corporation, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12621]
- Carfagno, D. G., and W. H. Westendorf, 1973b, *Environmental Monitoring Report: January-June 1973*, MLM-2085, Monsanto Research Corporation, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 4266]
- Carfagno, D. G., and W. H. Westendorf, 1974, *Annual Environmental Monitoring Report: Calendar Year 1973*, MLM-2142, Monsanto Research Corporation, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 4268]
- DOE (Department of Energy), 1993, *Mound Plant Operable Unit 9 Site Scoping Report: Volume 3 – Radiological Site Survey*, Albuquerque Operations Office, Albuquerque, New Mexico. [SRDB Ref ID: 2388]
- DOE (Department of Energy), 1993b, *Mound Plant Operable Unit 9 Site Scoping Report: Volume 7 – Waste Management*, Albuquerque Operations Office, Albuquerque, New Mexico. [SRDB Ref ID: 11877]
- DOE (Department of Energy), 1999, *Work Plan for Environmental Restoration at the DOE Mound Site, The Mound 2000 Approach*, Final (Revision 0), Albuquerque Operations Office, Albuquerque, New Mexico. [SRDB Ref ID: 12624]
- Draper, D. G., 1984, *Stack Sampling for Pu-238 in the SM/PP Area*, memorandum to M. A. Whitney dated December 5, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12626]
- Eckerman, K. F., and J. C. Ryman, 1993, *External Exposures to Radionuclides in Air, Water and Soil*, Federal Guidance Report 12, U.S. Environmental Protection Agency, Washington, D.C. [SRDB Ref ID: 11997]
- EG&G (EG&G Mound Applied Technologies), 1991, *Environmental Monitoring at Mound: 1990 Report*, MLM-*illegible*, Mound, Miamisburg, Ohio. [SRDB Ref ID: 2120]
- EG&G (EG&G Mound Applied Technologies), 1992a, *Mound Site Environmental Report for Calendar Year 1991*, MLM-3740, Mound, Miamisburg, Ohio. [SRDB Ref ID: 2126]
- EG&G (EG&G Mound Applied Technologies), 1992b, *History of Mound Bioassay Programs*, MLM-MU-93-93-0003, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 1962]
- EG&G (EG&G Mound Applied Technologies), 1993, *Mound Site Environmental Report for Calendar Year 1992*, MLM-3778, Mound, Miamisburg, Ohio. [SRDB Ref ID: 2027]

- EG&G (EG&G Mound Applied Technologies), 1994, *Mound Site Environmental Report for Calendar Year 1993*, 0104070201-9502150008, Environmental Technology & Monitoring Section, Mound, Miamisburg, Ohio. [SRDB Ref ID: 2157]
- EG&G (EG&G Mound Applied Technologies), 1995a, *Mound site Radionuclides by Location*, Technical Manual MD-22153, Issue 1, U.S. Department of Energy, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 3240]
- EG&G (EG&G Mound Applied Technologies), 1995b, *Mound Site Environmental Report for Calendar Year 1994*, MLM-3814, Environmental Technology & Monitoring Section, Mound, Miamisburg, Ohio. [SRDB Ref ID: 2255]
- EG&G (EG&G Mound Applied Technologies), 1996, *Mound Site Environmental Report for Calendar Year 1995*, 0104070201-9612090074, Environmental Technology & Monitoring Group, Mound, Miamisburg, Ohio. [SRDB Ref ID: 2153]
- EG&G (EG&G Mound Applied Technologies), 1997, *Mound Site Environmental Report for Calendar Year 1996*, 0104070201-9706230044, Environmental Technology & Monitoring Group, Mound, Miamisburg, Ohio. [SRDB Ref ID: 2152]
- EPA (U.S. Environmental Protection Agency), 2003, *NPL Fact Sheets for Ohio: Mound Plant (USDOE)*, <http://www.epa.gov/R5Super/npl/ohio/OH6890008984.htm> (accessed 2/17/2004). [SRDB Ref ID: 12425]
- Farmer, B. M., and B. Robinson, D. G. Carfagno, 1976, *Annual Environmental Monitoring Report: Calendar Year 1975*, MLM-2317, Monsanto Research Corporation, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 4263]
- Farmer, B. M., and B. Robinson, D. G. Carfagno, 1977, *Annual Environmental Monitoring Report: Calendar Year 1976*, MLM-2416, Monsanto Research Corporation, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 4260]
- Farmer, B. M., and B. Robinson, D. G. Carfagno, 1978, *Annual Environmental Monitoring Report: Calendar Year 1977*, MLM-2515, Monsanto Research Corporation, Mound Facility, Miamisburg, Ohio. [SRDB Ref ID: 4259]
- Farmer, B. M., and D. G. Carfagno, 1979, *Annual Environmental Monitoring Report: Calendar Year 1978*, MLM-2608, Monsanto Research Corporation, Mound Facility, Miamisburg, Ohio. [SRDB Ref ID: 2030]
- Farmer, B. M., and D. G. Carfagno, 1980, *Annual Environmental Monitoring Report: Calendar Year 1979*, MLM-2700, Monsanto Research Corporation, Mound Facility, Miamisburg, Ohio. [SRDB Ref ID: 2042]
- Farmer, B. M., and D. G. Carfagno, 1981, *Annual Environmental Monitoring Report Calendar: Year 1980*, MLM-2822, Monsanto Research Corporation, Mound Facility, Miamisburg, Ohio. [SRDB Ref ID: 2055]
- Farmer, B. M., and D. G. Carfagno, 1982, *Annual Environmental Monitoring Report: Calendar Year 1981*, MLM-2930, Monsanto Research Corporation, Mound Facility, Miamisburg, Ohio. [SRDB Ref ID: 2070]

- Ferry, J. L., Capt., U.S. Army, 1944, Report to Dr. Louis B. Silverman of the exposure to dental film packets and film discs from rings worn during the week of February 22nd through 29th, 1944. [SRDB Ref ID: 5862]
- ICRP (International Commission on Radiological Protection), 1995, *Dose Coefficients for Intakes of Radionuclides by Workers*, Publication 68, Pergamon Press, Oxford, England.
- Lyons, J., 2003, *Mound Onsite Soil*, U.S. Department of Energy, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 7744]
- Meyer, H. E., 1955a, *Quarterly Health Physics Report Through December 31 1954*, MLM-1028/MLM-MU-55-61-003, Monsanto Chemical Company, Miamisburg, Ohio. [SRDB Ref ID: 12436]
- Meyer, H. E., 1955b, *Quarterly Health Physics Report Through March 31 1955*, MLM-1044/MLM-MU-55-64-0003, Monsanto Chemical Company, Miamisburg, Ohio. [SRDB Ref ID: 12438]
- Meyer, H. E., 1955c, *Quarterly Health Physics Report Through June 30, 1955*, Central File No. 55-7-42/MLM-MU-*illegible*, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12438]
- Meyer, H. E., 1955d, *Quarterly Health Physics Report Through September 30, 1955*, Central File No. 55-10-48/MLM-MU-55-70-0001, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12438]
- Meyer, H. E., 1956a, *Quarterly Health Physics Report Through December 31, 1955*, Central File No. 56-2-7/MLM-MU-56-61-0002, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12438]
- Meyer, H. E., 1956b, *Quarterly Health Physics Report Through March 31, 1956*, Central File No. 56-4-59/MLM-MU-56-64-0001, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12440]
- Meyer, H. E., 1956c, *Quarterly Health Physics Report Through June 30, 1956*, Central File No. *illegible*/MLM-MU-56-*illegible*, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12440]
- Meyer, H. E., 1957a, *Quarterly Health Physics Report Through December 31, 1956*, Central File No. *illegible*/MLM-MU-57-61-0001, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12440]
- Meyer, H. E., 1957b, *Quarterly Health Physics Report Through March 31, 1957*, Central File No. 57-5-16/MLM-MU-57-64-0001, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12447]
- Meyer, H. E., 1957c, *Quarterly Health Physics Report Through June 30, 1957*, Central File No. 57-7-72/MLM-MU-57-6 *illegible*, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12447]
- Meyer, H. E., 1957d, *Quarterly Health Physics Report Through September 30, 1957*, Central File No. 57-11-21/MLM-MU-57-70-0001, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12447]
- Meyer, H. E., 1958a, *Quarterly Health Physics Report Through December 31, 1957*, Central File No. 58-1-62/MLM-MU-58-61-0002, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12447]
- Meyer, H. E., 1958b, *Quarterly Health Physics Report Through March 31, 1958*, Central File No. 58-5-36/MLM-MU-58-65-0001, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12450]
- Meyer, H. E., 1958c, *Quarterly Health Physics Report Through June 30, 1958*, Central File No. 58-8-37/MLM-MU-58-68-0001, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12450]
- Meyer, H. E., 1958d, *Quarterly Health Physics Report Through September 30, 1958*, Central File No. 58-10-78/MLM-MU-58-78-0001, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12450]

- Meyer, H. E., 1959a, *Quarterly Health Physics Report Through December 31, 1958*, Central File No. 59-2-33/MLM-MU-59-62-0001, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12450]
- Meyer, H. E., 1959b, *Quarterly Health Physics Report Through March 31, 1959*, Central File No. 59-4-illegible/MLM-MU-59-64-0001, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 2478]
- Meyer, H. E., 1959c, *Quarterly Health Physics Report Through September 30, 1959*, Central File No. 59-11-69/MLM-MU-59-71-0003, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 11873]
- Meyer, H. E., 1983, *Plutonium Air Sampling on Stacks - Standardization*, memorandum to C. W. Wagner and M. A. Wagner dated April 26, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12625]
- Miller, R. A., and M. M. Haring, 1948, *Monthly Health Information Report, March 1948*, MLM-83/MLM-MU-48-63-0023, Monsanto Chemical Company, Dayton, Ohio. [SRDB Ref ID: 13277]
- Monsanto (Monsanto Chemical Company), 1945a, *Unit # 3 and # 4 Progress Report, July 1-15, 1945*, Dayton, Ohio. [SRDB Ref ID: 8632]
- Monsanto (Monsanto Chemical Company), 1945b, *Unit # 3 and # 4 Progress Report, July 16-31, 1945*, Dayton, Ohio. [SRDB Ref ID: 8624]
- Monsanto (Monsanto Chemical Company), 1945c, *Unit # 3 Progress Report, August 1-15, 1945*, Dayton, Ohio. [SRDB Ref ID: 8624]
- Monsanto (Monsanto Chemical Company), 1945d, *Unit # 3 Progress Report, August 15-31, 1945*, Dayton, Ohio. [SRDB Ref ID: 8624]
- Monsanto (Monsanto Chemical Company), 1945e, *Unit # 3 Progress Report, September 1-15, 1945*, Dayton, Ohio. [SRDB Ref ID: 8624]
- Monsanto (Monsanto Chemical Company), 1945f, *Unit # 3 Progress Report, September 15-30, 1945*, Dayton, Ohio. [SRDB Ref ID: 8624]
- Monsanto (Monsanto Chemical Company), 1945g, *Unit # 3 Progress Report, October 1-15, 1945*, Dayton, Ohio. [SRDB Ref ID: 8624]
- Monsanto (Monsanto Chemical Company), 1945h, *Unit # 3 Progress Report, October 15-31, 1945*, Dayton, Ohio. [SRDB Ref ID: 8624]
- Monsanto (Monsanto Chemical Company), 1945i, *Unit # 3 Progress Report, December 1-15, 1945*, Dayton, Ohio. [SRDB Ref ID: 8632]
- Monsanto (Monsanto Chemical Company), 1947a, *Monthly Health Report, Units III and IV, November 1-30, 1947*, Dayton, Ohio. [SRDB Ref ID: 8723]
- Monsanto (Monsanto Chemical Company), 1947b, *Monthly Health Report, Units III and IV, December 1-31, 1947*, Dayton, Ohio. [SRDB Ref ID: 13284]
- Monsanto (Monsanto Chemical Company), 1950, *Report No. 3 of Steering Committee for the Disposal of Units III and IV*, MLM – 461, Mound Laboratory, Miamisburg, Ohio, April 17, 1950. [SRDB Ref ID: 8722]

- Monsanto (Monsanto Chemical Company), 1960, *Summary of Environmental Monitoring Report for 1959 and First Quarter 1960*, MLM-MU-60-67-0001, Health Physics Department, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 2482]
- Monsanto (Monsanto Chemical Company), 1961a, *Summary of Environmental Monitoring for Fourth Quarter 1960 and Year 1960*, MLM-MU-61-63-0001, Health Physics Department, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 2487]
- Monsanto (Monsanto Research Corporation), 1961b, *Summary of Environmental Monitoring for First Quarter 1961*, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 4304]
- Monsanto (Monsanto Research Corporation), 1971a, *Environmental Monitoring Report: January-June 1970*, MLM-1784, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12627]
- Monsanto (Monsanto Research Corporation), 1971b, *Environmental Monitoring Report: July-December 1970 and 1970 Summary*, MLM-1795, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12628]
- Monsanto (Monsanto Research Corporation), 1972, *Environmental Monitoring Report: January-June 1971*, MLM-1880, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12629]
- Monsanto (Monsanto Research Corporation), 1975a, *Omnibus Environmental Assessment Mound Laboratory*, MLM-MU-75-67-0001, Energy Research and Development Administration, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 2204]
- Monsanto (Monsanto Research Corporation), 1975b, *Mound Laboratory Plutonium Study*, MLM-MU-75-61-0001, Energy Research and Development Administration, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12985]
- Monsanto (Monsanto Research Corporation), 1976a, *Development of an Atmospheric Diffusion Model for Optimum Location of Sampling Sites in the Mound Laboratory Environment, Final Report Phase III*, MRC-DA-520, Dayton Laboratory, Dayton, Ohio. [SRDB Ref ID: 4294]
- Monsanto (Monsanto Research Corporation), 1976b, *Annual Environmental Monitoring Summary, July 1975 – June 1976*, MLM-MU-76-70-001, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 2221]
- NIOSH (National Institute for Occupational Safety and Health), 2007, *Radiation Exposures Covered for Dose Reconstructions Under Part B of the Energy Employees Occupational Illness Compensation Program Act*, OCAS-IG-003, Rev. 0, Office of Compensation Analysis and Support, Cincinnati, Ohio, November. [SRDB Ref ID: 35987]
- ORAUT (Oak Ridge Associated Universities Team), 2005, *Savannah River Site*, ORAUT-TKBS-0003, Rev. 03, Oak Ridge, Tennessee, April 5.
- Rhude, P. J., and W. K. Wallace, 1983, *Plutonium Air Sampling on Stacks - Standardization*, memorandum to H. E. Meyer dated June 29, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12630]
- Robinson, R., 1972, *Stack Effluent Concentrations for Particulate Radionuclides*, letter to Farmer, B. R. dated September 25, Energy Research and Development Administration, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12631]

Storey, Donald R. 1973. "Nuclide Inventory." Letter from Donald R. Storey, Director of Administration, Monsanto Research Corporation, Mound Laboratory, Miamisburg, Ohio, to L. Wainwright, Area Manager, U.S. Atomic Energy Commission. November 8, 1973. [SRDB Ref ID: 12709]

Svirbely, J. L., No Date, *Monthly Health Report, Monsanto Chemical Company, Units III, IV and V, January 1-31, 1948*, Dayton, Ohio. [SRDB Ref ID: 13281]

Tybout, R. A., 2<sup>nd</sup> Lt. U.S. Corps of Engineers, 1944, Report to Dr. Louis B. Silverman of the exposure to dental film packets and film discs from rings worn during the week of May 17 through 23, 1944. [SRDB Ref ID: 5862]

Wolf, B.S., 1945, "Medical Program at Units #3 and #4, Monsanto Chemical Co., Dayton, Ohio as of July 1, 1945," memorandum to Maj. John L. Ferry (U.S. Army), August 3. [SRDB Ref ID: 8629]

### UNCITED REFERENCES

ATSDR (Agency for Toxic Substances and Disease Registry), 2004, *Public Health Assessment US DOE Mound Facility*, <http://www.atsdr.cdc.gov/HAC/PHA/doemound/> (accessed 2/6/2004), United States Department of Health and Human Services, Washington, D.C. [SRDB Ref ID: 13627]

DOE (Department of Energy), 1991, *Remedial Investigation Operable Unit 4, Miami-Erie Canal Sampling and Analysis Plan*, Albuquerque Operations Office, Albuquerque, New Mexico. [SRDB Ref ID: 11560]

DOE (Department of Energy), 1979, *Final Environmental Impact Statement Mound Facility Miamisburg, Ohio*, DOE/EIS-0014. [SRDB Ref ID: 2394]

EG&G (EG&G Mound Applied Technologies), 1994, *Mound Plant Environmental Monitoring Plan*, U.S. Department of Energy, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 12984]

Farmer, B. M., and D. G. Carfagno, date unknown, *HPR 1948-1959*, U.S. Department of Energy, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 4234]

Meyer, H. E., 1994, *History of Personnel External Dosimetry Program at the Dayton Project and Mound Laboratory 1946 – 1993 Volume I*, EG&G Mound Applied Technologies, Miamisburg, Ohio. [SRDB Ref ID: 3268]

Monsanto (Monsanto Research Corporation), 1971a, *Development of an Atmospheric Diffusion Model for Optimum Location of Sampling Sites in the Mound Laboratory Environment, Interim Report Phase II*, Dayton Laboratory, Dayton, Ohio. [SRDB Ref ID: 4291]

Monsanto (Monsanto Research Corporation), 1976, *Hazard Evaluation of the Special Metallurgical (SM) Building at Mound Laboratory, Addendum II*, MLM-MU-76-66-0001, Energy Research and Development Administration, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 2349]

Monsanto (Monsanto Research Corporation), 1978, *Mound Facility Environmental Monitoring Summary 1977*, MLM-MU-78-66-001, Mound Facility, Miamisburg, Ohio. [SRDB Ref ID: 2231]

Monsanto (Monsanto Research Corporation), 1986, *The Mound Site Development and Facilities Utilization Master Plan*, MLM-ML-86-52-0001, Department of Energy, Mound Laboratory, Miamisburg, Ohio. [SRDB Ref ID: 8238]

NIOSH (National Institute for Occupational Safety and Health), 2007, External Dose Reconstruction Implementation Guideline, OCAS-IG-001, Rev. 3, Office of Compensation Analysis and Support, Cincinnati, Ohio, November 21.



## GLOSSARY

### curie

A special unit of activity. One curie exactly equals  $3.7 \times 10^{10}$  nuclear transitions per second.

### dose equivalent (H)

The product of the absorbed dose (D), the quality factor (Q), and any other modifying factors. The special unit is the rem. When D is expressed in Gy, H is in Sieverts (Sv).  
(1 Sv = 100 rem.)

### dosimetry

The science of assessing absorbed dose, dose equivalent, effective dose equivalent, etc., from external and/or internal sources of radiation.

### exposure

As used in the technical sense, a measure expressed in roentgens (R) of the ionization produced by photon radiation (i.e., gamma and X-rays) in air.

### gamma rays (G or $\gamma$ )

Electromagnetic radiation (photons) originating in atomic nuclei and accompanying many nuclear reactions (e.g., fission, radioactive decay, and neutron capture). Physically, gamma rays are identical to X-rays of high energy, the only essential difference being that X-rays do not originate in the nucleus.

### ionizing radiation

Electromagnetic or particulate radiation capable of producing charged particles through interactions with matter.

### photon

A unit or "particle" of electromagnetic radiation consisting of X- and/or gamma rays.

### photon – X-ray

Electromagnetic radiation of energies between 10 keV and 100 keV whose source can be an X-ray machine or radionuclide.

### radioisotope thermoelectric generator (RTG)

A power supply using thermoelectric unicouples to convert heat generated from radioactive decay to electricity.

### radiation

Alpha, beta, neutron, and photon radiation.

### radioactivity

The spontaneous emission of radiation, generally alpha or beta particles, gamma rays, and neutrons from unstable nuclei.

**rem**

A unit of dose equivalent, equal to the product of the number of rad absorbed and the “quality factor.”

**roentgen (R or r)**

A unit of exposure to gamma (or X-ray) radiation. It is defined precisely as the quantity of gamma (or X) rays that will produce a total charge of  $2.58 \times 10^{-4}$  coulomb in 1 kg of dry air STP. An exposure of 1 R is approximately equivalent to an absorbed dose of 1 rad in soft tissue for higher ( $\sim >100$  keV) energy photons.

**shielding**

A material or obstruction that absorbs (or attenuates) radiation and thus tends to protect personnel or materials from radiation.

**X-ray**

Ionizing electromagnetic radiation of external nuclear origin or a radiograph

## ATTACHMENT A DOSE COEFFICIENTS

Table A-1. Dose coefficients for contaminated soil to an infinite depth [Sv/(Bq s m<sup>-3</sup>)]<sup>a</sup>

Isotope	Gonad	Breast	Lung	R marrow	Bone surface	Thyroid	Remainder	Effective dose equivalent	Skin
Ac-227	2.76E-21	2.88E-21	2.43E-21	2.22E-21	7.20E-21	2.27E-21	2.29E-21	2.65E-21	3.22E-21
Am-241	2.53E-19	2.74E-19	2.01E-19	1.57E-19	8.43E-19	1.94E-19	1.86E-19	1.34E-19	3.10E-19
Ce-141	1.77E-18	1.84E-18	1.58E-18	1.47E-18	4.34E-18	1.47E-18	1.49E-18	7.93E-18	1.94E-18
Cs-137	4.27E-21	4.50E-21	3.61E-21	3.25E-21	1.09E-20	3.43E-21	3.41E-21	4.02E-21	9.34E-20
Co-60	9.08E-17	9.22E-17	8.36E-17	8.39E-17	1.18E-16	7.82E-17	8.51E-17	8.68E-17	9.94E-17
Pu-238	1.26E-21	1.6E-21	2.99E-22	3.32E-22	1.57E-21	4.04E-22	4.00E-22	8.10E-22	5.09E-21
Pu-239/240	1.82E-21	1.99E-21	1.31E-21	1.25E-21	3.40E-21	1.27E-21	1.28E-21	1.58E-21	4.87E-21
Pu-241	3.28E-23	3.42E-23	2.89E-23	2.60E-23	9.16E-23	2.70E-23	2.70E-23	3.16E-23	3.78E-23
Pa-231	1.08E-18	1.11E-18	9.52E-19	9.26E-19	1.96E-18	8.90E-19	9.13E-19	1.02E-18	1.20E-18
Sr-90	4.02E-21	4.25E-21	3.37E-21	3.00E-21	1.06E-20	3.21E-21	3.17E-21	3.77E-21	1.50E-20
Th-230	6.88E-21	7.38E-21	5.72E-21	5.03E-21	1.91E-20	5.41E-21	5.39E-21	6.47E-21	9.79E-21
Th-232	3.07E-21	3.38E-21	2.36E-21	2.04E-21	8.51E-21	2.26E-21	2.24E-21	2.79E-21	5.55E-21
Th-234	1.34E-19	1.41E-19	1.17E-19	1.01E-19	4.17E-19	1.10E-19	1.09E-19	1.29E-19	1.50E-19
U-234	2.53E-21	2.89E-21	1.64E-21	1.47E-21	5.96E-21	1.62E-21	1.61E-21	2.15E-21	5.99E-21
U-235	4.00E-18	4.16E-18	3.59E-18	3.40E-18	9.04E-18	3.35E-18	3.41E-18	3.86E-18	4.40E-18
U-238	8.19E-22	1.06E-21	2.34E-22	2.18E-22	1.32E-21	2.19E-22	2.86E-22	5.52E-22	3.55E-21
Ac-228	3.36E-17	3.43E-17	3.07E-17	3.06E-17	4.70E-17	2.86E-17	2.96E-17	3.20E-17	3.87E-17
Bi-207	5.27E-17	5.38E-17	4.80E-17	4.77E-17	7.44E-17	4.47E-17	4.64E-17	5.02E-17	5.87E-17
Bi-210	2.03E-20	2.12E-20	1.77E-20	1.64E-20	4.71E-20	1.66E-20	1.67E-20	1.93E-20	1.20E-20
Bi-210m	7.72E-18	7.99E-18	6.91E-18	6.72E-18	1.42E-17	6.45E-18	6.62E-18	7.37E-18	8.48E-18
Bi-214	5.52E-17	5.57E-17	5.05E-17	5.07E-17	7.24E-17	4.75E-17	4.89E-17	5.25E-17	6.51E-17
Ra-226	1.76E-19	1.83E-19	1.58E-19	1.50E-19	3.93E-19	1.47E-19	1.50E-19	1.70E-19	1.94E-19
Eu-152	3.36E-17	3.43E-17	3.10E-17	3.09E-17	4.73E-17	2.90E-17	2.99E-17	3.22E-17	3.69E-17
Eu-154	3.66E-17	3.74E-17	3.39E-17	3.36E-17	5.08E-17	3.18E-17	3.27E-17	3.52E-17	4.10E-17
Np-237	4.37E-19	4.59E-19	3.78E-19	3.34E-19	1.25E-18	3.55E-19	3.53E-19	4.17E-19	5.03E-19
Pu-242	1.04E-21	1.23E-21	2.75E-22	2.93E-22	1.41E-21	3.57E-22	3.52E-22	6.85E-22	4.08E-21
Tc-99	7.35E-22	7.90E-22	5.71E-22	4.83E-22	2.10E-21	5.56E-22	5.39E-22	6.70E-22	9.06E-22
Po-210	2.94E-22	3.01E-22	2.68E-22	2.67E-22	4.10E-22	2.49E-22	2.59E-22	2.80E-22	3.25E-22

Table A-2. Dose coefficients for air submersion [Sv/(Bq s m<sup>-3</sup>)]<sup>a</sup>

Isotope	Gonad	Breast	Lung	R marrow	Bone surface	Thyroid	Remainder	Effective dose equivalent	Skin
Pu-238	6.56E-18	1.27E-17	1.06E-18	1.68E-18	9.30E-18	4.01E-18	1.99E-18	4.88E-18	4.09E-17
Pu-239/240	6.36E-18	1.23E-17	2.65E-18	2.67E-18	9.47E-18	3.92E-18	2.86E-18	4.75E-18	3.92E-17
Th-228	9.12E-17	1.09E-16	8.33E-17	7.32E-17	2.64E-16	8.88E-17	7.84E-17	9.20E-17	1.50E-16
Th-230	1.80E-17	2.38E-17	1.43E-17	1.22E-17	5.29E-17	1.63E-17	1.37E-17	1.74E-17	4.51E-17
Th-232	9.34E-18	1.36E-17	6.37E-18	5.52E-18	2.60E-17	7.90E-18	6.34E-18	8.72E-18	3.44E-17
Ac-227	5.78E-18	6.98E-18	5.22E-18	4.59E-18	1.68E-17	5.60E-18	4.92E-18	5.82E-18	1.10E-17
Ac-228	4.67E-14	5.30E-14	4.66E-14	4.56E-14	7.39E-14	4.79E-14	4.48E-14	4.78E-14	7.88E-14
Am-241	8.58E-16	1.07E-15	6.74E-16	5.21E-16	2.87E-15	7.83E-16	6.34E-16	8.18E-16	1.28E-15
Co-60	1.23E-13	1.39E-13	1.24E-13	1.23E-13	1.78E-13	1.27E-13	1.20E-13	1.26E-13	1.45E-13
Pa-231	1.71E-15	1.99E-15	1.62E-15	1.52E-15	3.64E-15	1.70E-15	1.54E-15	1.72E-15	2.44E-15
Bi-207	7.34E-14	8.38E-14	7.35E-14	7.17E-14	1.19E-13	7.55E-14	7.04E-14	7.54E-14	9.31E-14
Bi-210	3.32E-17	3.95E-17	2.95E-17	2.60E-17	8.98E-17	3.22E-17	2.79E-17	3.29E-17	2.30E-14
Cs-137	7.96E-18	9.67E-18	6.68E-18	5.70E-18	2.29E-17	7.55E-18	6.34E-18	7.74E-18	8.63E-15
Bi-210m	1.20E-14	1.37E-14	1.17E-14	1.10E-14	2.59E-14	1.21E-14	1.11E-14	1.22E-14	1.63E-14
Bi-214	7.44E-14	8.42E-14	7.51E-14	7.43E-14	1.09E-13	7.67E-14	7.26E-14	7.65E-14	1.28E-13
Np-237	1.04E-15	1.26E-15	9.02E-16	7.69E-16	3.20E-15	9.94E-16	8.50E-16	1.03E-15	1.54E-15
Eu-152	5.53E-14	6.29E-14	5.50E-14	5.37E-14	8.89E-14	5.66E-14	5.28E-14	5.65E-14	6.90E-14
Eu-154	6.00E-14	6.81E-14	5.99E-14	5.87E-14	9.43E-14	6.15E-14	5.75E-14	6.14E-14	8.29E-14
Pu-242	5.34E-18	1.03E-17	9.69E-19	1.43E-18	7.90E-18	3.32E-18	1.68E-18	4.01E-18	3.27E-17
Sr-90									
Tc-99	1.74E-18	2.20E-18	1.29E-18	1.05E-18	5.17E-18	1.57E-18	1.24E-18	1.62E-18	2.74E-15
Po-210	4.08E-19	4.63E-19	4.06E-19	3.97E-19	6.39E-19	4.18E-19	3.89E-19	4.16E-19	4.18E-19

a. Eckerman, K. F., and J. C. Ryman, 1993

**ATTACHMENT B**  
**MOUND OFFSITE ENVIRONMENTAL AIR-SAMPLING DATA FOR 1948 TO SEPTEMBER 1959**  
Page 1 of 7

**LIST OF TABLES**

<u><b>TABLE</b></u>	<u><b>TITLE</b></u>	<u><b>PAGE</b></u>
B-1	Mound offsite air-sampling data for 1948 to 1959.....	53

**ATTACHMENT B**  
**MOUND OFFSITE ENVIRONMENTAL AIR-SAMPLING DATA FOR 1948 TO SEPTEMBER 1959**  
Page 2 of 7

Table B-1. Mound offsite air-sampling data for 1948 to 1959.

Reference	Description of data	Maximum		
		(cpm/cm <sup>3</sup> )	(dpm/cm <sup>3</sup> ) <sup>a</sup>	( $\mu$ Ci/cm <sup>3</sup> )
<b>1948</b>				
Bradley and Haring 1948a	Missing pages - No offsite air sample data available for September.	--	--	--
Bradley and Haring 1948b	67 offsite samples were collected during October: 62.7% of results were 0 cpm/m <sup>3</sup> 26.9% of results were 1-10 cpm/m <sup>3</sup> 6.0% of results were 11 to 20 cpm/m <sup>3</sup> 4.4% of results were 21 to 40 cpm/m <sup>3</sup> 0% of results were > 41 cpm/m <sup>3</sup>	4.1E-05	2.05E-04	9.23E-11
Bradley and Haring 1948c	Missing pages - No offsite air sample data available for November.	--	--	--
Bradley and Haring 1948d	68 offsite samples were collected during December: 54.4% of the results were 0 cpm/m <sup>3</sup> 33.8% of the results were 1-10 cpm/m <sup>3</sup> 5.9% of the results were 11 to 20 cpm/m <sup>3</sup> 4.5% of the results were 21 to 40 cpm/m <sup>3</sup> 0% of the results were 41 to 80 cpm/m <sup>3</sup> 31.4% of the results were > 80 cpm/m <sup>3</sup>	8.0E-05	4.00E-04	1.80E-10
<b>1949</b>				
Bradley and Haring 1949a	Missing pages - No offsite air sample data available	--	--	--
Bradley and Haring 1949b	66 offsite samples were collected during February: 94.8% of the results were 1-10 cpm/m <sup>3</sup> 2.6% of the results were 11 to cpm/m <sup>3</sup> 1.3% of the results were 21 to cpm/m <sup>3</sup> 0% of the results were 41-80 cpm/m <sup>3</sup> 1.3% of the results were > 80 cpm/m <sup>3</sup>	8.0E-05	4.00E-04	1.80E-10
Bradley and Haring 1949c	49 offsite samples were collected during March: 47.3% of the results were 0 cpm/m <sup>3</sup> 34.0% of the results were 1-10 cpm/m <sup>3</sup> 17.0% of the results were 11 to 20 cpm/m <sup>3</sup> 0% of the results were 21 to 40 cpm/m <sup>3</sup> 1.7% of the results were 41-80 cpm/m <sup>3</sup> 0% of the results were > 80 cpm/m <sup>3</sup>	8.0E-05	4.00E-04	1.80E-10
Bradley and Haring 1949d	106 offsite samples were collected during April: 40.6% of the results were 0 cpm/m <sup>3</sup> 56.6% of the results were 1-10 cpm/m <sup>3</sup> 2.8% of the results were 11 to 20 cpm/m <sup>3</sup> 0% of the results were > 20 cpm/m <sup>3</sup> .	2.0E-05	1.00E-04	4.50E-11
Bradley and Haring 1949e	62 offsite samples were collected during May: 83.9% of the results were 0 cpm/m <sup>3</sup> 14.5% of the results were 1-10 cpm/m <sup>3</sup> 0% of the results were 11 to 20 cpm/m <sup>3</sup> 0% of the results were 21 to 40 cpm/m <sup>3</sup> 1.6% of the results were 41 to 80 cpm/m <sup>3</sup> 0% of the results were > 80 cpm/m <sup>3</sup>	8.0E-5	4.0E-4	1.8E-10
Bradley and Haring 1949f	<i>June offsite air sample data pages missing.</i>	--	--	--
Bradley and Haring 1949g	61 offsite samples were collected during July: 63.9% of the results were 0 cpm/m <sup>3</sup> 34.4% of the results were 1-10 cpm/m <sup>3</sup> 1.7% of the results were 11 to 20 cpm/m <sup>3</sup> 0% of the results were > 20 cpm/m <sup>3</sup>	2.0E-5	9.0E-12	4.5E-11
Bradley and Haring 1949h	64 offsite samples were collected during August: 67.2% of the results were 0 cpm/m <sup>3</sup> 34.4% of the results were 1-10 cpm/m <sup>3</sup> 1.5% of the results were 11 to 20 cpm/m <sup>3</sup> 0% of the results were > 20 cpm/m <sup>3</sup>	2.0E-5	9.0E-12	4.5E-11
Bradley and Haring 1949i	16 offsite samples were collected during September: 1.25% of the results were 0 cpm/m <sup>3</sup> 56.25% of the results were 1-10 cpm/m <sup>3</sup> 6.25% of the results were 11 to 20 cpm/m <sup>3</sup> 6.25% of the results were 21 to 40 cpm/m <sup>3</sup> 0% of the results were > 40 cpm/m <sup>3</sup>	4.0E-05	2.00E-04	9.01E-11

**ATTACHMENT B**  
**MOUND OFFSITE ENVIRONMENTAL AIR-SAMPLING DATA FOR 1948 TO SEPTEMBER 1959**  
Page 3 of 7

Reference	Description of data	Maximum		
		(cpm/cm <sup>3</sup> )	(dpm/cm <sup>3</sup> ) <sup>a</sup>	(μCi/cm <sup>3</sup> )
Bradley and Haring 1949j	62 offsite samples were collected down wind from Mound Laboratory in October: 37.1% of the results were 0 dpm/m <sup>3</sup> 62.9% of the results were 1 to 20 dpm/m <sup>3</sup> 0% of the results were > 20 dpm/m <sup>3</sup>	--	2.00E-05	9.01E-12
Bradley and Haring 1949k	61 offsite samples were collected down wind from Mound Laboratory in November: 55.7% of the results were 0 dpm/m <sup>3</sup> 44.3% of the results were 1 to 20 dpm/m <sup>3</sup> 0% of the results were > 20 dpm/m <sup>3</sup>	--	2.00E-05	9.01E-12
Bradley and Haring 1949l	53 offsite samples were collected down wind from Mound Laboratory December: 17.0% of the results were 0 dpm/m <sup>3</sup> 83.0% of the results were 1 to 20 dpm/m <sup>3</sup> 0% of the results were > 20 dpm/m <sup>3</sup> .	--	2.00E-05	9.01E-12
<b>1950</b>				
Bradley and Haring 1950a	75 offsite samples were collected during January: 57.3% of the results were 0 dpm/m <sup>3</sup> 42.6% of the results were 1-10 dpm/m <sup>3</sup> 0% of the results were > 20 dpm/m <sup>3</sup>	--	2.00E-05	9.01E-12
Bradley and Haring 1950b	74 offsite samples were collected during February: 52.7% of the results were 0 dpm/m <sup>3</sup> 47.3% of the results were 1-10 dpm/m <sup>3</sup> 0% of the results were > 20 dpm/m <sup>3</sup>	--	2.00E-05	9.01E-12
Bradley and Haring 1950c	85 offsite samples were collected during March: 63.5% of the results were 0 dpm/m <sup>3</sup> 36.5% of the results were 1-20 dpm/m <sup>3</sup> 0% of the results were > 20 dpm/m <sup>3</sup>	--	2.00E-05	9.01E-12
Bradley and Haring 1950d	90 offsite samples were collected during April: 61.1% of the results were 0 dpm/m <sup>3</sup> 38.9% of the results were 1-20 dpm/m <sup>3</sup> 0% of the results were > 20 dpm/m <sup>3</sup>	--	2.00E-05	9.01E-12
Bradley and Haring 1950e	75 offsite samples were collected during May: 70.4% of the results were 0 dpm/m <sup>3</sup> 29.6% of the results were 1-20 dpm/m <sup>3</sup> 0% of the results were > 20 dpm/m <sup>3</sup>	--	2.00E-05	9.01E-12
Bradley and Haring 1950f	74 offsite samples were collected during June: 55.4% of the results were 0 dpm/m <sup>3</sup> 44.6% of the results were 1-20 dpm/m <sup>3</sup> 0% of the results were > 20 dpm/m <sup>3</sup>	--	2.00E-05	9.01E-12
Bradley and Haring 1950g	89 offsite samples were collected during July: 61.8% of the results were 0 dpm/m <sup>3</sup> 38.2% of the results were 1-20 dpm/m <sup>3</sup> 0% of the results were > 20 dpm/m <sup>3</sup>	--	2.00E-05	9.01E-12
Bradley and Haring 1950h	69 offsite samples were collected during August: 62.3% of the results were 0 dpm/m <sup>3</sup> 37.3% of the results were 1-20 dpm/m <sup>3</sup> 0% of the results were > 20 dpm/m <sup>3</sup>	--	2.00E-05	9.01E-12
Bradley and Haring 1950i	84 offsite samples were collected during September: 45.2% of the results were 0 dpm/m <sup>3</sup> 54.8% of the results were 1-20 dpm/m <sup>3</sup> 0% of the results were > 20 dpm/m <sup>3</sup>	--	2.00E-05	9.01E-12
Bradley and Haring 1950j	74 offsite samples were collected during October: 59.5% of the results were 0 dpm/m <sup>3</sup> 40.5% of the results were 1-20 dpm/m <sup>3</sup> 0% of the results were > 20 dpm/m <sup>3</sup>	--	2.00E-05	9.01E-12
Bradley and Haring 1950k	78 offsite samples were collected during November: 83.3% of the results were 0 dpm/m <sup>3</sup> 16.7% of the results were 1-20 dpm/m <sup>3</sup> 0% of the results were > 20 dpm/m <sup>3</sup>	--	2.00E-05	9.01E-12
Bradley and Haring 1950l	27 offsite samples were collected during December: 63% of the results were 0 dpm/m <sup>3</sup> 37% of the results were 1-20 dpm/m <sup>3</sup> 0% of the results were > 20 dpm/m <sup>3</sup>	--	2.00E-05	9.01E-12

**ATTACHMENT B**  
**MOUND OFFSITE ENVIRONMENTAL AIR-SAMPLING DATA FOR 1948 TO SEPTEMBER 1959**  
Page 4 of 7

Reference	Description of data	Maximum		
		(cpm/cm <sup>3</sup> )	(dpm/cm <sup>3</sup> ) <sup>a</sup>	( $\mu$ Ci/cm <sup>3</sup> )
<b>1951</b>				
Bradley and Burbage 1951a	85 offsite samples were collected during January: 83.6% of the results were 0 dpm/m <sup>3</sup> 16.4% of the results were 1-20 dpm/m <sup>3</sup> 0% of the results were > 20 dpm/m <sup>3</sup>	--	2.00E-05	9.01E-12
Bradley and Burbage 1951b	85 offsite samples were collected during February: 78.8% of the results were 0 dpm/m <sup>3</sup> 21.2% of the results were 1-20 dpm/m <sup>3</sup> 0% of the results were > 20 dpm/m <sup>3</sup>	--	2.00E-05	9.01E-12
Bradley and Burbage 1951c	73 offsite samples were collected during March: 71.2% of the results were 0 dpm/m <sup>3</sup> 28.8% of the results were 1-20 dpm/m <sup>3</sup> 0% of the results were > 20 dpm/m <sup>3</sup>	--	2.00E-05	9.01E-12
Bradley and Burbage 1951d	78 offsite samples were collected during April: 78.2% of the results were 0 dpm/m <sup>3</sup> 21.8% of the results were 1-20 dpm/m <sup>3</sup> 0% of the results were > 20 dpm/m <sup>3</sup>	--	2.00E-05	9.01E-12
Bradley and Burbage 1951e	<i>May offsite air sample data pages missing.</i>	--	--	--
Bradley and Burbage 1951f	71 offsite samples were collected during June: 66.2% of the results were 0 dpm/m <sup>3</sup> 33.8% of the results were 1-20 dpm/m <sup>3</sup> 0% of the results were > 20 dpm/m <sup>3</sup>	--	2.00E-05	9.01E-12
Bradley and Burbage 1951g	55 offsite samples were collected during July: 61.8% of the results were 0 dpm/m <sup>3</sup> 38.2% of the results were 1-20 dpm/m <sup>3</sup> 0% of the results were > 20 dpm/m <sup>3</sup>	--	2.00E-05	9.01E-12
Bradley and Burbage 1951h	85 offsite samples were collected during August: 95.3% of the results were 0 dpm/m <sup>3</sup> 4.7% of the results were 1-20 dpm/m <sup>3</sup> 0% of the results were > 20 dpm/m <sup>3</sup>	--	2.00E-05	9.01E-12
Bradley and Burbage 1951i	42 offsite samples were collected during September: 0% of the results were > 10 dpm/m <sup>3</sup>	--	1.00E-05	4.50E-12
Bradley and Burbage 1951j	94 offsite samples were collected during October: 93 of the results were 0 dpm/m <sup>3</sup> 1 result was 6 dpm/m <sup>3</sup>	--	6.00E-06	2.70E-12
Bradley and Burbage 1951k	57 offsite samples were collected during November: 55 of the results were 0 dpm/m <sup>3</sup> 2 results were between 1 and 10 dpm/m <sup>3</sup>	--	1.00E-05	4.50E-12
Bradley and Burbage 1951l	44 offsite samples were collected during November: 35 of the results were 0 dpm/m <sup>3</sup> 9 results were < 20 dpm/m <sup>3</sup>	--	2.00E-05	9.01E-12
<b>1952</b>				
Bradley and Burbage 1952a	87 offsite samples were collected during January: 67 of the results were 0 dpm/m <sup>3</sup> 20 results were between 1 and 10 dpm/m <sup>3</sup>	--	--	--
Bradley and Burbage 1952b	60 offsite samples were collected during February: 50 of the results were 0 dpm/m <sup>3</sup> 10 results were between 1 and 10 dpm/m <sup>3</sup>	--	1.00E-05	4.50E-12
Bradley and Burbage 1952c	71 offsite samples were collected during March: 47 of the results were 0 dpm/m <sup>3</sup> 14 results were less than 20 dpm/m <sup>3</sup>	--	2.00E-05	9.01E-12
Bradley and Burbage 1952d	78 offsite samples were collected during April: 43 of the results were 0 dpm/m <sup>3</sup> 35 results were less than 20 dpm/m <sup>3</sup>	--	2.00E-05	9.01E-12
Bradley and Burbage 1952e	33 offsite samples were collected during May: 24 of the results were 0 dpm/m <sup>3</sup> 9 results were less than 20 dpm/m <sup>3</sup>	--	2.00E-05	9.01E-12
Bradley and Burbage 1952f	86 offsite samples were collected during June: 51 of the results were 0 dpm/m <sup>3</sup> 35 results were less than 20 dpm/m <sup>3</sup>	--	2.00E-05	9.01E-12

**ATTACHMENT B**  
**MOUND OFFSITE ENVIRONMENTAL AIR-SAMPLING DATA FOR 1948 TO SEPTEMBER 1959**  
Page 5 of 7

Reference	Description of data	Maximum		
		(cpm/cm <sup>3</sup> )	(dpm/cm <sup>3</sup> ) <sup>a</sup>	( $\mu$ Ci/cm <sup>3</sup> )
Bradley and Burbage 1952g	83 offsite samples were collected during July: 41 of the results were 0 dpm/m <sup>3</sup> 41 results were between 1 and 20 dpm/m <sup>3</sup> 1 result was between 20 and 40 dpm/m <sup>3</sup>	--	4.00E-05	1.80E-11
Bradley 1952a	41 offsite samples were collected during August: 20 of the results were 0 dpm/m <sup>3</sup> 21 results were between 1 and 20 dpm/m <sup>3</sup>	--	2.00E-05	9.01E-12
Bradley 1952b	66 offsite samples were collected during September: 32 of the results were 0 dpm/m <sup>3</sup> 32 results were between 1 and 20 dpm/m <sup>3</sup> 2 results were between 21 and 40 dpm/m <sup>3</sup>	--	4.00E-05	1.80E-11
Bradley 1952c	82 offsite samples were collected during October: 50 of the results were 0 dpm/m <sup>3</sup> 31 results were between 1 and 20 dpm/m <sup>3</sup> 1 result was between 21 and 40 dpm/m <sup>3</sup>	--	4.00E-05	1.80E-11
Bradley 1952d	56 offsite samples were collected during November: 35 of the results were 0 dpm/m <sup>3</sup> ("below background") 21 results were between 1 and 20 dpm/m <sup>3</sup>	--	2.00E-05	9.01E-12
Bradley 1952e	78 offsite samples were collected during December: 55 of the results were 0 dpm/m <sup>3</sup> 21 results were between 1 and 20 dpm/m <sup>3</sup> 2 results were between 21 and 40 dpm/m <sup>3</sup>	--	4.00E-05	1.80E-11
<b>1953</b>				
Bradley 1953b	65 offsite samples were collected during January: Thirty-six of these samples gave no evidence of airborne contamination. Of the remaining 29, the highest yield was 17.3 dpm/m <sup>3</sup> .	--	1.73E-05	7.80E-12
Bradley 1953c	61 offsite samples were collected during February: 42 of the results were 0 dpm/m <sup>3</sup> 19 results were between 1 and 16 dpm/m <sup>3</sup>	--	1.60E-05	7.20E-12
Bradley 1953d	73 offsite samples were collected during March: 71% of the results were 0 dpm/m <sup>3</sup> The 2 highest results were 15 dpm/m <sup>3</sup>	--	1.50E-05	6.80E-12
Bradley 1953e	29 offsite samples were collected during April: 65% of the results were 0 dpm/m <sup>3</sup> The highest result was 11 dpm/m <sup>3</sup>	--	1.10E-05	5.00E-12
Bradley 1953f	25 offsite samples were collected during May: 44% of the results were 0 dpm/m <sup>3</sup> The highest result was 10 dpm/m <sup>3</sup>	--	1.00E-05	4.50E-12
Bradley 1953g	9 offsite samples were collected during June: 55% of the results were 0 dpm/m <sup>3</sup> The highest result was 16 dpm/m <sup>3</sup>	--	1.60E-05	7.20E-12
Bradley 1953h	8 offsite samples were collected during July: 7 of the results were 0 dpm/m <sup>3</sup> 1 result was 3 dpm/m <sup>3</sup>	--	3.00E-06	1.40E-12
Bradley 1953i	Zero offsite samples were collected during August.	--	--	--
Bradley 1953j	9 offsite samples were collected during September: The highest result was 4 dpm/m <sup>3</sup>	--	4.00E-06	1.80E-12
Bradley 1953k	17 offsite samples were collected during October: The highest result was 14.4 dpm/m <sup>3</sup>	--	1.40E-05	6.50E-12
Bradley 1953l	18 offsite samples were collected during November: The highest result was 10.6 dpm/m <sup>3</sup>	--	1.06E-05	4.80E-12
Bradley 1953m	31 offsite samples were collected during December: The highest result was 5.4 dpm/m <sup>3</sup>	--	5.40E-06	2.40E-12
<b>1954</b>				
Bradley 1954a	Zero offsite samples were collected during January.	--	--	--
Bradley 1954b	35 offsite samples were collected during February: The highest result was 7 dpm/m <sup>3</sup>	--	7.00E-06	3.20E-12
Bradley 1954c	31 offsite samples were collected during March: 16% of the results were 0 dpm/m <sup>3</sup> The highest result was 3 dpm/m <sup>3</sup>	--	3.00E-06	1.40E-12



**ATTACHMENT B**  
**MOUND OFFSITE ENVIRONMENTAL AIR-SAMPLING DATA FOR 1948 TO SEPTEMBER 1959**  
Page 6 of 7

Reference	Description of data	Maximum		
		(cpm/cm <sup>3</sup> )	(dpm/cm <sup>3</sup> ) <sup>a</sup>	( $\mu$ Ci/cm <sup>3</sup> )
Bradley 1954d	Complete data for April, May, and June is missing.	--	--	--
Bradley 1954e	47 samples were collected during July, August, and September: 19 of the results were 0 $\mu$ Ci/cm <sup>3</sup> The maximum result was $1 \times 10^{-12}$ $\mu$ Ci/cm <sup>3</sup>	--	--	1.0E-12
Meyer 1955a	84 samples were collected during October, November, and December: 25 of the results were 0 $\mu$ Ci/cm <sup>3</sup> The maximum result was $3.3 \times 10^{-12}$ $\mu$ Ci/cm <sup>3</sup>	--	--	3.3E-12
<b>1955</b>				
Meyer 1955b	79 samples were collected during January, February, and March: 32 of the results were 0 $\mu$ Ci/cm <sup>3</sup> The maximum result was $2.7 \times 10^{-13}$ $\mu$ Ci/cm <sup>3</sup>	--	--	$2.7 \times 10^{-13}$
Meyer 1955c	79 samples were collected during April, May, and June: 59 of the results were 0 $\mu$ Ci/cm <sup>3</sup> The maximum result was $3 \times 10^{-12}$ $\mu$ Ci/cm <sup>3</sup>	--	--	$3.0 \times 10^{-12}$
Meyer 1955d	65 samples were collected during July, August, and September: 64 of the results were 0 $\mu$ Ci/cm <sup>3</sup> The maximum result was $1.1 \times 10^{-12}$ $\mu$ Ci/cm <sup>3</sup>	--	--	$1.1 \times 10^{-12}$
Meyer 1956a	67 samples were collected during October, November, and December: 65 of the results were 0 $\mu$ Ci/cm <sup>3</sup> The maximum result was $5.8 \times 10^{-13}$ $\mu$ Ci/cm <sup>3</sup>	--	--	$5.8 \times 10^{-13}$
<b>1956</b>				
Meyer 1956b	30 samples were collected during January, February, and March: 25 of the results were 0 $\mu$ Ci/cm <sup>3</sup> The maximum result was $1.93 \times 10^{-12}$ $\mu$ Ci/cm <sup>3</sup> Po	--	--	$1.93 \times 10^{-12}$
Meyer 1956c	65 samples were collected during April, May, and June: 50 of the results were 0 $\mu$ Ci/cm <sup>3</sup> The maximum result was $7.2 \times 10^{-13}$ $\mu$ Ci/cm <sup>3</sup> Po	--	--	$7.2 \times 10^{-13}$
--	<i>Data for July, August, and September is unavailable.</i>	--	--	--
Meyer 1957a	67 samples were collected during October, November, and December: 58 of the results were 0 $\mu$ Ci/cm <sup>3</sup> The maximum result was $1.95 \times 10^{-11}$ $\mu$ Ci/cm <sup>3</sup> Po	--	--	$1.95 \times 10^{-11}$
<b>1957</b>				
Meyer 1957b	67 samples were collected during January, February, and March: 62 of the results were 0 $\mu$ Ci/cm <sup>3</sup> The maximum result was $1.27 \times 10^{-12}$ $\mu$ Ci/cm <sup>3</sup> Po	--	--	$1.27 \times 10^{-12}$
Meyer 1957c	67 samples were collected during April, May, and June: 56 of the results were 0 $\mu$ Ci/cm <sup>3</sup> The maximum result was $3.85 \times 10^{-12}$ $\mu$ Ci/cm <sup>3</sup> Po	--	--	$3.85 \times 10^{-12}$
Meyer 1957d	67 samples were collected during July, August, and September: 33 of the results were 0 $\mu$ Ci/cm <sup>3</sup> The maximum result was $2.75 \times 10^{-12}$ $\mu$ Ci/cm <sup>3</sup> Po	--	--	$2.75 \times 10^{-12}$
Meyer 1958a	67 samples were collected during October, November, and December: 51 of the results were 0 $\mu$ Ci/cm <sup>3</sup> The maximum result was $1.28 \times 10^{-12}$ $\mu$ Ci/cm <sup>3</sup> Po	--	--	$1.28 \times 10^{-12}$
<b>1958</b>				
Meyer 1958b	66 samples were collected during January, February, and March: 51 of the results were 0 $\mu$ Ci/cm <sup>3</sup> The maximum result was $4.46 \times 10^{-12}$ $\mu$ Ci/cm <sup>3</sup> Po	--	--	$4.46 \times 10^{-12}$
Meyer 1958c	55 samples were collected during April, May, and June: 51 of the results were 0 $\mu$ Ci/cm <sup>3</sup> The maximum result was $1.03 \times 10^{-12}$ $\mu$ Ci/cm <sup>3</sup> Po	--	--	$1.03 \times 10^{-12}$
Meyer 1958d	76 samples were collected during July, August, and September: 69 of the results were 0 $\mu$ Ci/cm <sup>3</sup> The maximum result was $6.56 \times 10^{-11}$ $\mu$ Ci/cm <sup>3</sup> Po	--	--	$6.56 \times 10^{-11}$
Meyer 1959a	67 samples were collected during October, November, and December: 62 of the results were 0 $\mu$ Ci/cm <sup>3</sup> The maximum result was $6.31 \times 10^{-13}$ $\mu$ Ci/cm <sup>3</sup> Po	--	--	$6.31 \times 10^{-13}$

**ATTACHMENT B**  
**MOUND OFFSITE ENVIRONMENTAL AIR-SAMPLING DATA FOR 1948 TO SEPTEMBER 1959**  
Page 7 of 7

Reference	Description of data	Maximum		
		(cpm/cm <sup>3</sup> )	(dpm/cm <sup>3</sup> ) <sup>a</sup>	(μCi/cm <sup>3</sup> )
<b>1959</b>				
Meyer 1959b	67 samples were collected during January, February, and March: 59 of the results were 0 μCi/cm <sup>3</sup> The maximum result was $7.03 \times 10^{-13}$ μCi/cm <sup>3</sup> Po	--	--	$7.03 \times 10^{-13}$
--	<i>Data for April, May, and June is unavailable.</i>	Z	--	--
Meyer 1959c	36 samples were collected during July, August, and September: 35 of the results were 0 μCi/cm <sup>3</sup> The maximum result was $3.87 \times 10^{-13}$ μCi/cm <sup>3</sup>	--	--	$3.87 \times 10^{-13}$

a. 20% detector efficiency assumed to convert α cpm cm<sup>-3</sup> to α dpm cm<sup>-3</sup>.

b. -- = no data

**ATTACHMENT C**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1959 TO 1972**  
Page 1 of 9

**LIST OF TABLES**

<b><u>TABLE</u></b>	<b><u>TITLE</u></b>	<b><u>PAGE</u></b>
C-1	Mound offsite air-monitoring data for 1959 .....	60
C-2	Mound offsite air-monitoring data for 1960 .....	60
C-3	Mound offsite air-monitoring data for 1961 .....	60
C-4	Mound offsite air-monitoring data for 1962 .....	61
C-5	Mound offsite air-monitoring data for January – June 1963 .....	61
C-6	Mound offsite air-monitoring data for 1964 .....	61
C-7	Mound offsite air-monitoring data for 1965 .....	62
C-8	Mound offsite air-monitoring data for 1966 .....	62
C-9	Mound offsite air-monitoring data for 1967 .....	63
C-10	Mound offsite air-monitoring data for 1968 .....	64
C-11	Mound offsite air-monitoring data for 1969 .....	65
C-12	Mound offsite air-monitoring data for 1970 .....	66
C-13	Mound air-monitoring data for 1971 .....	66
C-14	Mound air-monitoring data for 1972 .....	67

### ATTACHMENT C MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1959 TO 1972

Page 2 of 9

Table C-1. Mound offsite air-monitoring data for 1959.<sup>a</sup>

Location	HTO offsite concentration (10 <sup>-12</sup> μCi/ml)						<sup>210</sup> Po offsite concentration (10 <sup>-18</sup> μCi/ml) <sup>b</sup>							
	Samples	LDL	Min	Max	Mean	Mean	Samples	LDL	Min	Max	Mean	Mean		
12 locations – 0 to 5 miles	--	(c)	(c)	(c)	--	--	--	--	--	--	123,000	--		
15 locations – 5 to 15 miles	--	(c)	(c)	(c)	--	--	--	--	--	--	118,000	--		
20 locations – 15 to 30 miles	--	(c)	(c)	(c)	--	--	--	--	--	--	94,000	--		
14 locations – 30 to 40 miles	--	(c)	(c)	(c)	--	--	--	--	--	--	116,000	--		
N	--	--	--	--	--	--	--	--	--	--	4	--		
Min	--	--	--	--	--	--	--	--	--	--	94,000	--		
Max	--	--	--	--	--	--	--	--	--	--	123,000	--		
Median	--	--	--	--	--	--	--	--	--	--	117,000	--		
Mean	--	--	--	--	--	--	--	--	--	--	112,750	--		
StdDev	--	--	--	--	--	--	--	--	--	--	12,842	--		
	Effluent intake concentration						(d)	Effluent intake concentration						(d)
Reference	Monsanto 1960													

- a. LDL = lower detection limit; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.
- b. Gross alpha including naturally occurring alpha.
- c. All values not detectable prior to 1967 (Anderson, Sheehan, and Meyer 1966).
- d. Not used (derived by alternate method).

Table C-2. Mound offsite air-monitoring data for 1960.<sup>a</sup>

Location	HTO offsite concentration (10 <sup>-12</sup> μCi/ml)						Pu – Po offsite concentration (10 <sup>-18</sup> μCi/ml) <sup>b</sup>							
	Samples	LDL	Min	Max	Mean	Mean	Samples	LDL	Min	Max	Mean	Mean		
All locations 1st Qrt.	119	(c)	(c)	(c)	--	--	119	--	--	--	27,100	--		
All locations 2nd Qrt.	146	(c)	(c)	(c)	--	--	146	--	--	--	24,200	--		
All locations 3rd Qrt.	117	(c)	(c)	(c)	--	--	117	--	--	1,171	10,500	--		
All locations 4th Qrt.	154	(c)	(c)	(c)	--	--	154	--	--	3,153	19,800	--		
N	536	--	--	--	--	--	536	--	--	2	4	--		
Min	--	--	--	--	--	--	--	--	--	117,100	10,500	--		
Max	--	--	--	--	--	--	--	--	--	315,300	27,100	--		
Median	--	--	--	--	--	--	--	--	--	216,200	22,000	--		
Mean	--	--	--	--	--	--	--	--	--	216,200	20,400	--		
StdDev	--	--	--	--	--	--	--	--	--	140,149	7,250	--		
	Effluent intake concentration						(d)	Effluent intake concentration						(d)
Reference	Monsanto 1961a													

- a. LDL = lower detection limit; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.
- b. Gross alpha; no discrimination between Pu and Po.
- c. All values not detectable prior to 1967 (Anderson, Sheehan, and Meyer 1966).
- d. Not used (derived by alternate method).

Table C-3. Mound offsite air-monitoring data for 1961.<sup>a</sup>

Location	HTO offsite concentration (10 <sup>-12</sup> μCi/ml)						Pu – Po offsite concentration (10 <sup>-18</sup> μCi/ml) <sup>b</sup>							
	Samples	LDL	Min	Max	Mean	Mean	Samples	LDL	Min	Max	Mean	Mean		
All locations 1st Qrt.	154	(c)	(c)	(c)	(c)	(c)	154	--	--	90,100	9,300	--		
All locations 3rd Qrt.	179	(c)	(c)	(c)	(c)	(c)	155	--	--	54,000	12,000	--		
All locations 4th Qrt.	183	(c)	(c)	(c)	(c)	(c)	159	--	--	1,413,000	25,400	--		
N	516	--	--	--	--	--	468	--	--	3	3	--		
Min	--	--	--	--	--	--	--	--	--	54,000	9,300	--		
Max	--	--	--	--	--	--	--	--	--	1,413,000	25,400	--		
Median	--	--	--	--	--	--	--	--	--	90,100	12,000	--		
Mean	--	--	--	--	--	--	--	--	--	519,033	15,567	--		
StdDev	--	--	--	--	--	--	--	--	--	774,408	8,622	--		
	Effluent intake concentration						(d)	Effluent intake concentration						(d)
Reference	Monsanto 1961b, Adams 1961, Adams 1962a													

- a. LDL = lower detection limit; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.
- b. Downwind sample gross alpha; no discrimination between Pu and Po.
- c. All values not detectable prior to 1967 (Anderson, Sheehan, and Meyer 1966).
- d. Not used (derived by alternate method).

### ATTACHMENT C MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1959 TO 1972

Page 3 of 9

Table C-4. Mound offsite air-monitoring data for 1962.<sup>a</sup>

Location	HTO offsite concentration (10 <sup>-12</sup> μCi/ml)						Pu – Po offsite concentration (10 <sup>-18</sup> μCi/ml) <sup>b</sup>							
	Samples	LDL	Min	Max	Mean	Mean	Samples	LDL	Min	Max	Mean	Mean		
Upwind locations	18	(c)	(c)	(c)	(c)	(c)	18	--	--	9,400	1,100	--		
Downwind locations	115	(c)	(c)	(c)	(c)	(c)	115	--	--	60,700	1,900	--		
N	133	--	--	--	--	--	133	--	--	2	2	--		
Min	--	--	--	--	--	--	--	--	--	9,400	1,100	--		
Max	--	--	--	--	--	--	--	--	--	60,700	1,900	--		
Median	--	--	--	--	--	--	--	--	--	35,050	1,500	--		
Mean	--	--	--	--	--	--	--	--	--	35,050	1,500	--		
StdDev	--	--	--	--	--	--	--	--	--	36,275	566	--		
	Effluent intake concentration						(d)	Effluent intake concentration						(d)
Reference	Adams 1962b, Adams and Meyer 1963a													

- a. LDL = lower detection limit; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.
- b. Gross alpha; no discrimination between Pu and Po.
- c. All values not detectable prior to 1967 (Anderson, Sheehan, and Meyer 1966).
- d. Not used (derived by alternate method).

Table C-5. Mound offsite air-monitoring data for January–June 1963.<sup>a</sup>

Location	HTO offsite concentration (10 <sup>-12</sup> μCi/ml)						Pu – Po offsite concentration (10 <sup>-18</sup> μCi/ml) <sup>b</sup>							
	Samples	LDL	Min	Max	Mean	Mean	Samples	LDL	Min	Max	Mean	Mean		
Upwind locations	26	(c)	(c)	(c)	(c)	(c)	26	--	--	20,700	3,400	--		
Downwind locations	154	(c)	(c)	(c)	(c)	(c)	154	--	--	41,800	3,000	--		
N	180	--	--	--	--	--	180	--	--	2	2	--		
Min	--	--	--	--	--	--	--	--	--	20,700	3,000	--		
Max	--	--	--	--	--	--	--	--	--	41,800	3,400	--		
Median	--	--	--	--	--	--	--	--	--	31,250	3,200	--		
Mean	--	--	--	--	--	--	--	--	--	31,250	3,200	--		
StdDev	--	--	--	--	--	--	--	--	--	14,920	283	--		
	Effluent intake concentration						(d)	Effluent intake concentration						(d)
Reference	Adams and Meyer 1963b													

- a. LDL = lower detection limit; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.
- b. Gross alpha; no discrimination between Pu and Po.
- c. All values not detectable prior to 1967 (Anderson, Sheehan, and Meyer 1966).
- d. Not used (derived by alternate method).

Table C-6. Mound offsite air-monitoring data for 1964.<sup>a</sup>

Location	HTO offsite concentration (10 <sup>-12</sup> μCi/ml)						Pu – Po offsite concentration (10 <sup>-18</sup> μCi/ml) <sup>b</sup>							
	Samples	LDL	Min	Max	Mean	Mean	Samples	LDL	Min	Max	Mean	Mean		
Upwind locations	94	(c)	(c)	(c)	(c)	(c)	94	--	--	43,700	2,550	--		
Downwind locations	566	(c)	(c)	(c)	(c)	(c)	566	--	--	144,000	3,600	--		
N	660	--	--	--	--	--	660	--	--	2	2	--		
Min	--	--	--	--	--	--	--	--	--	43,700	2,550	--		
Max	--	--	--	--	--	--	--	--	--	144,000	3,600	--		
Median	--	--	--	--	--	--	--	--	--	93,850	3,075	--		
Mean	--	--	--	--	--	--	--	--	--	93,850	3,075	--		
StdDev	--	--	--	--	--	--	--	--	--	70,923	742	--		
	Effluent intake concentration						(d)	Effluent intake concentration						(d)
Reference	Adams and Meyer 1964a, 1965a													

- a. -- = no data; BEL = below environmental level; LDL = lower detection limit; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.
- b. Gross alpha; no discrimination between Pu and Po.
- c. All values not detectable prior to 1967 (Anderson, Sheehan, and Meyer 1966).
- d. Not used (derived by alternate method).

**ATTACHMENT C  
MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1959 TO 1972**

Page 4 of 9

Table C-7. Mound offsite air-monitoring data for 1965.<sup>a</sup>

Location	HTO offsite concentration (10 <sup>-12</sup> μCi/ml)						Pu – Po offsite concentration (10 <sup>-18</sup> μCi/ml) <sup>b</sup>							
	Samples	LDL	Min	Max	Mean	Mean	Samples	LDL	Min	Max	Mean	Mean		
Upwind locations	104	(c)	(c)	(c)	(c)	(c)	104	--	--	27,000	2,500	--		
Downwind locations	620	(c)	(c)	(c)	(c)	(c)	620	--	--	82,800	2,600	--		
N	724	--	--	--	--	--	724	--	--	2	2	--		
Min	--	--	--	--	--	--	--	--	--	27,000	2,500	--		
Max	--	--	--	--	--	--	--	--	--	82,800	2,600	--		
Median	--	--	--	--	--	--	--	--	--	54,900	2,550	--		
Mean	--	--	--	--	--	--	--	--	--	54,900	2,550	--		
StdDev	--	--	--	--	--	--	--	--	--	39,457	71	--		
	Effluent intake concentration						(d)	Effluent intake concentration						(d)
Reference	Adams and Meyer 1965b, Adams, Anderson and Meyer 1966													

- a. LDL = lower detection limit; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.
- b. Gross alpha; no discrimination between Pu and Po.
- c. All values not detectable prior to 1967 (Anderson, Sheehan, and Meyer 1966).
- d. Not used (derived by alternate method).

Table C-8. Mound offsite air-monitoring data for 1966.<sup>a</sup>

Location	HTO offsite concentration (10 <sup>-12</sup> μCi/ml)						Pu – Po offsite concentration (10 <sup>-18</sup> μCi/ml) <sup>b</sup>							
	Samples	LDL	Min	Max	Mean	Mean	Samples	LDL	Min	Max	Mean	Mean		
0-3 miles upwind	77	(c)	(c)	(c)	(c)	(c)	77	3,500	--	16,800	3,900	--		
0-3 miles downwind	127	(c)	(c)	(c)	(c)	(c)	127	3,500	--	534,200	11,100	--		
3-5 miles downwind	82	(c)	(c)	(c)	(c)	(c)	82	3,500	--	12,900	4,300	--		
5-10 miles downwind	82	(c)	(c)	(c)	(c)	(c)	82	3,500	--	54,600	5,000	--		
10-15 miles downwind	87	(c)	(c)	(c)	(c)	(c)	87	3,500	--	23,200	5,000	--		
15-20 miles downwind	123	(c)	(c)	(c)	(c)	(c)	123	3,500	--	11,120	5,600	--		
N	578	--	--	--	--	--	578	--	--	6	6	--		
Min	--	--	--	--	--	--	--	3,500	--	11,120	3,900	--		
Max	--	--	--	--	--	--	--	3,500	--	534,200	11,100	--		
Median	--	--	--	--	--	--	--	3,500	--	20,000	5,000	--		
Mean	--	--	--	--	--	--	--	3,500	--	108,803	5,817	--		
StdDev	--	--	--	--	--	--	--	--	--	209,013	2,656	--		
	Effluent intake concentration						(d)	Effluent intake concentration						(d)
Reference	Anderson, Sheehan, and Meyer 1966, 1967a													

- a. LDL = lower detection limit unknown confidence level; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.
- b. Gross alpha; no discrimination between Pu and Po.
- c. All values not detectable prior to 1967 (Anderson, Sheehan, and Meyer 1966).
- d. Not used (derived by alternate method).

**ATTACHMENT C**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1959 TO 1972**

Page 5 of 9

Table C-9. Mound offsite air-monitoring data for 1967.<sup>a</sup>

Location	HTO offsite concentration (10 <sup>-12</sup> µCi/ml)						<sup>238</sup> Pu offsite concentration (10 <sup>-18</sup> µCi/ml) <sup>b</sup>					
	Samples	LDL	Min	Max	Mean	Mean	Samples	LDL	Min	Max	Mean	Mean
0-3 miles upwind	33	8,000	--	25,000	8,650	--	46	1,300	--	282,200	12,000	--
0-3 miles downwind	32	8,000	--	26,900	9,020	--	46	900	--	121,700	9,900	--
3-5 miles downwind	31	8,000	--	12,790	8,080	--	46	1,300	--	111,400	11,100	--
5-10 miles downwind	31	8,000	--	10,690	8,090	--	45	1,300	--	14,200	4,700	--
10-15 miles downwind	29	8,000	--	8,000	8,000	--	46	1,300	--	98,400	8,300	--
15-20 miles downwind	24	8,000	--	9,400	8,090	--	46	900	--	27,300	4,500	--
N	180	--	--	6	6	--	275	--	--	6	6	--
Min	--	8,000	--	8,000	8,000	--	--	900	--	14,200	4,500	--
Max	--	8,000	--	26,900	9,020	--	--	1,300	--	282,200	12,000	--
Median	--	8,000	--	11,740	8,090	--	--	1,300	--	104,900	9,100	--
Mean	--	8,000	--	15,463	8,322	--	--	1,167	--	109,200	8,417	--
StdDev	--	--	--	8,296	416	--	--	--	--	95,853	3,207	--
	Effluent intake concentration (c)						Effluent intake concentration (c)					
Reference	Anderson, Sheehan and Meyer 1967b, 1968a											

Location	<sup>210</sup> Po offsite concentration (10 <sup>-18</sup> µCi/ml) <sup>b</sup>					
	Samples	LDL	Min	Max	Mean	Mean
0-3 miles upwind	45	8,000	--	669,000	33,300	--
0-3 miles downwind	44	5,300	--	104,700	15,300	--
3-5 miles downwind	45	8,000	--	689,200	35,200	--
5-10 miles downwind	45	8,000	--	99,100	22,500	--
10-15 miles downwind	45	8,000	--	80,000	19,700	--
15-20 miles downwind	44	5,300	--	36,600	14,100	--
N	268	--	--	6	6	--
Min	--	5,300	--	36,600	14,100	--
Max	--	8,000	--	689,200	35,200	--
Median	--	8,000	--	101,900	21,100	--
Mean	--	7,100	--	279,767	23,350	--
StdDev	--	--	--	310,311	8,987	--
	Effluent intake concentration (c)					
Source	Anderson, Sheehan, and Meyer 1968a, Table 5					

- a. LDL = lower detection limit unknown confidence level; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.  
b. Gross alpha attributed to Pu-238 after separation of Po (naturally occurring alpha is included).  
c. Not used (derived by alternate method).

**ATTACHMENT C**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1959 TO 1972**

Page 6 of 9

Table C-10. Mound offsite air-monitoring data for 1968.<sup>a</sup>

Location	<sup>3</sup> HTO offsite concentration (10 <sup>-12</sup> μCi/ml)						<sup>238</sup> Pu offsite concentration (10 <sup>-18</sup> μCi/ml) <sup>b</sup>					
	Samples	LDL	Min	Max	Mean	Mean	Samples	LDL	Min	Max	Mean	Mean
0-3 miles upwind	40	2,000	--	16,550	3,690	--	38	1,300	--	37,900	11,900	--
0-3 miles downwind	40	2,000	--	41,740	4,050	--	38	900	--	36,500	9,200	--
3-5 miles downwind	40	2,000	--	10,950	2,730	--	24	1,300	--	81,100	14,700	--
5-10 miles downwind	40	2,000	--	12,850	3,010	--	23	1,300	--	55,000	13,100	--
10-15 miles downwind	40	2,000	--	10,150	2,890	--	23	1,300	--	36,500	12,900	--
15-20 miles downwind	40	2,000	--	16,900	3,210	--	22	900	--	54,400	9,100	--
N	240	--	--	6	6	--	168	--	--	6	6	--
Min	--	2,000	--	10,150	2,730	--	--	900	--	36,500	9,100	--
Max	--	2,000	--	41,740	4,050	--	--	1,300	--	81,100	14,700	--
Median	--	2,000	--	14,700	3,110	--	--	1,300	--	46,150	12,400	--
Mean	--	2,000	--	18,190	3,263	--	--	1,167	--	50,233	11,817	--
StdDev	--	--	--	11,870	508	--	--	--	--	17,448	2,252	--
		Effluent intake concentration (c)						Effluent intake concentration (c)				
Reference	Anderson, Sheehan, and Meyer 1968b, 1969a											

Location	<sup>210</sup> Po offsite concentration (10 <sup>-18</sup> μCi/ml) <sup>b</sup>					
	Samples	LDL	Min	Max	Mean	Mean
0-3 miles upwind	40	8,000	--	440,200	32,900	--
0-3 miles downwind	40	5,300	--	404,200	35,100	--
3-5 miles downwind	40	8,000	--	396,600	34,900	--
5-10 miles downwind	40	8,000	--	331,500	31,300	--
10-15 miles downwind	40	8,000	--	312,700	33,700	--
15-20 miles downwind	40	5,300	--	236,800	23,100	--
N	240	--	--	6	6	--
Min	--	5,300	--	236,800	23,100	--
Max	--	8,000	--	440,200	35,100	--
Median	--	8,000	--	364,050	33,300	--
Mean	--	7,100	--	353,667	31,833	--
StdDev	--	--	--	74,448	4,500	--
		Effluent intake concentration (c)				
Source	Anderson, Sheehan, and Meyer 1969a, Table 5					

- LDL = lower detection limit unknown confidence level; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.
- Gross alpha attributed to Pu-238 after separation of Po (naturally occurring alpha is included).
- Not used (derived by alternate method).



**ATTACHMENT C**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1959 TO 1972**

Page 7 of 9

Table C-11. Mound offsite air-monitoring data for 1969.<sup>a</sup>

Location	HTO offsite concentration ( $10^{-12}$ $\mu\text{Ci/ml}$ )						<sup>238</sup> Pu offsite concentration ( $10^{-18}$ $\mu\text{Ci/ml}$ ) <sup>b</sup>							
	Samples	LDL	Min	Max	Mean	Mean	Samples	LDL	Min	Max	Mean	Mean		
0-3 miles upwind	35	1,000	--	5,480	1,390	--	37	1,300	--	12,700	5,400	--		
0-3 miles downwind	35	1,000	--	12,190	1,400	--	38	900	--	61,100	6,800	--		
3-5 miles downwind	34	1,000	--	3,990	1,120	--	38	1,300	--	183,300	10,500	--		
5-10 miles downwind	34	1,000	--	2,390	1,060	--	37	1,300	--	16,000	6,300	--		
10-15 miles downwind	34	1,000	--	1,510	1,020	--	38	1,300	--	19,700	5,900	--		
15-20 miles downwind	33	1,000	--	3,580	1,110	--	37	900	--	15,600	4,200	--		
N	205	--	--	6	6	--	225	--	--	6	6	--		
Min	--	1,000	--	1,510	1,020	--	--	900	--	12,700	4,200	--		
Max	--	1,000	--	12,190	1,400	--	--	1,300	--	183,300	10,500	--		
Median	--	1,000	--	3,785	1,115	--	--	1,300	--	17,850	6,100	--		
Mean	--	1,000	--	4,857	1,183	--	--	1,167	--	51,400	6,517	--		
StdDev	--	--	--	3,843	168	--	--	--	--	67,125	2,144	--		
		Effluent intake concentration					(c)		Effluent intake concentration					(c)
Reference	Anderson, Sheehan, and Meyer 1969b; Anderson and Sheehan 1970													

Location	<sup>210</sup> Po offsite concentration ( $10^{-18}$ $\mu\text{Ci/ml}$ ) <sup>b</sup>						
	Samples	LDL	Min	Max	Mean	Mean	
0-3 miles upwind	37	8,000	--	39,500	15,600	--	
0-3 miles downwind	38	5,300	--	35,800	9,400	--	
3-5 miles downwind	37	8,000	--	38,900	14,500	--	
5-10 miles downwind	38	8,000	--	64,900	15,600	--	
10-15 miles downwind	39	8,000	--	30,300	14,400	--	
15-20 miles downwind	37	5,300	--	35,700	10,400	--	
N	226	--	--	6	6	--	
Min	--	5,300	--	30,300	9,400	--	
Max	--	8,000	--	64,900	15,600	--	
Median	--	8,000	--	37,350	14,450	--	
Mean	--	7,100	--	40,850	13,317	--	
StdDev	--	--	--	12,226	2,715	--	
		Effluent intake concentration					(c)
Source	Anderson and Sheehan 1970, Table 5						

- a. LDL = lower detection limit unknown confidence level; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.  
b. Gross alpha attributed to Pu-238 after separation of Po (naturally occurring alpha is included).  
c. Not used (derived by alternate method).

## ATTACHMENT C MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1959 TO 1972

Page 8 of 9

Table C-12. Mound offsite air-monitoring data for 1970.<sup>a</sup>

Location	HTO offsite concentration (10 <sup>-12</sup> μCi/ml)						<sup>238</sup> Pu offsite concentration (10 <sup>-18</sup> μCi/ml)						<sup>210</sup> Po offsite concentration (10 <sup>-18</sup> μCi/ml)					
	Samples	LDL	Min	Max	Mean	Mean	Samples	LDL	Min	Max	Mean	Mean	Samples	LDL	Min	Max	Mean	Mean
0-miles upwind	82	200	--	--	480	--	81	1,300	--	--	3,300	--	84	8,000	--	--	14,000	--
0-3 3 miles downwind	83	200	--	--	3,910	--	81	900	--	--	2,900	--	84	5,000	--	--	8,000	--
3-5 miles downwind	83	200	--	--	610	--	81	1,300	--	--	3,300	--	83	8,000	--	--	10,000	--
5-10 miles downwind	84	200	--	--	420	--	81	1,300	--	--	2,700	--	84	8,000	--	--	11,000	--
10-15 miles downwind	84	200	--	--	520	--	81	1,300	--	--	2,700	--	84	8,000	--	--	12,000	--
15-20 miles downwind	84	200	--	--	430	--	81	900	--	--	2,300	--	84	5,000	--	--	8,000	--
N	500	--	--	--	6	--	486	--	--	6	--	--	503	--	--	--	6	--
Min	--	200	--	--	420	--	--	900	--	--	2,300	--	--	5,000	--	--	8,000	--
Max	--	200	--	--	3,910	--	--	1,300	--	--	3,300	--	--	8,000	--	--	14,000	--
Median	--	200	--	--	500	--	--	1,300	--	--	2,800	--	--	8,000	--	--	10,500	--
Mean	--	200	--	--	1,062	--	--	1,167	--	--	2,867	--	--	7,000	--	--	10,500	--
StdDev	--	--	--	--	1,397	--	--	--	--	388	--	--	--	--	--	--	2,345	--
	Effluent intake concentration					(b)	Effluent intake concentration					(b)	Effluent intake concentration					(b)
Reference	Monsanto 1971 a,b																	

a. LDL = lower detection limit at 95% confidence level; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.

b. Not used (derived by alternate method).

Table C-13. Mound air-monitoring data for 1971.<sup>a</sup>

Location	HTO concentration (10 <sup>-12</sup> μCi/ml)					<sup>238</sup> Pu concentration (10 <sup>-18</sup> μCi/ml)					<sup>210</sup> Po Concentration (10 <sup>-18</sup> μCi ml <sup>-1</sup> )							
	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean			
0-3 miles upwind	136	40	--	--	610	116	30	--	--	2,270	134	2,000	--	--	12,000			
0-3 miles downwind	136	40	--	--	2,880	116	30	--	--	2,960	134	2,000	--	--	1,000			
3-5 miles downwind	136	40	--	--	760	115	30	--	--	1,540	134	2,000	--	--	10,000			
5-10 miles downwind	136	40	--	--	410	110	30	--	--	1,630	134	2,000	--	--	14,000			
Southern Perimeter	--	--	--	--	140	--	--	--	--	500	--	--	--	--	2,000			
Northern Perimeter	--	--	--	--	4,800	--	--	--	--	300	--	--	--	--	2,000			
Site center	--	--	--	--	5,400	--	--	--	--	400	--	--	--	--	4,000			
N	816	--	--	--	--	677	--	--	--	--	804	--	--	--	--			
Min	--	40	--	--	--	--	30	--	--	--	--	2,000	--	--	--			
Max	--	40	--	--	--	--	30	--	--	--	--	2,000	--	--	--			
Median	--	40	--	--	--	--	30	--	--	--	--	2,000	--	--	--			
Mean	--	40	--	--	--	--	30	--	--	--	--	2,000	--	--	--			
StdDev	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--			
	Effluent intake concentration					4,800	Effluent intake concentration					400	Effluent intake concentration					2,000
Reference	Monsanto 1972; Carfagno and Westendorf 1972a																	

a. LDL = lower detection limit at 95% confidence level; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.

**ATTACHMENT C**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1959 TO 1972**  
 Page 9 of 9

Table C-14. Mound air-monitoring data for 1972.<sup>a</sup>

Location	HTO concentration (10 <sup>-12</sup> μCi/ml)					<sup>238</sup> Pu concentration (10 <sup>-18</sup> μCi/ml)					<sup>210</sup> Po concentration (10 <sup>-18</sup> μCi/ml)												
	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean								
211 On	26	3	<3.0	290	77	26	1	10	928	400	26	20	930	3,700	2,300								
212 On	26	3	<3.0	2,200	200	26	1	10	129	58	26	20	700	2,400	1,300								
213 On	26	3	<3.0	1,250	110	26	1	8	1,101	400	26	20	660	2,600	1,200								
214 On	26	3	<3.0	690	82	26	1	39	153	140	26	20	740	4,500	1,300								
215 On	26	3	<3.0	430	51	26	1	18	33	22	26	20	590	2,300	1,200								
N	130	5	0	5	5	130	5	5	5	5	130	5	5	5	5								
Min	--	3	BEL	290	51	--	1	8	33	22	--	20	590	2,300	1,200								
Max	--	3	BEL	2,200	200	--	1	39	1,101	400	--	20	930	4,500	2,300								
Median	--	3.00	ND	690.00	82.00	--	0.50	10.00	153.00	140.00	--	20.00	700.00	2,600.00	1,300.00								
Mean	--	3.00	ND	972.00	104.00	--	0.50	17.00	468.80	204.00	--	20.00	724.00	3,100.00	1,460.00								
StdDev	--	0.00	ND	778.41	57.61	--	0.00	12.88	503.90	183.96	--	0.00	127.79	961.77	472.23								
101 Off	46	3	<3.0	580	101	46	1	11	95	34	46	20	520	3,700	1,300								
102 Off	37	3	<3.0	250	61	3	1	(b)	(b)	69	--	--	--	--	--								
103 Off	45	3	<3.0	1,640	81	44	1	5	188	56	--	--	--	--	--								
104 Off	42	3	<3.0	270	30	45	1	6	51	20	--	--	--	--	--								
105 Off	45	3	<3.0	110	12	45	1	4	27	10	--	--	--	--	--								
106 Off	45	3	<3.0	59	8	45	1	3	78	13	--	--	--	--	--								
107 Off	43	3	<3.0	25	4	25	1	2	11	5	--	--	--	--	--								
108 Off	44	3	<3.0	16	3	43	1	3	14	8	42	20	600	2,900	1,300								
109 Off	45	3	<3.0	21	4	41	1	2	9	5	--	--	--	--	--								
110 Off	43	3	<3.0	79	5	27	1	4	7	5	--	--	--	--	--								
N	435	10	0	10	10	364	10	9	9	10	88	2	2	2	2								
Min	--	3	BEL	16	3	--	1	2	7	5	--	20	520	2,900	1,300								
Max	--	3	BEL	1,640	101	--	1	11	188	69	--	20	600	3,700	1,300								
Median	--	3.00	--	95	10	--	0.50	3.50	27.00	11.30	--	20.00	560.00	3,300.00	1,300.00								
Mean	--	3.00	--	305	31	--	0.50	4.36	53.38	22.43	--	20.00	560.00	3,300.00	1,300.00								
StdDev	--	0.00	--	500	37	--	0.00	2.73	59.78	23.14	--	0.00	56.57	565.69	0.00								
EL					--					--					--								
Reference	Carfagno and Westendorf 1972b, 1973a					Effluent intake concentration					82.00	Effluent intake concentration					140.00	Effluent intake concentration					1,300.00

a. -- = no data; BEL = below environmental level; BRB = below reagent blank; EL = environmental (activity concentration) level; LDL = lower detection limit at 95% confidence level; ; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.  
 b. Pu-238 sample location 102 value is composite of three samples.

**ATTACHMENT D**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001**  
Page 1 of 38

**LIST OF TABLES**

<u>TABLE</u>	<u>TITLE</u>	<u>PAGE</u>
D-1	Mound air-monitoring data for 1973 .....	69
D-2	Mound air-monitoring data for 1974 .....	70
D-3	Mound air-monitoring data for 1975 .....	71
D-4	Mound air-monitoring data for 1976 .....	72
D-5	Mound air-monitoring data for 1977 .....	73
D-6	Mound air-monitoring data for 1978 .....	74
D-7	Mound air-monitoring data for 1979 .....	75
D-8	Mound air-monitoring data for 1980 .....	76
D-9	Mound air-monitoring data for 1981 .....	77
D-10	Mound air-monitoring data for 1982 .....	78
D-11	Mound air-monitoring data for 1983 .....	79
D-12	Mound air-monitoring data for 1984 .....	80
D-13	Mound air-monitoring data for 1985 .....	81
D-14	Mound air-monitoring data for 1986 .....	82
D-15	Mound air-monitoring data for 1987 .....	83
D-16	Mound air-monitoring data for 1988 .....	84
D-17	Mound air-monitoring data for 1989 .....	85
D-18	Mound air-monitoring data for 1990 .....	86
D-19	Mound air-monitoring data for 1991 .....	87
D-20	Mound air-monitoring data for 1992 .....	88
D-21	Mound air-monitoring data for 1993 .....	89
D-22	Mound air-monitoring data for 1994 .....	90
D-23	Mound air-monitoring data for 1995 .....	91
D-24	Mound air-monitoring data for 1996 .....	92
D-25	Mound air-monitoring data for 1997 .....	94
D-26	Mound air-monitoring data for 1998 .....	96
D-27	Mound air-monitoring data for 1999 .....	98
D-28	Mound air-monitoring data for 2000 .....	100
D-29	Mound air-monitoring data for 2001 .....	102
D-30	Mound air-monitoring data for 2002 .....	102

**ATTACHMENT D  
MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001**

Page 2 of 38

Table D-1. Mound air-monitoring data for 1973.<sup>a</sup>

HTO concentration (10 <sup>-12</sup> µCi/ml)						<sup>238</sup> Pu concentration (10 <sup>-18</sup> µCi/ml)					<sup>210</sup> Po concentration (10 <sup>-18</sup> µCi/ml)							
Location	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean			
211 On	52	3	<3.0	280.00	59.00	51	0.5	180.00	2850.00	940.00	51	20	590	6,500	1,500			
212 On	52	3	<3.0	880.00	81.00	51	0.5	47.00	600.00	160.00	51	20	480	2,000	1,100			
213 On	52	3	<3.0	670	97.00	51	0.5	130	9000	1390	52	20	500	5,500	1,100			
214 On	50	3	<3.0	570	79	48	0.5	59	180	110	49	20	260	3,300	1,000			
215 On	51	3	<3.0	340.00	33.00	50	0.5	18.00	350.00	68.00	51	20	500	1,900	1,000			
N	257	5	0	5	5	251	5	5	5	5	254	5	5	5	5			
Min		3	BEL	280.00	33.00		0.5	18.00	180.00	68.00		20.0	260	1,900	1,000			
Max		3	BEL	880.00	97.00		0.5	180.00	9000.00	1390.00		20.0	260	1,900	1,500			
Median		3	--	570.00	79.00		0.5	59.00	600.00	160.00		20.0	500	3,300	1,100			
Mean		3	--	548.00	69.80		0.5	86.80	2596.00	533.60		20.0	466	3,840	1,140			
StdDev		0	--	245.30	24.60		0.0	66.41	3739.70	598.83		0.0	123	2,078	207			
101 Off	49	3	<3.0	810.00	87.00	50	0.36	11.00	157.00	47.00	50	20	370	2,400	1,100			
102 Off	51	3	<3.0	970.00	124.00	43	0.36	9.90	146.00	56.00	--	--	--	--	--			
103 Off	52	3	<3.0	3040.00	115.00	52	0.36	4.60	184.00	58.00	--	--	--	--	--			
104 Off	51	3	<3.0	570.00	40.00	51	0.36	4.00	444.00	51.00	--	--	--	--	--			
105 Off	52	3	<3.0	350.00	14.00	51	0.36	0.60	55.00	16.00	--	--	--	--	--			
106 Off	51	3	<3.0	130.00	12.00	40	0.36	0.50	21.00	7.80	--	--	--	--	--			
107 Off	52	3	<3.0	200.00	15.00	45	0.36	<0.36	61.00	8.80	--	--	--	--	--			
108 Off	52	3	<3.0	110.00	8.00	52	0.36	2.60	143.00	25.00	52	20	450	2,200	1,300			
109 Off	52	3	<3.0	660.00	26.00	49	0.36	0.60	594.00	52.00	--	--	--	--	--			
110 Off	52	3	<3.0	80.00	8.00	38	0.36	<0.36	19.00	4.60	--	--	--	--	--			
111 Off	52	3	<3.0	80.00	9.00	52	0.36	<0.36	26.00	4.00	--	--	--	--	--			
112 Off	50	3	<3.0	490.00	37.00	50	0.36	0.70	60.00	16.00	--	--	--	--	--			
113 Off	51	3	<3.0	130.00	13.00	46	0.36	<0.36	11.00	4.20	--	--	--	--	--			
114 Off	51	3	<3.0	110.00	10.00	51	0.36	<0.36	12.00	2.50	--	--	--	--	--			
115 Off	50	3	<3.0	80.00	10.00	49	0.36	<0.36	12.00	3.10	--	--	--	--	--			
116 Off	49	3	<3.0	210.00	14.00	48	0.36	<0.36	18.00	3.90	--	--	--	--	--			
117 Off	50	3	<3.0	100.00	9.00	50	0.36	<0.36	10.00	1.90	--	--	--	--	--			
118 Off	45	3	<3.0	910.00	45.00	30	0.36	2.80	26.00	9.10	--	--	--	--	--			
119 Off	41	3	<3.0	60.00	5.00	41	0.36	<0.36	20.00	3.90	--	--	--	--	--			
120 Off	42	3	<3.0	100.00	9.00	42	0.36	<0.36	12.00	3.00	--	--	--	--	--			
121 Off	44	3	<3.0	50.00	7.00	42	0.36	<0.36	10.00	2.60	--	--	--	--	--			
N	1,039	21	0	21	21	972	21	10	21	21	102	2	2	2	2			
Min		3	BEL	50.00	5.00		0.36	0.5	10.00	1.90		20	370	2,200	1,100			
Max		3	BEL	3,040.00	124.00		0.36	11	594.00	58.00		20	450	2,400	1,300			
Median		3	--	130.00	13.00		0.36	2.70	26.00	7.80		20	410	2,300	1,200			
Mean		3	--	440.00	29.38		0.36	3.73	97.19	18.11		20	410	2,300	1,200			
StdDev		0	--	667.52	35.56		0.00	3.85	152.62	20.74		0	57	141	141			
BEL <sup>b</sup>					5					3.9					--			
Reference	Carfagno and Westendorf 1973b, 1974																	
	Effluent intake concentration					74.00	Effluent intake concentration					156.10	Effluent intake concentration					1,100.00

a. -- = no data; BEL = below environmental level; BRB = below reagent blank; EL = environmental (activity concentration) level; LDL = lower detection limit at 95% confidence level; ; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.  
 b. BEL values from sample location 119.

**ATTACHMENT D**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001**  
 Page 3 of 38

Table D-2. Mound air-monitoring data for 1974.<sup>a,b</sup>

Location	<sup>238</sup> Pu concentration (10 <sup>-12</sup> μCi/ml)					<sup>238</sup> Pu concentration (10 <sup>-18</sup> μCi/ml)					<sup>210</sup> Po concentration (10 <sup>-18</sup> μCi/ml)							
	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean			
211 On	53	3	<3.0	550.00	86.00	52	0.4	51.00	3920.00	810.00	52	20	310.00	2800.00	1100.00			
212 On	50	3	<3.0	1220.00	110.00	50	0.4	60.00	530.00	190.00	50	20	420.00	2200.00	1200.00			
213 On	53	3	20.00	3330	320.00	53	0.4	200	1900	570	53	20	600.00	2500.00	1100.00			
214 On	53	3	<3.0	1440	170	53	0.4	67	460	170	53	20	630.00	2500.00	1100.00			
215 On	53	3	<3.0	1750.00	160.00	52	0.4	23.00	190.00	82.00	52	20	460.00	2400.00	1100.00			
N	262	5	1	5	5	260	5	5	5	5	260	5	5	5	5			
Min		3	20.00	550.00	86.00		0.4	23.00	190.00	82.00		20.0	310.0	2200.0	1100.0			
Max		3	20.00	3330.00	320.00		0.4	200.00	3920.00	810.00		20.0	310.0	2200.0	1200.0			
Median		3	--	1440.00	160.00		0.4	60.00	530.00	190.00		20.0	460.00	2500.00	1100.00			
Mean		3	--	1658.00	169.20		0.4	80.20	1400.00	364.40		20.0	484.00	2480.00	1120.00			
StdDev		0	--	1033.33	91.18		0.0	69.03	1557.64	311.76		0.0	132.02	216.79	44.72			
101 Off	53	2	<2.0	900.00	110.00	52	0.36	23.00	316.00	100.00	52	20	590.00	3000.00	1200.00			
102 Off	53	2	<2.0	1700.00	140.00	53	0.36	9.60	293.00	60.00	--	--	--	--	--			
103 Off	53	2	<2.0	2490.00	148.00	53	0.36	18.00	335.00	64.00	--	--	--	--	--			
104 Off	53	2	<2.0	520.00	49.00	53	0.36	3.80	34.00	13.00	--	--	--	--	--			
105 Off	53	2	<2.0	510.00	54.00	35	0.36	3.30	36.00	12.00	--	--	--	--	--			
106 Off	53	2	<2.0	230.00	29.00	22	0.36	2.10	21.00	6.30	--	--	--	--	--			
107 Off	52	2	<2.0	260.00	21.00	30	0.36	0.60	37.00	6.00	--	--	--	--	--			
108 Off	52	2	<2.0	140.00	16.00	47	0.36	0.60	84.00	32.00	47	20	430.00	2400.00	1300.00			
109 Off	53	2	<2.0	130.00	15.00	53	0.36	1.20	16.00	5.60	--	--	--	--	--			
110 Off	52	2	<2.0	90.00	17.00	18b	0.36	1.90	43.00	13.00	--	--	--	--	--			
111 Off	52	2	<2.0	60.00	11.00	53	0.36	0.90	32.00	7.80	--	--	--	--	--			
112 Off	53	2	<2.0	530.00	40.00	53	0.36	2.80	79.00	20.00	--	--	--	--	--			
113 Off	53	2	<2.0	50.00	9.00	53	0.36	0.80	23.00	5.60	--	--	--	--	--			
114 Off	53	2	<2.0	60.00	8.00	53	0.36	1.70	15.00	6.30	--	--	--	--	--			
115 Off	53	2	<2.0	160.00	12.00	50	0.36	0.30	71.00	10.00	--	--	--	--	--			
116 Off	53	2	<2.0	100.00	10.00	47	0.36	0.70	35.00	5.60	--	--	--	--	--			
117 Off	53	2	<2.0	40.00	7.00	48	0.36	0.70	32.00	7.30	--	--	--	--	--			
118 Off	53	2	<2.0	1800.00	87.00	53	0.36	4.00	32.00	14.00	--	--	--	--	--			
119 Off	52	2	<2.0	40.00	7.00	48	0.36	1.10	5.40	1.90	--	--	--	--	--			
120 Off	53	2	<2.0	30.00	6.00	53	0.36	1.60	19.00	4.30	--	--	--	--	--			
121 Off	53	2	<2.0	30.00	8.00	53	0.36	0.50	28.00	5.50	--	--	--	--	--			
N	1108	21	0	21	21	980	21	21	21	21	99	2	2	2	2			
Min		2	BEL	30.00	6.00		0.36	0.3	5.40	1.90		20	430	2400	1200			
Max		2	BEL	2490.00	148.00		0.36	23	335.00	100.00		20	590	3000	1300			
Median		2	--	140.00	16.00		0.36	1.60	34.00	7.80		20	510	2700.00	1250.00			
Mean		2	--	470.00	38.29		0.36	3.77	75.54	19.06		20	510	2700.00	1250.00			
StdDev		0	--	690.22	44.76		0.00	5.98	102.23	25.15		0	113.14	424.26	70.71			
EL <sup>c</sup>					7				1.9						--			
Reference	Carfagno and Robinson 1975																	
	Effluent intake concentration					153.00	Effluent intake concentration					188.10	Effluent intake concentration					1,100.00

- a. -- = no data; BEL = below environmental level; BRB = below reagent blank; EL = environmental (activity concentration) level; LDL = lower detection limit at 95% confidence level; ; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.
- b. Pu-239 samples from location 110 were collected only during the fall season, concentrations are typically lower; Min values less than LDL included as reported; however, these values should be interpreted as "BEL"; tritium 'Mean' concentrations "Onsite" and "Offsite" included LDL values for averaging purposes.
- c. EL values from sample location 119.

**ATTACHMENT D**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001**  
 Page 4 of 38

Table D-3. Mound air-monitoring data for 1975.<sup>a,b</sup>

Location	HTO concentration (10 <sup>-12</sup> μCi/ml)					<sup>238</sup> Pu concentration (10 <sup>-18</sup> μCi/ml)					<sup>239</sup> Pu concentration (10 <sup>-18</sup> μCi/ml)							
	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean			
211 On	52	12.2	<12.2	100.00	31.00	52	0.9	68.00	729.00	212.00	52	0.52	--	--	22.00			
212 On	50	12.2	<12.2	90.00	33.00	49	0.9	23.00	142.00	52.00	49	0.52	--	--	21.00			
213 On	52	12.2	<12.2	117	31.00	52	0.9	87	10959	1033	52	0.52	--	--	41			
214 On	52	12.2	<12.2	290	34	44	0.9	13	173	67	44	0.52	--	--	25			
215 On	51	12.2	<12.2	83.00	20.00	51	0.9	17.00	91.00	38.00	51	0.52	--	--	22.00			
N	257	5	0	5	5	248	5	5	5	5	248	5	0	0	5			
Min		12.2	BEL	83.00	20.00		0.9	13.00	91.00	38.00		0.5	BEL	BEL	21.00			
Max		12.2	BEL	290.00	34.00		0.9	87.00	10959.00	1033.00		0.5	BEL	BEL	41.00			
Median		12.2	--	100.00	31.00		0.9	23.00	173.00	67.00		0.5	--	--	22.00			
Mean		12.2	--	136.00	29.80		0.9	41.60	2418.80	280.40		0.5	--	--	26.20			
StdDev		0	--	87.03	5.63		0.0	33.64	4781.12	426.48		0.0	--	--	8.41			
101 Off	52	7.2	<7.2	42.00	13.00	52	0.79	3.70	56.00	23.00	52	0.46	--	--	29.00			
102 Off	52	7.2	<7.2	49.00	16.00	52	0.79	5.80	30.00	14.00	52	0.46	--	--	29.00			
103 Off	52	7.2	<7.2	52.00	14.00	52	0.79	4.50	31.00	13.00	52	0.46	--	--	23.00			
104 Off	52	7.2	<7.2	27.00	9.00	52	0.79	2.30	94.00	14.00	52	0.46	--	--	22.00			
105 Off	52	7.2	<7.2	68.00	11.00	41	0.79	0.80	54.00	9.40	41	0.46	--	--	19.00			
106 Off	27	7.2	<7.2	11.00	7.30	13	0.79	2.70	3.50	3.20	13	0.46	--	--	38.00			
107 Off	27	7.2	<7.2	14.00	7.90	25	0.79	1.60	16.00	6.20	25	0.46	--	--	36.00			
108 Off	52	7.2	<7.2	21.00	7.80	52	0.79	1.10	16.00	7.50	52	0.46	--	--	19.00			
109 Off	27	7.2	<7.2	18.00	8.00	25	0.79	0.80	8.60	3.30	25	0.46	--	--	37.00			
110 Off	52	7.2	<7.2	16.00	7.40	52	0.79	<.79	4.70	2.30	52	0.46	--	--	19.00			
111 Off	52	7.2	<7.2	13.00	7.40	52	0.79	<.79	5.30	3.30	52	0.46	--	--	22.00			
112 Off	52	7.2	<7.2	46.00	10.00	52	0.79	1.20	4.90	3.50	52	0.46	--	--	31.00			
113 Off	27	7.2	<7.2	13.00	7.60	25	0.79	1.40	1.80	1.60	25	0.46	--	--	40.00			
114 Off	23	7.2	<7.2	14.00	7.70	22	0.79	1.50	2.10	1.80	22	0.46	--	--	40.00			
115 Off	52	7.2	<7.2	17.00	7.50	52	0.79	<.79	3.80	1.70	52	0.46	--	--	26.00			
116 Off	27	7.2	<7.2	12.00	7.40	25	0.79	1.00	1.30	1.20	25	0.46	--	--	35.00			
117 Off	23	7.2	<7.2	13.00	7.70	21	0.79	1.50	7.40	4.80	21	0.46	--	--	34.00			
118 Off	52	7.2	<7.2	18.00	8.90	52	0.79	1.40	7.60	4.40	52	0.46	--	--	18.00			
119 Off	51	7.2	<7.2	13.00	7.40	50	0.79	<.79	2.00	1.40	50	0.46	--	--	19.00			
120 Off	27	7.2	<7.2	8.70	7.20	25	0.79	1.70	1.80	1.80	25	0.46	--	--	35.00			
121 Off	27	7.2	<7.2	10.00	7.30	25	0.79	1.40	1.80	1.60	25	0.46	--	--	37.00			
122 Off	--	--	--	--	--	44	0.79	6.40	74.00	17.00	44	0.46	--	--	16.00			
N	858	21	0	21	21	861	22	18	22	22	861	22	0	0	22			
Min		7.2	BEL	8.70	7.20		0.79	0.8	1.30	1.20		0.46	BEL	BEL	16.00			
Max		7.2	BEL	68.00	16.00		0.79	6.4	94.00	23.00		0.46	BEL	BEL	40.00			
Median		7.2	--	16.00	7.70		0.79	1.50	6.35	3.40		0.46	--	--	29.00			
Mean		7.2	--	23.60	8.93		0.79	2.27	19.44	6.36		0.46	--	--	28.36			
StdDev		0	--	17.00	2.50		0.00	1.70	26.49	6.10		0	--	--	8.24			
EL <sup>c</sup>					2					3					19			
Reference	Farmer, Robinson, and Carfagno 1976																	
	Effluent intake concentration					29.00	Effluent intake concentration					64.00	Effluent intake concentration					3.00

- a. -- = no data; BEL = below environmental level; BRB = below reagent blank; EL = environmental (activity concentration) level; LDL = lower detection limit at 95% confidence level; ; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.
- b. Min values less than LDL included as reported; however, these values should be interpreted as "BEL"; tritium 'Mean' concentrations "Onsite" and "Offsite" included LDL values for averaging purposes; Pu-238 'Mean' concentrations "Offsite" included LDL values for averaging purposes.
- c. EL values from sample location 119.

**ATTACHMENT D**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001**  
 Page 5 of 38

Table D-4. Mound air-monitoring data for 1976.<sup>a,b</sup>

Location	HTO concentration (10 <sup>-12</sup> µCi/ml) <sup>c</sup>						<sup>238</sup> Pu concentration (10 <sup>-18</sup> µCi/ml) <sup>d</sup>						<sup>239</sup> Pu concentration (10 <sup>-18</sup> µCi/ml) <sup>e</sup>					
	Samples	LDL	Min	Max	Mean		Samples	LDL	Min	Max	Mean		Samples	LDL	Min	Max	Mean	
211 On	49	7.4	<7.4	86.00	18.00		52	0.8	2.60	373.00	87.00		52	0.45	--	--	5.90	
212 On	48	7.4	<7.4	52.00	20.00		52	0.8	14.00	110.00	35.00		52	0.45	--	--	5.40	
213 On	51	7.4	<7.4	200	28.00		52	0.8	72	776	267		52	0.45	--	--	13	
214 On	50	7.4	<7.4	102	22		47	0.8	17	379	91		47	0.45	--	--	8.1	
215 On	50	7.4	<7.4	339.00	24.00		50	0.8	7.50	68.00	33.00		50	0.45	--	--	6.00	
N	248	5	0	5	5		253	5	5	5	5		253	5	0	0	5	
Min		7.4	BEL	52.00	18.00			0.8	2.60	68.00	33.00			0.5	BEL	BEL	5.40	
Max		7.4	BEL	339.00	28.00			0.8	72.00	776.00	267.00			0.5	BEL	BEL	13.00	
Median		7.4	--	102.00	22.00			0.8	14.00	373.00	87.00			0.5	--	--	6.00	
Mean		7.4	--	155.80	22.40			0.8	22.62	341.20	102.60			0.5	--	--	7.68	
StdDev		0	--	116.25	3.85			0.0	28.17	282.66	95.94			0.0	--	--	3.15	
101 Off	51	4.5	<4.5	136.00	13.00		52	0.77	2.60	144.00	39.00		52	0.43	--	--	6.70	
102 Off	51	4.5	<4.5	192.00	15.00		52	0.77	7.60	74.00	26.00		52	0.43	--	--	5.20	
103 Off	51	4.5	<4.5	75.00	11.00		52	0.77	5.90	75.00	29.00		52	0.43	--	--	8.50	
104 Off	49	4.5	<4.5	38.00	9.40		52	0.77	<0.77	19.00	7.90		52	0.43	--	--	5.20	
105 Off	51	4.5	<4.5	53.00	8.90		52	0.77	<0.77	4.70	2.10		52	0.43	--	--	4.80	
108 Off	50	4.5	<4.5	41.00	8.90		44	0.77	0.80	7.10	3.90		44	0.43	--	--	4.40	
110 Off	51	4.5	<4.5	54.00	9.00		52	0.77	<0.77	4.20	1.70		52	0.43	--	--	4.60	
111 Off	51	4.5	<4.5	18.00	8.10		52	0.77	1.60	10.00	4.10		52	0.43	--	--	5.90	
112 Off	51	4.5	<4.5	31.00	9.20		51	0.77	1.20	4.30	2.60		51	0.43	--	--	5.10	
115 Off	51	4.5	<4.5	35.00	8.50		52	0.77	0.40	14.00	2.10		52	0.43	--	--	5.50	
118 Off	50	4.5	<4.5	19.00	9.00		51	0.77	3.50	17.00	6.50		51	0.43	--	--	5.60	
119 Off	51	4.5	<4.5	35.00	8.80		52	0.27	<0.27	0.60	0.50		52	0.43	--	--	3.80	
122 Off	--	--	--	--	--		51	0.77	5.50	107.00	38.00		51	0.43	--	--	6.00	
123 Off	25	4.5	<4.5	31.00	11.00		25	0.77	31.00	294.00	160.00		25	0.43	--	--	5.10	
N	633	13	0	13	13		690	14	10	14	14		690	14	0	0	14	
Min		4.5	BEL	18.00	8.10			0.27	0.4	0.60	0.50			0.43	BEL	BEL	3.80	
Max		4.5	BEL	192.00	15.00			0.77	31	294.00	160.00			0.43	BEL	BEL	8.50	
Median		4.5	--	38.00	9.00			0.77	3.05	15.50	5.30			0.43	--	--	5.20	
Mean		4.5	--	58.31	9.98			0.73	6.01	55.35	23.10			0.43	--	--	5.46	
StdDev		0	--	50.58	2.01			0.13	9.11	82.22	41.85			0	--	--	1.13	
EL <sup>f</sup>		0	--		2						3						3.8	
Reference	Farmer, Robinson, and Carfagno 1977																	
	Effluent intake concentration					20.00	Effluent intake concentration					84.00	Effluent intake concentration					2.20

- a. -- = no data; BEL = below environmental level; BRB = below reagent blank; EL = environmental (activity concentration) level; LDL = lower detection limit at 95% confidence level; ; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.
- b. Min values less than LDL included as reported; however, these values should be interpreted as "BEL"; tritium 'Mean' concentrations "Onsite" and "Offsite" included LDL values for averaging purposes; Pu-238 'Mean' concentrations "Offsite" included LDL values for averaging purposes.
- c. Tritium oxide "Onsite" LDL in air during the first half of the year was 16.5 x 10<sup>-12</sup> µCi/ml and 7.4 x 10<sup>-12</sup> µCi/ml for the second half. Tritium oxide "Offsite" LDL in air during the first half of the year was 9.9 x 10<sup>-12</sup> µCi/ml and 4.5 x 10<sup>-12</sup> µCi/ml for the second half.
- d. Pu-238 "Onsite" LDL in air during the first half of the year was 0.81 x 10<sup>-18</sup> µCi/ml and 0.27 x 10<sup>-18</sup> µCi/ml for the second half. Pu-238 "Offsite" LDL in air during the first half of the year was 0.77 x 10<sup>-18</sup> µCi/ml and .27 E-18 µCi/ml for the second half.
- e. Pu-239 "Onsite" LDL in air during the first half of the year was 0.45 x 10<sup>-18</sup> µCi/ml and 0.15 x 10<sup>-18</sup> µCi/ml for the second half. Pu-239 "Offsite" LDL in air during the first half of the year was 0.43 x 10<sup>-18</sup> µCi/ml and 0.15 x 10<sup>-18</sup> µCi/ml for the second half.
- f. EL values from sample location 119.



**ATTACHMENT D  
MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001**

Page 6 of 38

Table D-5. Mound air-monitoring data for 1977.<sup>a,b</sup>

Location	HTO concentration (10 <sup>-12</sup> µCi/ml)					<sup>238</sup> Pu concentration(10 <sup>-18</sup> µ/ m <sup>3</sup> )					<sup>239</sup> Pu concentration (10 <sup>-18</sup> µCi/ml)							
	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean			
211 On	51	7.3	<7.3	278.00	18.00	43	2.6	24.00	101.00	51.00	43	1.21	--	--	20.00			
212 On	40	7.3	<7.3	143.00	30.00	43	2.6	9.80	117.00	25.00	43	1.21	--	--	19.00			
213 On	35	7.3	<7.3	67	20.00	43	2.6	42	148	81	43	1.21	--	--	31			
214 On	52	7.3	<7.3	68	16	43	2.6	9.8	85	31	43	1.21	--	--	19			
215 On	52	7.3	<7.3	64.00	16.00	43	2.6	3.70	29.00	13.00	43	1.21	--	--	17.00			
N	230	5	0	5	5	215	5	5	5	5	215	5	0	0	5			
Min		7.3	BEL	64.00	16.00		2.6	3.70	29.00	13.00		1.2	BEL	BEL	17.00			
Max		7.3	BEL	278.00	30.00		2.6	42.00	148.00	81.00		1.2	BEL	BEL	31.00			
Median		7.3	--	68.00	18.00		2.6	9.80	101.00	31.00		1.2	--	--	19.00			
Mean		7.3	--	124.00	20.00		2.6	17.86	96.00	40.20		1.2	--	--	21.20			
StdDev		0	--	92.28	5.83		0.0	15.42	44.10	26.63		0.0	--	--	5.59			
101 Off	52	2.9	<2.9	21.60	6.40	51	0.76	1.50	32.00	10.00	51	0.33	--	--	24.00			
102 Off	52	2.9	<2.9	97.30	12.30	52	0.76	5.20	13.00	8.10	52	0.33	--	--	22.00			
103 Off	52	2.9	<2.9	27.70	7.20	51	0.76	4.20	8.80	6.20	51	0.33	--	--	21.00			
104 Off	52	2.9	<2.9	12.70	4.40	52	0.76	2.20	5.00	3.70	52	0.33	--	--	22.00			
105 Off	52	2.9	<2.9	14.50	4.00	52	0.76	<.76	2.30	1.50	52	0.33	--	--	20.00			
108 Off	52	2.9	<2.9	9.40	3.70	48	0.76	<.76	2.90	1.50	48	0.33	--	--	27.00			
110 Off	52	2.9	<2.9	12.20	4.00	51	0.76	<.76	1.50	0.90	51	0.33	--	--	23.00			
111 Off	52	2.9	<2.9	75.30	6.20	52	0.76	<.76	3.20	2.10	52	0.33	--	--	25.00			
112 Off	52	2.9	<2.9	21.00	5.90	48	0.76	<.76	2.10	1.60	48	0.33	--	--	21.00			
115 Off	52	2.9	<2.9	26.60	5.60	51	0.76	<.76	2.10	1.30	51	0.33	--	--	25.00			
118 Off	52	2.9	<2.9	23.70	5.70	51	0.76	2.50	12.00	7.50	51	0.33	--	--	25.00			
119 Off	51	2.9	<2.9	23.30	4.40	51	0.76	<.76	1.10	1.00	51	0.33	--	--	21.00			
122 Off	--	--	--	--	--	47	2.58	6.10	63.00	21.00	47	1.21	--	--	16.00			
123 Off	52	2.9	<2.9	43.60	8.80	52	2.58	5.40	96.00	29.00	52	1.21	--	--	21.00			
124 Off	52	2.9	<2.9	59.80	9.40	52	2.58	3.50	42.00	17.00	52	1.21	--	--	24.00			
N	727	14	0	14	14	761	15	8	15	15	761	15	0	0	15			
Min		2.9	BEL	9.40	3.70		0.76	1.5	1.10	0.90		0.33	BEL	BEL	16.00			
Max		2.9	BEL	97.30	12.30		2.58	6.1	96.00	29.00		1.21	BEL	BEL	27.00			
Median		2.9	--	23.50	5.80		0.76	3.85	5.00	3.70		0.33	--	--	22.00			
Mean		2.9	--	33.48	6.29		1.12	3.83	19.13	7.49		0.506	--	--	22.47			
StdDev		0	--	26.34	2.45		0.75	1.67	27.95	8.53		0.364	--	--	2.70			
EL <sup>c</sup>					2					3					21			
Reference	Farmer, Robinson, and Carfagno 1978																	
	Effluent intake concentration					16.00	Effluent intake concentration					28.00	Effluent intake concentration					0.00

- a. -- = no data; BEL = below environmental level; BRB = below reagent blank; EL = environmental (activity concentration) level; LDL = lower detection limit at 95% confidence level; ; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.
- b. Min values less than LDL included as reported; however, these values should be interpreted as "BEL"; tritium 'Mean' concentrations "Onsite" and "Offsite" included LDL values for averaging purposes; Pu-238 'Mean' concentrations "Offsite" included LDL values for averaging purposes; Pu-239 'Mean' concentration "215 On" included LDL values for averaging purposes.
- c. EL values from sample location 119.

**ATTACHMENT D**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001**  
 Page 7 of 38

Table D-6. Mound air-monitoring data for 1978.<sup>a</sup>

Location	HTO incremental concentration (10 <sup>-12</sup> μCi/ml)					<sup>238</sup> Pu incremental concentration (10 <sup>-18</sup> μCi/ml)					<sup>239,240</sup> Pu concentration (10 <sup>-18</sup> μCi/ml)							
	Sample s	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean			
211 On	52	1.2	EL <sup>b</sup>	36.10	3.40	12	0.8	3.20	33.00	25.00	12	0.4	6	55.00	26.00			
212 On	52	1.2	EL	30.30	6.20	12	0.8	6.40	26.00	13.00	12	0.4	7.2	51.00	27.00			
213 On	52	1.2	EL	41.2	9.00	12	0.8	21	240	110	12	0.4	6.1	56.00	27			
214 On	50	1.2	EL	38	8.7	12	0.8	3.8	96	32	12	0.4	5	52.00	26			
215 On	52	1.2	EL	38.70	4.50	12	0.8	2.00	37.00	11.00	12	0.4	5	47.00	25.00			
N	258	5	0	5	5	60	5	5	5	5	60	5	5	5	5			
Min		1.2	BEL	30.30	3.40		0.8	2.00	26.00	11.00		0.4	5.00	47.00	25.00			
Max		1.2	BEL	41.20	9.00		0.8	21.00	240.00	110.00		0.4	7.20	56.00	27.00			
Median		1.2	--	38.00	6.20		0.8	3.80	37.00	25.00		0.4	6.00	52.00	26.00			
Mean		1.2	--	36.86	6.36		0.8	7.28	86.40	38.20		0.4	5.86	52.20	26.20			
StdDev		0	--	4.10	2.48		0.0	7.84	90.31	41.06		0.0	0.92	3.56	0.84			
101 Off	52	1.2	EL	40.30	4.40	4	0.8	EL	4.90	1.50	4	0.3	8.9	49.00	28.00			
102 Off	52	1.2	EL	56.50	8.60	4	0.8	EL	11.00	5.00	4	0.3	8	60.00	32.00			
103 Off	52	1.2	EL	87.80	5.20	4	0.8	4.40	97.00	29.00	4	0.3	7	45.00	27.00			
104 Off	52	1.2	EL	35.70	3.40	4	0.8	EL	2.50	1.10	4	0.3	7.9	47.00	26.00			
105 Off	52	1.2	EL	28.10	2.00	4	0.8	EL	1.10	EL	4	0.3	6.6	53.00	27.00			
108 Off	52	1.2	EL	44.90	1.70	4	0.8	EL	1.70	EL	4	0.3	11	77.00	39.00			
110 Off	52	1.2	EL	26.80	1.40	4	0.8	EL	0.40	EL	4	0.3	8.1	54.00	29.00			
111 Off	52	1.2	EL	41.70	3.00	4	0.8	EL	4.40	1.00	4	0.3	8.1	72.00	33.00			
112 Off	52	1.2	EL	41.20	2.90	4	0.8	EL	1.10	EL	4	0.3	7.1	55.00	30.00			
115 Off	52	1.2	EL	22.00	0.70	4	0.8	--	--	EL	4	0.3	6.4	50.00	27.00			
118 Off	52	1.2	EL	17.80	1.90	4	0.8	EL	29.00	7.90	4	0.3	8.3	72.00	36.00			
122 Off	27	1.2	EL	28.90	5.60	12	0.8	0.80	21.00	7.80	12	0.4	3.5	44.00	22.00			
123 Off	51	1.2	EL	35.60	7.30	12	0.8	1.30	250.00	28.00	12	0.4	6.8	60.00	30.00			
124 Off	52	1.2	EL	50.40	6.00	12	0.8	1.10	40.00	13.00	12	0.4	5.8	60.00	30.00			
N	702	14	0	14	14	80	14	4	13	9	80	14	14	14	14			
Min		1.2	BEL	17.80	0.70		0.8	0.8	0.40	1.00		0.3	3.5	44.00	22.00			
Max		1.2	BEL	87.80	8.60		0.8	4.4	250.00	29.00		0.4	11	77.00	39.00			
Median		1.2	--	38.00	3.20		0.8	1.20	4.90	7.80		0.3	7.5	54.50	29.50			
Mean		1.2	--	39.84	3.86		0.80	1.90	35.70	10.48		0.321	7.3929	57.00	29.71			
StdDev		0	--	17.51	2.38		0.00	1.68	69.76	10.95		0.043	1.7013	10.50	4.30			
EL <sup>c</sup>					4.5					1.6					22			
Reference	Farmer and Carfagno 1979																	
	Effluent intake concentration					6.20	Effluent intake concentration					25.00	Effluent intake concentration					4.00

a. -- = no data; BEL = below environmental level; BRB = below reagent blank; EL = environmental (activity concentration) level; LDL = lower detection limit at 95% confidence level; ; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.  
 b. EL indicates that 'Min' and 'Mean' values included as reported; however, these values should be interpreted as "BEL".  
 c. EL values from sample location 119.

**ATTACHMENT D**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001**  
Page 8 of 38

Table D-7. Mound air-monitoring data for 1979.<sup>a</sup>

Location	HTO incremental concentration (10 <sup>-12</sup> μCi/ml)					<sup>238</sup> Pu incremental concentration (10 <sup>-18</sup> μCi/ml)					<sup>239,240</sup> Pu concentration (10 <sup>-18</sup> μCi/ml)						
	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean		
211 On	52	0.3	EL	24.80	8.30	12	1.5	5.40	33.00	21.00	12	0.8	2.4	16.00	8.40		
212 On	51	0.3	0.41	26.20	9.50	12	1.5	4.00	37.00	16.00	12	0.8	2.8	12.00	8.30		
213 On	52	0.3	0.12	37.4	13.50	12	1.5	19	880	190	12	0.8	2.5	21.00	11		
214 On	52	0.3	EL	40.9	8.6	12	1.5	5.1	39	13	12	0.8	2.8	14.00	8.1		
215 On	51	0.3	EL	37.10	7.40	12	1.5	2.30	18.00	6.30	12	0.8	1.8	15.00	7.90		
N	258	5	2	5	5	60	5	5	5	5	60	5	5	5	5		
Min		0.3	0.12	24.80	7.40		1.5	2.30	18.00	6.30		0.8	1.80	12.00	7.90		
Max		0.3	0.41	40.90	13.50		1.5	19.00	880.00	190.00		0.8	2.80	21.00	11.00		
Median		0.3	0.27	37.10	8.60		1.5	5.10	37.00	16.00		0.8	2.50	15.00	8.30		
Mean		0.3	0.27	33.28	9.46		1.5	7.16	201.40	49.26		0.8	2.46	15.60	8.74		
StdDev		0	0.21	7.27	2.38		0.0	6.73	379.44	78.86		0.0	0.41	3.36	1.28		
101 Off	52	0.3	EL	28.30	5.30	4	0.5	0.6	7.00	2.90	4	0.4	3.9	17.00	8.70		
102 Off	52	0.3	EL	27.40	10.40	4	0.5	4.60	8.70	6.20	4	0.4	2.8	16.00	8.70		
103 Off	52	0.3	0.40	47.40	6.50	4	0.5	1.30	6.10	3.60	4	0.4	2.9	17.00	8.50		
104 Off	52	0.3	EL	28.20	3.90	4	0.5	0.70	5.60	3.50	4	0.4	3.4	19.00	10.00		
105 Off	52	0.3	EL	16.80	2.80	4	0.5	0.10	1.70	0.90	4	0.4	2.9	19.00	9.10		
108 Off	52	0.3	EL	18.10	1.00	4	0.5	0.20	1.10	0.60	4	0.4	4.2	20.00	11.00		
110 Off	52	0.3	EL	4.20	0.60	4	0.5	EL	1.20	0.50	4	0.4	2.8	19.00	9.50		
111 Off	52	0.3	EL	4.60	0.50	4	0.5	0.08	2.20	1.10	4	0.4	3.4	20.00	9.50		
112 Off	52	0.3	EL	12.80	2.20	4	0.5	0.20	0.70	0.40	4	0.4	2.7	16.00	8.80		
115 Off	52	0.3	EL	7.50	0.30	4	0.5	EL	0.40	0.03	4	0.4	3	18.00	9.20		
118 Off	52	0.3	EL	19.10	2.90	4	0.5	0.70	9.40	3.50	4	0.4	2.8	19.00	9.90		
122 Off	52	0.3	EL	29.70	6.20	12	1.5	1.40	8.80	3.70	12	0.8	2.2	12.00	7.40		
123 Off	52	0.3	EL	41.80	7.60	12	1.5	3.40	110.00	35.00	12	0.8	2.1	21.00	9.60		
124 Off	52	0.3	0.60	60.30	11.00	12	1.5	3.10	29.00	12.00	12	0.8	2.6	20.00	9.80		
N	728	14	2	14	14	80	14	12	14	14	80	14	14	14	14		
Min		0.3	0.4	4.20	0.30		0.5	0.08	0.40	0.03		0.4	2.1	12.00	7.40		
Max		0.3	0.6	60.30	11.00		1.5	4.6	110.00	35.00		0.8	4.2	21.00	11.00		
Median		0.3	0.5	23.25	3.40		0.5	0.70	5.85	3.20		0.4	2.85	19.00	9.35		
Mean		0.3	0.5	24.73	4.37		0.71	1.37	13.71	5.28		0.486	2.9786	18.07	9.26		
StdDev		0	0.1414	16.48	3.58		0.43	1.51	28.66	9.11		0.17	0.582	2.34	0.85		
EL <sup>c</sup>					0.6					0.5					7.8		
Reference	Farmer and Carfagno 1980					Effluent intake concentration					16.00	Effluent intake concentration					0.50
						Effluent intake concentration					8.60	Effluent intake concentration					0.50

a. -- = no data; BEL = below environmental level; BRB = below reagent blank; EL = environmental (activity concentration) level; LDL = lower detection limit at 95% confidence level; ; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.  
b. EL indicates that 'Min' and 'Mean' values included as reported; however, these values should be interpreted as "BEL".  
c. EL values from sample location 119.

**ATTACHMENT D**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001**  
Page 9 of 38

Table D-8. Mound air-monitoring data for 1980.<sup>a</sup>

Location	HTO incremental concentration (10 <sup>-12</sup> µCi/ml)					<sup>238</sup> Pu incremental concentration (10 <sup>-18</sup> µCi/ml)					<sup>239,240</sup> Pu concentration (10 <sup>-18</sup> µCi/ml)						
	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean		
211 On	51	3	EL	101.00	88.80	12	1.6	6.40	160.00	38.00	12	0.3	1.2	12.00	4.30		
212 On	49	3	4.1	5090.00	413.00	12	1.6	3.10	26.00	8.80	12	0.3	1.3	9.30	4.00		
213 On	47	3	2.00	1870	215.00	12	1.6	15	21	58	12	0.3	1.8	12.00	4.9		
214 On	47	3	2.60	685	85.8	12	1.6	2.1	12	6.6	12	0.3	1.3	7.70	3.1		
215 On	46	3	EL	280.00	39.00	12	1.6	0.50	25.00	5.50	12	0.3	1.2	9.10	3.70		
N	240	5	3	5	5	60	5	5	5	5	60	5	5	5	5		
Min		3	2.00	101.00	39.00		1.6	0.50	12.00	5.50		0.3	1.20	7.70	3.10		
Max		3	4.10	5090.00	413.00		1.6	15.00	160.00	58.00		0.3	1.80	12.00	4.90		
Median		3	2.60	685.00	88.80		1.6	3.10	25.00	8.80		0.3	1.30	9.30	4.00		
Mean		3	2.90	1605.20	168.32		1.6	5.42	48.80	23.38		0.3	1.36	10.02	4.00		
StdDev		0	1.08	2066.37	151.58		0.0	5.77	62.41	23.59		0.0	0.25	1.91	0.67		
101 Off	47	3	EL	469.00	49.60	4	0.2	0.7	3.00	2.00	4	0.1	1.9	11.00	5.50		
102 Off	49	3	2.3	1630.00	137.00	4	0.2	2.40	15.00	6.70	4	0.1	3.2	8.40	4.80		
103 Off	49	3	EL	588.00	66.60	4	0.2	3.10	11.00	5.40	4	0.1	2.2	8.60	4.90		
104 Off	49	3	EL	84.40	14.00	4	0.2	1.00	5.20	2.30	4	0.1	2.8	8.10	4.70		
105 Off	49	3	EL	29.10	5.40	4	0.2	EL	1.80	0.60	4	0.1	2.5	8.30	4.90		
108 Off	47	3	EL	132.00	6.00	4	0.2	EL	0.60	0.20	4	0.1	2.5	9.50	5.10		
110 Off	47	3	EL	22.50	1.80	4	0.2	EL	1.90	0.50	4	0.1	2.5	8.30	5.10		
111 Off	49	3	EL	11.50	0.10	4	0.2	0.60	1.40	1.00	4	0.1	2.1	10.00	5.10		
112 Off	50	3	EL	43.80	7.10	4	0.2	EL	1.00	0.40	4	0.1	2.6	7.40	4.20		
115 Off	45	3	EL	7.50	EL	4	0.2	EL	1.80	0.40	4	0.1	2	7.90	4.20		
118 Off	47	3	EL	62.50	8.60	4	0.2	0.50	1.30	0.90	4	0.1	2	9.80	4.80		
122 Off	52	3	EL	667.00	42.10	12	1.6	EL	7.00	2.60	12	0.3	0.9	8.20	0.33		
123 Off	47	3	EL	184.00	45.30	12	1.6	0.60	78.00	14.00	12	0.3	1.9	10.00	4.40		
124 Off	51	3	EL	570.00	76.00	12	1.6	EL	20.00	6.40	12	0.3	1.8	13.00	4.50		
N	678	14	1	14	13	80	14	7	14	14	80	14	14	14	14		
Min		3	2.3	7.50	0.10		0.2	0.5	0.60	0.20		0.1	0.9	7.40	0.33		
Max		3	2.3	1630.00	137.00		1.6	3.1	78.00	14.00		0.3	3.2	13.00	5.50		
Median		3	--	108.20	14.00		0.2	0.70	2.45	1.50		0.1	2.15	8.50	4.80		
Mean		3	--	321.52	35.35		0.50	1.27	10.64	3.10		0.143	2.2071	9.18	4.47		
StdDev		0	--	448.15	40.21		0.60	1.04	20.28	3.88		0.085	0.5484	1.50	1.25		
EL <sup>c</sup>					2					0.2					3.4		
Reference	Farmer and Carfagno 1981					Effluent intake concentration					8.80	Effluent intake concentration					0.60

a. -- = no data; BEL = below environmental level; BRB = below reagent blank; EL = environmental (activity concentration) level; LDL = lower detection limit at 95% confidence level; ; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.  
b. EL indicates that 'Min' and 'Mean' values included as reported; however, these values should be interpreted as "BEL".  
c. EL values from sample location 119.

**ATTACHMENT D**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001**  
 Page 10 of 38

Table D-9. Mound air-monitoring data for 1981.<sup>a</sup>

Location	HTO incremental concentration (10 <sup>-12</sup> μCi/ml)					<sup>238</sup> Pu incremental concentration (10 <sup>-18</sup> μCi/ml)					<sup>239,240</sup> Pu concentration (10 <sup>-18</sup> μCi/ml)							
	Sample s	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean			
211 On	51	7	EL <sup>b</sup>	434.00	71.80	12	1.7	16.60	2040.00	364.00	12	0.3	2.1	47.90	16.60			
212 On	52	7	EL	455.00	67.60	12	1.7	0.70	34.70	10.30	12	0.3	1.2	39.20	12.60			
213 On	49	7	EL	726	78.50	12	1.7	11.6	268	66.1	12	0.3	1.2	36.20	13.6			
214 On	48	7	EL	247	44.5	12	1.7	3.2	88.1	20.7	12	0.3	2.3	36.50	13.8			
215 On	50	7	EL	329.00	30.40	12	1.7	1.60	14.40	6.00	12	0.3	1.2	37.10	14.80			
N	250	5	0	5	5	60	5	5	5	5	60	5	5	5	5			
Min		7	BEL	247.00	30.40		1.7	0.70	14.40	6.00		0.3	1.20	36.20	12.60			
Max		7	BEL	726.00	78.50		1.7	16.60	2040.00	364.00		0.3	2.30	47.90	16.60			
Median		7	--	434.00	67.60		1.7	3.20	88.10	20.70		0.3	1.20	37.10	13.80			
Mean		7	--	438.20	58.56		1.7	6.74	489.04	93.42		0.3	1.60	39.38	14.28			
StdDev		0	--	181.39	20.28		0.0	7.00	872.75	153.13		0.0	0.55	4.90	1.51			
101 Off	50	7	EL	369.00	70.20	4	0.3	0.2	2.60	1.10	4	0.1	4.2	46.20	18.60			
102 Off	51	7	0.2	357.00	61.00	4	0.3	2.20	5.70	4.00	4	0.1	2.4	43.60	18.30			
103 Off	51	7	EL	666.00	61.70	4	0.3	2.90	14.30	7.00	4	0.1	2.9	42.40	17.70			
104 Off	51	7	EL	233.00	29.20	4	0.3	1.90	3.50	2.50	4	0.1	2.7	39.90	17.10			
105 Off	51	7	EL	129.00	22.50	4	0.3	0.70	1.20	0.90	4	0.1	2.1	36.50	15.70			
108 Off	49	7	EL	86.40	11.00	4	0.3	EL	0.90	0.40	4	0.1	3.4	57.50	23.20			
110 Off	52	7	EL	91.40	11.90	4	0.3	EL	2.20	0.90	4	0.1	2.6	45.40	18.40			
111 Off	49	7	EL	79.70	7.20	4	0.3	0.20	0.60	0.30	4	0.1	2.2	43.80	17.70			
112 Off	51	7	EL	91.70	12.90	4	0.3	0.30	1.10	0.60	4	0.1	2.2	42.60	17.40			
115 Off	50	7	EL	30.70	1.60	3	0.3	0.30	0.90	0.60	3	0.1	11	34.70	19.30			
118 Off	49	7	EL	846.00	31.20	4	0.3	0.90	3.40	2.20	4	0.1	2.4	48.10	20.40			
122 Off	52	7	EL	514.00	31.90	12	1.7	EL	3.70	1.60	12	0.3	1.3	35.90	13.00			
123 Off	51	7	EL	776.00	52.60	12	1.7	1.20	109.00	16.50	12	0.3	2.2	48.60	17.10			
124 Off	50	7	EL	899.00	59.40	12	1.7	EL	94.20	15.80	12	0.3	1.8	46.30	17.00			
N	707	14	1	14	14	79	14	10	14	14	79	14	14	14	14			
Min		7	0.2	30.70	1.60		0.3	0.2	0.60	0.30		0.1	1.3	34.70	13.00			
Max		7	0.2	899.00	70.20		1.7	2.9	109.00	16.50		0.3	11	57.50	23.20			
Median		7	--	295.00	30.20		0.3	0.80	3.00	1.35		0.1	2.4	43.70	17.70			
Mean		7	--	369.21	33.16		0.60	1.08	17.38	3.89		0.143	3.1	43.68	17.92			
StdDev		0	--	315.19	23.51		0.60	0.95	35.97	5.50		0.085	2.3778	5.95	2.29			
EL <sup>c</sup>					6.5					0.1					16.3			
Reference	Farmer and Carfagno 1982																	
	Effluent intake concentration					67.6	Effluent intake concentration					20.70	Effluent intake concentration					0.00

a. -- = no data; BEL = below environmental level; BRB = below reagent blank; EL = environmental (activity concentration) level; LDL = lower detection limit at 95% confidence level; ; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.  
 b. EL indicates that 'Min' and 'Mean' values included as reported; however, these values should be interpreted as "BEL".  
 c. EL values from sample location 119.

**ATTACHMENT D**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001**  
 Page 11 of 38

Table D-10. Mound air-monitoring data for 1982.<sup>a</sup>

Location	<sup>3</sup> H incremental concentration (10 <sup>-12</sup> μCi/ml)					<sup>238</sup> Pu incremental concentration (10 <sup>-18</sup> μCi/ml)					<sup>239,240</sup> Pu concentration (10 <sup>-18</sup> μCi/ml)							
	Sample s	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean			
211 On	52	5	EL <sup>b</sup>	158.00	52.60	12	1.0	16.60	630.00	88.00	12	0.2	1	5.80	2.90			
212 On	50	5	EL	107.00	39.30	12	1.0	2.50	34.60	8.50	12	0.2	0.3	5.20	2.50			
213 On	48	5	EL	610	56.50	12	1.0	17.2	125	38.3	12	0.2	0.1	5.50	2.4			
214 On	41	5	EL	90	30.2	12	1.0	7.3	50.2	23.9	12	0.2	0.4	5.70	2.8			
215 On	46	5	EL	64.80	20.70	12	1.0	1.60	15.10	5.20	12	0.2	0.02	4.80	2.40			
N	237	5	0	5	5	60	5	5	5	5	60	5	5	5	5			
Min		5	BEL	64.80	20.70		1.0	1.60	15.10	5.20		0.2	0.02	4.80	2.40			
Max		5	BEL	610.00	56.50		1.0	17.20	630.00	88.00		0.2	1.00	5.80	2.90			
Median		5	--	107.00	39.30		1.0	7.30	50.20	23.90		0.2	0.30	5.50	2.50			
Mean		5	--	205.96	39.86		1.0	9.04	170.98	32.78		0.2	0.36	5.40	2.60			
StdDev		0	--	228.43	15.00		0.0	7.50	259.95	33.57		0.0	0.39	0.41	0.23			
101 Off	32	5	EL	175.00	47.00	4	0.3	0.5	4.10	1.80	4	0.1	0.03	6.20	2.60			
102 Off	52	5	EL	188.00	35.70	4	0.3	2.10	6.30	4.20	4	0.1	0.3	5.30	2.60			
103 Off	50	5	EL	102.00	31.30	4	0.3	1.00	6.80	3.70	4	0.1	0.2	4.70	2.30			
104 Off	51	5	EL	63.80	10.90	4	0.3	0.90	2.30	1.40	4	0.1	0.4	4.40	2.20			
105 Off	50	5	EL	42.70	8.10	4	0.3	0.10	1.20	0.60	4	0.1	0.2	4.50	2.10			
108 Off	46	5	EL	47.70	7.30	4	0.3	EL	0.30	EL	4	0.1	0.5	6.30	2.70			
110 Off	51	5	EL	47.50	6.30	4	0.3	EL	0.40	EL	4	0.1	0.3	4.30	2.00			
111 Off	49	5	EL	40.40	5.70	4	0.3	EL	0.80	0.30	4	0.1	0.4	5.40	2.60			
112 Off	51	5	EL	41.20	8.10	4	0.3	EL	0.50	0.10	4	0.1	0.4	5.60	2.50			
115 Off	51	5	EL	36.70	1.10	4	0.3	EL	0.30	0.10	4	0.1	0.5	4.10	2.00			
118 Off	37	5	EL	51.40	6.60	4	0.3	EL	1.40	0.80	4	0.1	0.4	5.40	2.70			
122 Off	51	5	EL	90.10	17.00	12	1	0.20	5.00	2.50	12	2	--	5.30	2.30			
123 Off	52	5	EL	278.00	28.00	12	1	4.30	65.10	17.10	12	2	0.4	6.30	2.60			
124 Off	43	5	EL	70.70	20.00	12	1	1.50	10.90	4.30	12	2	0.4	5.90	2.50			
N	666	14	0	14	14	80	14	8	14	12	80	14	13	14	14			
Min		5	BEL	36.70	1.10		0.3	0.1	0.30	0.10		0.1	0.03	4.10	2.00			
Max		5	BEL	278.00	47.00		1	4.3	65.10	17.10		2	0.5	6.30	2.70			
Median		5	--	57.60	9.50		0.3	0.95	1.85	1.60		0.1	0.4	5.35	2.50			
Mean		5	--	91.09	16.65		0.45	1.33	7.53	3.08		0.507	0.3408	5.26	2.41			
StdDev		0	--	72.52	13.80		0.30	1.37	16.87	4.68		0.809	0.1327	0.76	0.25			
EL <sup>c</sup>					7.3					0.3					2.6			
Reference	Carfagno and Farmer 1983																	
	Effluent intake concentration					39.30	Effluent intake concentration					23.90	Effluent intake concentration					0.00

a. -- = no data; BEL = below environmental level; BRB = below reagent blank; EL = environmental (activity concentration) level; LDL = lower detection limit at 95% confidence level; ; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.  
 b. EL indicates that 'Min' and 'Mean' values included as reported; however, these values should be interpreted as "BEL".  
 c. EL values from sample location 119.

**ATTACHMENT D**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001**  
Page 12 of 38

Table D-11. Mound air-monitoring data for 1983.<sup>a</sup>

Location	HTO incremental concentration (10 <sup>-12</sup> μCi/ml)					<sup>238</sup> Pu incremental concentration (10 <sup>-18</sup> μCi/ml)					<sup>239,240</sup> Pu concentration (10 <sup>-18</sup> μCi/ml)							
	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean			
211 On	49	4	EL <sup>b</sup>	120.00	35.30	12	1.0	7.60	114.00	29.40	12	0.3	0.3	13.50	2.30			
212 On	49	4	EL	158.00	32.10	12	1.0	2.50	10.70	6.00	12	0.3	0.4	15.50	2.30			
213 On	46	4	EL	225	42.50	12	1.0	38.4	151	74.2	12	0.3	0.3	17.80	3			
214 On	52	4	EL	445	34.3	12	1.0	3.3	29.3	13.2	12	0.3	0.2	15.10	2.2			
215 On	51	4	EL	173.00	21.20	12	1.0	1.30	6.00	2.70	12	0.3	0.1	14.10	1.90			
N	247	5	0	5	5	60	5	5	5	5	60	5	5	5	5			
Min		4	BEL	120.00	21.20		1.0	1.30	6.00	2.70		0.3	0.10	13.50	1.90			
Max		4	BEL	445.00	42.50		1.0	38.40	151.00	74.20		0.3	0.40	17.80	3.00			
Median		4	--	173.00	34.30		1.0	3.30	29.30	13.20		0.3	0.30	15.10	2.30			
Mean		4	--	224.20	33.08		1.0	10.62	62.20	25.10		0.3	0.26	15.20	2.34			
StdDev		0	--	129.05	7.70		0.0	15.71	66.07	29.32		0.0	0.11	1.66	0.40			
101 Off	51	4	EL	68.20	25.30	4	0.3	0.3	1.30	0.80	4	0.2	0.6	9.10	2.90			
102 Off	51	4	EL	97.30	26.00	4	0.3	0.70	7.10	2.60	4	0.2	0.6	7.10	2.40			
103 Off	48	4	EL	102.00	19.70	4	0.3	1.50	12.60	6.30	4	0.2	0.7	7.60	2.50			
104 Off	49	4	EL	45.60	7.80	4	0.3	0.30	13.60	4.10	4	0.2	0.6	6.90	2.30			
105 Off	49	4	EL	39.50	7.70	4	0.3	0.20	1.00	0.50	4	0.2	0.5	7.60	2.50			
108 Off	51	4	EL	28.80	4.50	4	0.3	EL	0.20	EL	4	0.2	0.6	5.20	1.90			
110 Off	50	4	EL	45.00	2.40	4	0.3	EL	1.00	0.40	4	0.2	0.2	6.30	2.10			
111 Off	51	4	EL	35.40	4.60	4	0.3	EL	1.20	0.50	4	0.2	0.7	4.80	1.90			
112 Off	52	4	EL	29.00	7.30	4	0.3	EL	0.60	0.20	4	0.2	0.3	8.00	2.50			
115 Off	51	4	EL	15.20	0.20	4	0.3	EL	1.80	0.50	4	0.2	0.3	6.60	2.20			
118 Off	50	4	EL	53.50	7.50	4	0.3	EL	0.70	0.40	4	0.2	0.6	9.60	3.10			
122 Off	50	4	EL	172.00	21.50	12	1	EL	9.40	1.80	12	3	0.02	8.90	1.50			
123 Off	52	4	EL	197.00	30.70	12	1	2.30	33.10	12.20	12	3	--	20.50	2.70			
124 Off	51	4	EL	266.00	32.60	12	1	1.40	12.70	5.80	12	3	0.3	22.10	2.80			
N	706	14	0	14	14	80	14	7	14	13	80	14	13	14	14			
Min		4	BEL	15.20	0.20		0.3	0.2	0.20	0.20		0.2	0.02	4.80	1.50			
Max		4	BEL	266.00	32.60		1	2.3	33.10	12.20		3	0.7	22.10	3.10			
Median		4	--	49.55	7.75		0.3	0.70	1.55	0.80		0.2	0.6	7.60	2.45			
Mean		4	--	85.32	14.13		0.45	0.96	6.88	2.78		0.8	0.4631	9.31	2.38			
StdDev		0	--	75.16	11.28		0.30	0.80	9.14	3.54		1.192	0.2146	5.27	0.44			
EL <sup>c</sup>					1.4					0.2					1			
Reference	Carfagno and Farmer 1984																	
	Effluent intake concentration					34.30	Effluent intake concentration					13.20	Effluent intake concentration					1.30

a. -- = no data; BEL = below environmental level; BRB = below reagent blank; EL = environmental (activity concentration) level; LDL = lower detection limit at 95% confidence level; ; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.  
b. EL indicates that 'Min' and 'Mean' values included as reported; however, these values should be interpreted as "BEL".  
c. EL values from sample location 119.

**ATTACHMENT D**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001**  
Page 13 of 38

Table D-12. Mound air-monitoring data for 1984.<sup>a</sup>

Location	HTO incremental concentration (10 <sup>-12</sup> μCi/ml)					<sup>238</sup> Pu incremental concentration (10 <sup>-18</sup> μCi/ml)					<sup>239,240</sup> Pu concentration (10 <sup>-18</sup> μCi/ml)							
	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean			
211 On	49	7	EL <sup>b</sup>	160.00	22.10	12	1.0	9.20	99.70	41.90	12	0.2	--	2.10	1.00			
212 On	50	7	EL	67.90	21.10	12	1.0	1.80	74.80	17.10	12	0.2	0.1	1.90	0.60			
213 On	49	7	EL	142	28.30	12	1.0	18.3	270	126	12	0.2	0.3	2.10	1.1			
214 On	53	7	EL	173	26.7	12	1.0	0.5	63.8	23.2	12	0.2	0.2	2.10	0.7			
215 On	51	7	EL	183.00	21.50	12	1.0	EL	14.00	5.00	12	0.2	0.1	1.60	0.60			
N	252	5	0	5	5	60	5	4	5	5	60	5	4	5	5			
Min		7	BEL	67.90	21.10		1.0	0.50	14.00	5.00		0.2	0.10	1.60	0.60			
Max		7	BEL	183.00	28.30		1.0	18.30	270.00	126.00		0.2	0.30	2.10	1.10			
Median		7	--	160.00	22.10		1.0	5.50	74.80	23.20		0.2	0.15	2.10	0.70			
Mean		7	--	145.18	23.94		1.0	7.45	104.46	42.64		0.2	0.18	1.96	0.80			
StdDev		0	--	45.84	3.32		0.0	8.19	97.65	48.47		0.0	0.10	0.22	0.23			
101 Off	53	7	EL	117.00	18.80	4	0.3	1.2	5.00	2.90	4	0.2	0.3	1.00	0.60			
102 Off	51	7	EL	69.90	17.20	4	0.3	1.20	36.10	11.20	4	0.2	0.4	0.70	0.60			
103 Off	53	7	EL	39.60	11.50	3	0.3	2.70	6.20	4.60	3	0.2	0.4	0.70	0.50			
104 Off	52	7	EL	84.30	8.70	4	0.3	0.70	4.40	2.30	4	0.2	0.1	0.90	0.40			
105 Off	53	7	EL	38.40	5.00	4	0.3	0.08	1.50	0.80	4	0.2	0.2	0.50	0.30			
108 Off	50	7	EL	31.80	2.60	4	0.3	0.10	2.20	0.70	4	0.2	0.2	0.70	0.50			
110 Off	34	7	EL	28.80	0.90	3	0.3	EL	0.70	0.20	3	0.2	0.1	0.50	0.30			
111 Off	48	7	EL	18.90	EL	4	0.3	0.01	0.40	0.20	4	0.2	0.2	0.90	0.50			
112 Off	51	7	EL	44.50	1.10	4	0.3	EL	0.50	0.20	4	0.2	0.2	0.70	0.40			
115 Off	53	7	EL	21.20	EL	4	0.3	EL	0.70	0.30	4	0.2	0.2	0.70	0.40			
118 Off	52	7	EL	36.80	1.90	4	0.3	1.10	13.70	5.00	4	0.2	0.2	0.80	0.50			
122 Off	51	7	EL	58.10	14.40	12	1	EL	6.90	2.10	12	0.2	0.2	0.80	0.50			
123 Off	51	7	EL	92.00	15.80	12	1	1.50	49.00	15.00	12	0.2	0.3	1.30	0.70			
124 Off	52	7	EL	137.00	16.10	12	1	1.70	126.90	22.00	12	0.2	0.2	2.10	0.60			
N	704	14	0	14	12	78	14	10	14	14	78	14	14	14	14			
Min		7	BEL	18.90	0.90		0.3	0.01	0.40	0.20		0.2	0.1	0.50	0.30			
Max		7	BEL	137.00	18.80		1	2.7	126.90	22.00		0.2	0.4	2.10	0.70			
Median		7	--	42.05	10.10		0.3	1.15	4.70	2.20		0.2	0.2	0.75	0.50			
Mean		7	--	58.45	9.50		0.45	1.03	18.16	4.82		0.2	0.2286	0.88	0.49			
StdDev		0	--	36.67	6.93		0.30	0.85	34.55	6.65		3E-09	0.0914	0.41	0.12			
EL <sup>c</sup>					4.1					0.002					0.4			
Reference	Carfagno and Farmer 1985																	
	Effluent intake concentration					22.10	Effluent intake concentration					23.20	Effluent intake concentration					0.30

a. -- = no data; BEL = below environmental level; BRB = below reagent blank; EL = environmental (activity concentration) level; LDL = lower detection limit at 95% confidence level; ; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.

b. EL indicates that 'Min' and 'Mean' values included as reported; however, these values should be interpreted as "BEL".

c. EL values from sample location 119.



**ATTACHMENT D**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001**  
Page 14 of 38

Table D-13. Mound air-monitoring data for 1985.<sup>a</sup>

Location	HTO incremental concentration (10 <sup>-12</sup> μCi/ml)					<sup>238</sup> Pu incremental concentration (10 <sup>-18</sup> μCi/ml)					<sup>239,240</sup> Pu concentration (10 <sup>-18</sup> μCi/ml)							
	Sample s	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean			
211 On	52	14	EL <sup>b</sup>	167.00	32.70	12	0.7	17.20	1269.00	182.00	12	0.38	--	7.97	1.21			
212 On	50	14	1.54	115.00	29.70	12	0.7	2.26	42.80	16.80	12	0.38	--	0.93	0.31			
213 On	49	14	EL	104	27.30	12	0.7	35	369	153	12	0.38	0.1	3.03	0.99			
214 On	52	14	EL	189	24.8	12	0.7	12.1	772	126	12	0.38	--	2.29	0.76			
215 On	52	14	EL	134.00	19.80	12	0.7	0.96	137.00	16.50	12	0.38	--	1.59	0.37			
N	255	5	1	5	5	60	5	5	5	5	60	5	1	5	5			
Min		14	1.54	104.00	19.80		0.7	0.96	42.80	16.50		0.4	0.10	0.93	0.31			
Max		14	1.54	189.00	32.70		0.7	35.00	1269.00	182.00		0.4	0.10	7.97	1.21			
Median		14	--	134.00	27.30		0.7	12.10	369.00	126.00		0.4	--	2.29	0.76			
Mean		14	--	141.80	26.86		0.7	13.50	517.96	98.86		0.4	--	3.16	0.73			
StdDev		0	--	35.60	4.91		0.0	13.80	505.39	77.62		0.0	--	2.80	0.39			
101 Off	42	14	EL	40.40	17.40	3	0.14	1.13	4.95	2.46	3	0.08	0.07	0.42	0.25			
102 Off	51	14	3.94	70.90	29.20	4	0.14	3.10	14.70	8.05	4	0.08	0.15	0.38	0.27			
103 Off	52	14	EL	43.60	10.90	4	0.14	2.20	10.80	6.35	4	0.08	0.24	0.55	0.39			
104 Off	52	14	EL	52.30	9.39	4	0.14	1.04	2.89	1.73	4	0.08	0.12	0.26	0.17			
105 Off	49	14	EL	26.60	4.89	4	0.14	0.46	6.03	2.47	4	0.08	0.09	0.25	0.17			
108 Off	50	14	EL	21.20	2.30	4	0.14	EL	0.19	EL	4	0.08	0.22	0.42	0.33			
110 Off	49	14	EL	26.20	0.99	4	0.14	EL	0.15	0.04	4	0.08	0.01	0.33	0.16			
111 Off	51	14	EL	20.80	EL	4	0.14	0.08	0.32	0.21	4	0.08	0.09	0.44	0.21			
112 Off	52	14	EL	19.50	2.45	4	0.14	0.01	2.61	0.85	4	0.08	0.08	0.38	0.22			
115 Off	45	14	EL	11.60	EL	4	0.14	EL	0.01	0.15	4	0.08	0.1	0.39	0.23			
118 Off	50	14	EL	31.70	6.49	4	0.14	1.06	17.40	10.80	4	0.08	0.16	0.41	0.29			
122 Off	51	14	EL	68.30	11.70	12	0.69	0.66	37.40	8.43	12	0.38	--	0.87	0.33			
123 Off	52	14	EL	116.00	20.20	12	0.69	1.06	352.00	40.20	12	0.38	0.08	3.72	0.84			
124 Off	50	14	EL	55.50	18.20	12	0.69	2.16	56.80	13.70	12	0.38	--	0.70	0.20			
N	696	14	1	14	12	79	14	11	14	13	79	14	12	14	14			
Min		14	3.94	11.60	0.99		0.14	0.005	0.01	0.04		0.08	0.01	0.25	0.16			
Max		14	3.94	116.00	29.20		0.69	3.1	352.00	40.20		0.38	0.24	3.72	0.84			
Median		14	--	36.05	10.15		0.14	1.06	5.49	2.47		0.08	0.095	0.42	0.24			
Mean		14	--	43.19	11.18		0.26	1.18	36.16	7.34		0.144	0.1175	0.68	0.29			
StdDev		0	--	27.99	8.62		0.23	0.95	92.38	10.85		0.128	0.0652	0.89	0.17			
EL <sup>c</sup>					2.54					0.15					0.13			
Reference	Carfagno and Farmer 1986																	
	Effluent intake concentration					27.30	Effluent intake concentration					126.00	Effluent intake concentration					0.63

a. -- = no data; BEL = below environmental level; BRB = below reagent blank; EL = environmental (activity concentration) level; LDL = lower detection limit at 95% confidence level; ; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.  
b. EL indicates that 'Min' and 'Mean' values included as reported; however, these values should be interpreted as "BEL".  
c. EL values from sample location 119.

**ATTACHMENT D**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001**  
 Page 15 of 38

Table D-14. Mound air-monitoring data for 1986.<sup>a</sup>

Location	HTO incremental concentration (10 <sup>-12</sup> µCi/ml)					<sup>238</sup> Pu incremental concentration (10 <sup>-18</sup> µCi/ml)					<sup>239,240</sup> Pu concentration (10 <sup>-18</sup> µCi/ml)							
	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean			
211 On	50	17	EL <sup>b</sup>	94.00	23.80	11	0.2	8.29	388.00	125.00	11	0.15	--	3.76	0.92			
212 On	51	17	EL	75.30	21.10	12	0.2	4.19	194.00	53.40	12	0.15	--	0.82	0.31			
213 On	50	17	2.19	123	40.90	12	0.2	53	447	178	12	0.15	0.53	5.53	1.47			
214 On	50	17	EL	100	21.3	12	0.2	7.35	372	93.4	12	0.15	--	1.55	0.63			
215 On	51	17	EL	64.40	15.50	12	0.2	1.55	127.00	22.40	12	0.15	--	1.14	0.31			
N	252	5	1	5	5	59	5	5	5	5	59	5	1	5	5			
Min		17	2.19	64.40	15.50		0.2	1.55	127.00	22.40		0.2	0.53	0.82	0.31			
Max		17	2.19	123.00	40.90		0.2	53.00	447.00	178.00		0.2	0.53	5.53	1.47			
Median		17	--	94.00	21.30		0.2	7.35	372.00	93.40		0.2	--	1.55	0.63			
Mean		17	--	91.34	24.52		0.2	14.88	305.60	94.44		0.2	--	2.56	0.73			
StdDev		0	--	22.73	9.65		0.0	21.48	137.43	60.81		0.0	--	2.02	0.49			
101 Off	48	17	EL	85.80	24.50	4	0.08	0.49	10.20	3.50	4	0.04	0.07	0.41	0.25			
102 Off	50	17	EL	120.00	23.20	4	0.08	3.41	38.30	14.30	4	0.04	0.05	0.37	0.28			
103 Off	49	17	EL	31.90	8.57	4	0.08	3.08	23.80	10.50	4	0.04	0.03	0.39	0.24			
104 Off	50	17	EL	60.50	11.00	4	0.08	0.41	19.80	5.91	4	0.04	0.01	0.62	0.27			
105 Off	50	17	EL	35.30	3.96	4	0.08	0.27	26.40	7.06	4	0.04	0.08	0.41	0.27			
108 Off	51	17	EL	37.20	5.61	4	0.08	EL	0.26	EL	4	0.04	0.15	0.41	0.22			
110 Off	49	17	EL	32.90	3.68	4	0.08	EL	0.33	0.05	4	0.04	0.25	0.58	0.29			
111 Off	52	17	EL	59.00	3.63	4	0.08	EL	0.56	0.30	4	0.04	0.09	0.23	0.15			
112 Off	47	17	EL	38.90	4.02	4	0.08	0.18	13.30	3.52	4	0.04	0.08	0.21	0.13			
115 Off	50	17	EL	188.00	6.73	4	0.08	EL	0.81	0.27	4	0.04	0.11	0.28	0.15			
118 Off	48	17	EL	32.00	4.50	4	0.08	0.58	3.96	1.94	4	0.04	0.07	0.38	0.20			
122 Off	52	17	EL	93.60	13.70	12	0.23	0.93	77.30	9.90	12	0.15	--	1.01	0.26			
123 Off	43	17	EL	53.50	12.00	10	0.23	1.49	66.50	26.70	10	0.15	--	0.99	0.36			
124 Off	48	17	EL	89.60	21.20	12	0.23	1.14	82.30	20.70	12	0.15	--	1.43	0.37			
N	687	14	0	14	14	78	14	10	14	13	78	14	11	14	14			
Min		17	BEL	31.90	3.63		0.08	0.18	0.26	0.05		0.04	0.01	0.21	0.13			
Max		17	BEL	188.00	24.50		0.23	3.41	82.30	26.70		0.15	0.25	1.43	0.37			
Median		17	--	56.25	7.65		0.08	0.76	16.55	5.91		0.04	0.08	0.41	0.26			
Mean		17	--	68.44	10.45		0.11	1.20	25.99	8.05		0.064	0.09	0.55	0.25			
StdDev		0	--	44.36	7.55		0.06	1.15	29.27	8.29		0.047	0.065	0.35	0.07			
EL <sup>c</sup>					0.91					0.16					0.18			
Reference	Carfagno and Farmer 1987																	
	Effluent intake concentration					21.30	Effluent intake concentration					93.40	Effluent intake concentration					0.45

a. -- = no data; BEL = below environmental level; BRB = below reagent blank; EL = environmental (activity concentration) level; LDL = lower detection limit at 95% confidence level; ; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.  
 b. EL indicates that 'Min' and 'Mean' values included as reported; however, these values should be interpreted as "BEL".  
 c. EL values from sample location 119.

**ATTACHMENT D**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001**

Page 16 of 38

Table D-15. Mound air-monitoring data for 1987.<sup>a</sup>

Location	HTO incremental concentration (10 <sup>-12</sup> μCi/ml)					<sup>238</sup> Pu incremental concentration (10 <sup>-18</sup> μCi/ml)					<sup>239,240</sup> Pu concentration (10 <sup>-18</sup> μCi/ml)						
	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean		
211 On	51	16	EL <sup>b</sup>	95.00	28.20	12	0.3	29.70	141.00	79.00	12	0.14	0.24	2.35	0.83		
212 On	51	16	EL	148.00	33.70	12	0.3	6.40	56.20	15.00	12	0.14	--	0.75	0.28		
213 On	51	16	EL	144	38.80	12	0.3	65.4	860	189	12	0.14	--	3.43	0.7		
214 On	51	16	EL	176	33.3	11	0.3	9.2	95.5	43.5	11	0.14	--	0.73	0.29		
215 On	47	16	EL	152.00	21.70	12	0.3	1.79	21.70	8.40	12	0.14	--	0.60	0.19		
N	251	5	0	5	5	59	5	5	5	5	59	5	1	5	5		
Min		16	BEL	95.00	21.70		0.3	1.79	21.70	8.40		0.1	0.24	0.60	0.19		
Max		16	BEL	176.00	38.80		0.3	65.40	860.00	189.00		0.1	0.24	3.43	0.83		
Median		16	--	148.00	33.30		0.3	9.20	95.50	43.50		0.1	--	0.75	0.29		
Mean		16	--	143.00	31.14		0.3	22.50	234.88	66.98		0.1	--	1.57	0.46		
StdDev		0	--	29.58	6.47		0.0	26.25	352.27	73.69		0.0	--	1.26	0.29		
101 Off	51	16	EL	258.00	29.20	4	0.05	0.11	12.70	4.10	4	0.02	0.07	0.30	0.17		
102 Off	52	16	0.64	85.60	23.50	4	0.05	3.29	20.00	8.60	4	0.02	0.07	0.21	0.16		
103 Off	52	16	EL	63.50	17.20	4	0.05	1.93	17.70	8.60	4	0.02	0.11	0.19	0.16		
104 Off	48	16	EL	52.40	9.87	4	0.05	0.85	3.44	2.38	4	0.02	0.02	0.23	0.14		
105 Off	50	16	EL	39.40	9.39	4	0.05	0.42	1.65	0.79	4	0.02	0.01	0.47	0.16		
108 Off	48	16	EL	47.70	7.68	4	0.05	0.01	0.10	0.05	4	0.02	0.06	0.23	0.11		
110 Off	51	16	EL	51.30	5.90	4	0.05	EL	0.32	0.03	4	0.02	--	0.37	0.14		
111 Off	52	16	EL	16.30	2.47	4	0.05	0.07	0.58	0.28	4	0.02	0.05	0.19	0.13		
112 Off	52	16	EL	42.30	6.62	4	0.05	0.02	0.54	0.27	4	0.02	0.03	0.11	0.09		
115 Off	52	16	EL	31.70	2.79	4	0.05	0.07	0.13	0.02	4	0.02	0.06	0.22	0.12		
118 Off	50	16	EL	69.80	9.33	4	0.05	0.62	1.42	1.03	4	0.02	0.06	0.18	0.11		
122 Off	49	16	EL	45.20	8.14	12	0.34	0.27	10.60	5.28	12	0.14	--	0.71	0.14		
123 Off	48	16	EL	261.00	24.60	10	0.34	2.49	41.60	10.70	11	0.14	--	1.36	0.25		
124 Off	48	16	EL	75.20	23.30	12	0.34	2.44	172.10	22.00	12	0.14	--	0.73	0.24		
N	703	14	1	14	14	78	14	13	14	14	79	14	10	14	14		
Min		16	0.64	16.30	2.47		0.05	0.01	0.10	0.02		0.02	0.01	0.11	0.09		
Max		16	0.64	261.00	29.20		0.34	3.29	172.10	22.00		0.14	0.11	1.36	0.25		
Median		16	--	51.85	9.36		0.05	0.42	2.55	1.71		0.02	0.06	0.23	0.14		
Mean		16	--	81.39	12.86		0.11	0.97	20.21	4.58		0.046	0.054	0.39	0.15		
StdDev		0	--	77.53	8.88		0.12	1.15	45.27	6.23		0.051	0.0288	0.34	0.05		
EL <sup>c</sup>					--					0.07					0.13		
Reference	Carfagno and Farmer 1988					Effluent intake concentration					43.50	Effluent intake concentration					0.22
						Effluent intake concentration					33.30						

- a. -- = no data; BEL = below environmental level; BRB = below reagent blank; EL = environmental (activity concentration) level; LDL = lower detection limit at 95% confidence level; ; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.
- b. EL indicates that 'Min' and 'Mean' values included as reported; however, these values should be interpreted as "BEL".
- c. EL values from sample location 119.

**ATTACHMENT D**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001**  
Page 17 of 38

Table D-16. Mound air-monitoring data for 1988.<sup>a</sup>

Location	HTO incremental concentration (10 <sup>-12</sup> μCi/ml)					<sup>238</sup> Pu incremental concentration (10 <sup>-18</sup> μCi/ml)					<sup>239,240</sup> Pu concentration (10 <sup>-18</sup> μCi/ml)							
	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean			
211 On	50	13	EL <sup>b</sup>	147.00	20.80	12	0.3	9.00	313.00	80.00	12	0.2	--	2.90	0.80			
212 On	51	13	1.4	81.10	24.10	12	0.3	2.00	85.00	13.00	12	0.2	--	0.80	0.20			
213 On	51	13	2.3	502	40.60	12	0.3	21	146	61	12	0.2	--	1.30	0.6			
214 On	51	13	EL	165	24.5	11	0.3	5	354	58	11	0.2	--	1.10	0.4			
215 On	52	13	EL	189.00	22.20	12	0.3	1.00	19.00	6.00	12	0.2	--	0.70	0.30			
N	255	5	2	5	5	59	5	5	5	5	59	5	0	5	5			
Min		13	1.40	81.10	20.80		0.3	1.00	19.00	6.00		0.2	BEL	0.70	0.20			
Max		13	2.30	502.00	40.60		0.3	21.00	354.00	80.00		0.2	BEL	2.90	0.80			
Median		13	1.85	165.00	24.10		0.3	5.00	146.00	58.00		0.2	--	1.10	0.40			
Mean		13	1.85	216.82	26.44		0.3	7.60	183.40	43.60		0.2	--	1.36	0.46			
StdDev		0	0.64	164.38	8.05		0.0	8.11	144.92	32.35		0.0	--	0.89	0.24			
101 Off	52	13	EL	109.00	13.30	4	0.1	0.1	2.40	1.40	4	0.2	0.2	0.80	0.40			
102 Off	52	13	EL	42.10	14.50	4	0.1	1.70	20.40	8.20	4	0.2	0.2	0.30	0.20			
103 Off	51	13	EL	163.00	16.20	4	0.1	1.60	31.10	13.30	4	0.2	0.2	0.60	0.40			
104 Off	52	13	EL	60.50	10.70	4	0.1	0.20	4.70	2.40	4	0.2	0.03	0.40	0.20			
105 Off	52	13	EL	25.40	5.70	4	0.1	EL	0.60	0.30	4	0.2	0.1	0.90	0.40			
108 Off	50	13	EL	33.10	4.90	4	0.1	EL	0.20	0.00	4	0.2	0.1	0.20	0.20			
110 Off	51	13	EL	12.60	1.50	4	0.1	EL	EL	EL	4	0.2	0.1	0.20	0.10			
111 Off	51	13	EL	17.80	1.20	4	0.1	EL	0.70	0.30	4	0.2	0.2	0.30	0.20			
112 Off	52	13	EL	53.90	5.10	4	0.1	EL	0.30	0.10	4	0.2	0.1	0.20	0.10			
115 Off	52	13	EL	13.20	1.10	4	0.1	EL	0.40	EL	4	0.2	0.2	0.40	0.30			
118 Off	51	13	EL	34.20	5.50	4	0.1	0.40	1.90	1.10	4	0.2	0.1	0.30	0.20			
122 Off	50	13	EL	107.00	15.80	12	0.3	0.50	20.20	7.50	12	0.02	--	0.60	0.20			
123 Off	52	13	EL	241.00	21.40	11	0.3	0.50	20.50	8.00	11	0.02	--	0.40	0.10			
124 Off	50	13	EL	100.00	17.00	12	0.3	2.40	16.30	7.10	12	0.02	--	0.50	0.20			
N	718	14	0	14	14	79	14	8	13	12	79	14	11	14	14			
Min		13	BEL	12.60	1.10		0.1	0.1	0.20	0.00		0.02	0.03	0.20	0.10			
Max		13	BEL	241.00	21.40		0.3	2.4	31.10	13.30		0.2	0.2	0.90	0.40			
Median		13	--	48.00	8.20		0.1	0.50	2.40	1.90		0.2	0.1	0.40	0.20			
Mean		13	--	72.34	9.56		0.14	0.93	9.21	4.14		0.16	0.14	0.44	0.23			
StdDev		0	--	65.99	6.78		0.09	0.85	10.83	4.45		0.08	0.06	0.22	0.11			
EL <sup>c</sup>					2					0.2					0.2			
Reference	Carfagno and Farmer 1989					Effluent intake concentration					58.00	Effluent intake concentration					0.20	
	Effluent intake concentration					24.10	Effluent intake concentration					58.00	Effluent intake concentration					0.20

a. -- = no data; BEL = below environmental level; BRB = below reagent blank; EL = environmental (activity concentration) level; LDL = lower detection limit at 95% confidence level; ; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.  
b. EL indicates that 'Min' and 'Mean' values included as reported; however, these values should be interpreted as "BEL".  
c. EL values from sample location 119.

**ATTACHMENT D**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001**  
 Page 18 of 38

Table D-17. Mound air-monitoring data for 1989.<sup>a</sup>

Location	HTO incremental concentration (10 <sup>-12</sup> µCi/ml)					<sup>238</sup> Pu incremental Concentration (10 <sup>-18</sup> µCi/ml)					<sup>239,240</sup> Pu concentration (10 <sup>-18</sup> µCi/ml)							
	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean			
211 On	50	29	0.2	179.00	25.00	12	0.3	2.00	107.00	23.00	12	0.1	--	1.10	0.30			
212 On	50	29	EL <sup>b</sup>	173.00	28.00	12	0.3	EL	8.00	3.00	12	0.1	--	1.20	0.20			
213 On	51	29	8	138	31.00	12	0.3	12	263	46	12	0.1	--	2.90	0.6			
214 On	50	29	1	98	24	12	0.3	3	57	15	12	0.1	--	2.80	0.4			
215 On	51	29	EL	83.00	22.00	12	0.3	1.00	15.00	4.00	12	0.1	--	0.50	0.10			
N	252	5	3	5	5	60	5	4	5	5	60	5	0	5	5			
Min		29	0.20	83.00	22.00		0.3	1.00	8.00	3.00		0.1	BEL	0.50	0.10			
Max		29	8.00	179.00	31.00		0.3	12.00	263.00	46.00		0.1	BEL	2.90	0.60			
Median		29	1.00	138.00	25.00		0.3	2.50	57.00	15.00		0.1	--	1.20	0.30			
Mean		29	3.07	134.20	26.00		0.3	4.50	90.00	18.20		0.1	--	1.70	0.32			
StdDev		0	4.29	43.18	3.54		0.0	5.07	104.47	17.60		0.0	--	1.08	0.19			
101 Off	53	29	EL	36.00	13.00	4	0.1	0.2	0.70	0.50	4	0.03	--	0.20	0.09			
102 Off	52	29	EL	106.00	19.00	4	0.1	0.90	2.50	1.60	4	0.03	--	0.30	0.10			
103 Off	51	29	EL	47.00	12.00	4	0.1	0.80	2.30	1.60	4	0.03	0.03	0.20	0.10			
104 Off	53	29	EL	37.00	10.00	4	0.1	0.20	1.00	0.70	4	0.03	--	0.10	0.08			
105 Off	52	29	EL	32.00	6.00	4	0.1	0.20	1.50	0.50	4	0.03	--	0.30	0.10			
108 Off	52	29	EL	14.00	2.00	4	0.1	EL	0.10	EL	4	0.03	0.08	0.10	0.09			
110 Off	52	29	EL	13.00	2.00	4	0.1	EL	0.20	EL	4	0.03	--	0.10	0.03			
111 Off	53	29	EL	19.00	2.00	4	0.1	0.10	0.50	0.20	4	0.03	0.04	1.00	0.30			
112 Off	53	29	EL	204.00	10.00	4	0.1	EL	0.30	0.20	4	0.03	0.05	0.30	0.10			
115 Off	53	29	EL	22.00	2.00	4	0.1	EL	0.10	EL	4	0.03	0.05	0.20	0.10			
118 Off	53	29	EL	22.00	6.00	4	0.1	0.10	1.00	0.60	4	0.03	--	0.30	0.10			
122 Off	53	29	EL	68.00	12.00	12	0.3	0.60	8.30	2.40	12	0.1	--	0.70	0.20			
123 Off	53	29	EL	79.00	17.00	12	0.3	1.00	8.10	3.80	12	0.1	--	0.30	0.04			
124 Off	53	29	EL	51.00	14.00	12	0.3	1.30	7.80	3.90	12	0.1	--	1.20	0.08			
N	736	14	0	14	14	80	14	10	14	11	80	14	5	14	14			
Min		29	BEL	13.00	2.00		0.1	0.1	0.10	0.20		0.03	0.03	0.10	0.03			
Max		29	BEL	204.00	19.00		0.3	1.3	8.30	3.90		0.1	0.08	1.20	0.30			
Median		29	--	36.50	10.00		0.1	0.40	1.00	0.70		0.03	0.05	0.30	0.10			
Mean		29	--	53.57	9.07		0.14	0.54	2.46	1.45		0.045	0.05	0.38	0.11			
StdDev		0	--	50.94	5.81		0.09	0.44	3.13	1.37		0.03	0.0187	0.34	0.07			
EL <sup>c</sup>					0.9					0.04					0.1			
Reference	Carfagno and Farmer 1990					Effluent intake concentration					15.00	Effluent intake concentration					0.30	
	Effluent intake concentration					25.00	Effluent intake concentration					15.00	Effluent intake concentration					0.30

a. -- = no data; BEL = below environmental level; BRB = below reagent blank; EL = environmental (activity concentration) level; LDL = lower detection limit at 95% confidence level; ; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.  
 b. EL indicates that 'Min' and 'Mean' values included as reported; however, these values should be interpreted as "BEL".  
 c. EL values from sample location 119.

**ATTACHMENT D  
MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001**

Page 19 of 38

Table D-18. Mound air-monitoring data for 1990.<sup>a,b</sup>

Location	HTO incremental concentration (10 <sup>-12</sup> µCi/ml)					<sup>238</sup> Pu incremental concentration (10 <sup>-18</sup> µCi/ml)					<sup>239,240</sup> Pu incremental concentration (10 <sup>-18</sup> µCi/ml)							
	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean			
211 On	52	29	0.54	222.36	18.57	12	0.5	5.53	89.58	16.43	12	0.4	-0.43	0.38	0.07			
212 On	52	29	1.44	49.70	15.72	12	0.5	1.49	9.69	4.32	12	0.4	-0.24	0.51	0.10			
213 On	52	29	0.87	125	38.39	12	0.5	9.47	79.44	35.04	12	0.4	0.05	0.84	0.28			
214 On	50	29	-1.44	154.3	20.7	12	0.5	2.24	12.93	5.64	12	0.4	-0.04	0.48	0.04			
215 On	52	29	-2.54	72.45	15.21	12	0.5	0.55	3.86	1.83	12	0.4	-0.18	0.12	-0.02			
N	258	5	5	5	5	60	5	5	5	5	60	5	5	5	5			
Min		29	-2.54	49.70	15.21		0.5	0.55	3.86	1.83		0.4	-0.43	0.12	-0.02			
Max		29	1.44	222.36	38.39		0.5	9.47	89.58	35.04		0.4	0.05	0.84	0.28			
Median		29	0.54	125.04	18.57		0.5	2.24	12.93	5.64		0.4	-0.18	0.48	0.07			
Mean		29	-0.23	124.77	21.71		0.5	3.86	39.10	12.65		0.4	-0.17	0.47	0.09			
StdDev		0	1.69	68.50	9.58		0.0	3.66	41.73	13.70		0.0	0.19	0.26	0.11			
101 Off	51	29	-2.48	32.02	12.25	4	0.1	0.28	1.17	0.57	4	0.1	-0.06	0.05	0.01			
102 Off	52	29	1.82	59.33	14.50	4	0.1	1.75	3.54	2.67	4	0.1	-0.01	0.03	0.00			
103 Off	52	29	-1.07	28.61	9.03	4	0.1	1.45	149.28	39.47	4	0.1	-0.02	0.42	0.15			
104 Off	52	29	-6.19	35.99	7.19	4	0.1	0.34	0.92	0.55	4	0.1	-0.08	-0.01	-0.04			
105 Off	52	29	-2.48	25.69	3.62	4	0.1	0.10	0.46	0.26	4	0.1	0.03	0.12	0.06			
108 Off	52	29	-8.94	13.86	2.62	4	0.1	-0.05	0.24	0.06	4	0.1	-0.02	0.06	0.02			
110 Off	52	29	-6.39	12.90	0.88	4	0.1	-0.04	0.15	0.05	4	0.1	-0.1	0.04	-0.02			
111 Off	52	29	-6.79	12.25	1.05	4	0.1	-0.03	0.30	0.12	4	0.1	0.02	0.08	0.06			
112 Off	51	29	-5.53	21.68	4.44	4	0.1	-0.04	0.16	0.07	4	0.1	-0.01	0.02	0.01			
115 Off	52	29	-6.21	11.69	0.82	4	0.1	-0.25	0.15	-0.05	4	0.1	-0.02	0.12	0.04			
118 Off	52	29	-7.56	22.22	3.57	4	0.1	-0.06	4.83	1.48	12	0.4	-0.02	0.05	0.02			
122 Off	50	29	-3.83	52.00	6.95	12	0.5	0.52	5.79	1.58	12	0.4	-0.41	0.24	-0.07			
123 Off	51	29	-2.89	38.43	7.51	12	0.5	0.85	18.50	4.18	12	0.4	-0.12	0.52	0.06			
124 Off	51	29	-3.56	39.50	8.16	12	0.5	-0.25	14.16	3.85	12	0.4	-0.39	0.28	-0.01			
N	722	14	14	14	14	80	14	14	14	14	88	14	14	14	14			
Min		29	-8.94	11.69	0.82		0.1	-0.25	0.15	-0.05		0.1	-0.41	-0.01	-0.07			
Max		29	1.82	59.33	14.50		0.5	1.75	149.28	39.47		0.4	0.03	0.52	0.15			
Median		29	-4.68	27.15	5.70		0.1	0.04	1.05	0.56		0.1	-0.02	0.07	0.02			
Mean		29	-4.436	29.01	5.90		0.19	0.33	14.26	3.92		0.186	-0.0864	0.14	0.02			
StdDev		0	2.8886	14.90	4.23		0.17	0.62	39.27	10.33		0.141	0.1395	0.16	0.05			
EL					2.63					0.06					0.07			
Reference	EG&G 1991																	
	Effluent intake concentration					18.60	Effluent intake concentration					5.64	Effluent intake concentration					0.07

a. -- = no data; BEL = below environmental level; BRB = below reagent blank; EL = environmental (activity concentration) level; LDL = lower detection limit at 95% confidence level; ; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.  
 b. Negative 'Min' values included as reported; however, these values should be interpreted as "BEL".

**ATTACHMENT D**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001**  
Page 20 of 38

Table D-19. Mound air-monitoring data for 1991.<sup>a,b</sup>

Location	HTO incremental concentration (10 <sup>-12</sup> µCi/ml)					<sup>238</sup> Pu incremental concentration (10 <sup>-18</sup> µCi/ml)					<sup>239,240</sup> Pu incremental concentration (10 <sup>-18</sup> µCi/ml)					
	Sample s	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean	
211 On	51	16	-0.35	42.41	11.65	12	0.7	4.90	49.72	15.73	12	0.3	-0.42	0.46	0.10	
212 On	49	16	-4.93	54.88	13.05	11	0.7	1.29	9.16	4.92	11	0.3	-0.47	0.30	-0.04	
213 On	50	16	10.04	112.61	38.91	12	0.7	12.14	69.36	34.23	12	0.3	-0.37	0.89	0.03	
214 On	51	16	-3.06	28.69	9.97	12	0.7	2.27	24.65	7.7	12	0.3	-0.27	0.43	-0.05	
215 On	51	16	-9.88	31.45	6.18	12	0.7	1.20	27.73	6.82	12	0.3	-0.34	0.17	-0.03	
N	252	5	5	5	5	59	5	5	5	5	59	5	5	5	5	
Min		16	-9.88	28.69	6.18		0.7	1.20	9.16	4.92		0.3	-0.47	0.17	-0.05	
Max		16	10.04	112.61	38.91		0.7	12.14	69.36	34.23		0.3	-0.27	0.89	0.10	
Median		16	-3.06	42.41	11.65		0.7	2.27	27.73	7.70		0.3	-0.37	0.43	-0.03	
Mean		16	-1.64	54.01	15.95		0.7	4.36	36.12	13.88		0.3	-0.37	0.45	0.00	
StdDev		0	7.40	34.35	13.09		0.0	4.60	23.55	12.10		0.0	0.08	0.27	0.06	
101 Off	50	16	-5.46	31.14	6.85	4	0.2	0.2	0.73	0.42	4	0.1	-0.14	0.02	-0.05	
102 Off	52	16	-11.16	27.79	8.27	4	0.2	0.58	2.88	1.77	4	0.1	-0.1	0.04	-0.05	
103 Off	52	16	-13.2	20.20	5.83	4	0.2	1.05	3.51	2.50	4	0.1	-0.02	0.04	0.01	
104 Off	52	16	-9.66	22.43	3.45	4	0.2	0.31	6.33	2.59	4	0.1	-0.07	0.03	-0.01	
105 Off	52	16	-10.3	32.85	4.52	4	0.2	0.04	2.63	0.88	4	0.1	-0.05	0.03	-0.01	
108 Off	52	16	-10.61	12.79	1.74	4	0.2	-0.18	0.05	-0.11	4	0.1	-0.04	0.04	-0.01	
110 Off	52	16	-13.2	20.88	0.70	4	0.2	-0.45	0.10	-0.19	4	0.1	-0.01	0.08	0.03	
111 Off	50	16	-11.34	11.42	0.44	4	0.2	-0.25	0.48	0.12	4	0.1	-0.28	0.10	-0.05	
112 Off	51	16	-6.64	13.43	2.02	4	0.2	-0.18	0.72	0.06	4	0.1	-0.09	0.09	-0.04	
115 Off	52	16	-12.7	12.93	0.58	4	0.2	-0.16	0.32	-0.01	4	0.1	-0.35	-0.02	-0.11	
118 Off	52	16	-10.25	24.59	2.76	4	0.2	-0.07	5.05	1.50	4	0.1	-0.13	-0.01	-0.06	
122 Off	51	16	-4.1	25.63	7.39	12	0.7	-0.52	2.77	1.34	12	0.3	-0.35	0.17	-0.08	
123 Off	52	16	-4.21	74.37	9.06	12	0.7	-0.01	6.10	2.63	12	0.3	-0.3	0.33	0.01	
124 Off	51	16	-12.85	40.50	6.93	12	0.7	0.01	50.58	10.01	12	0.3	-0.51	0.27	-0.02	
N	721	14	14	14	14	80	14	14	14	14	80	14	14	14	14	
Min		16	-13.2	11.42	0.44		0.2	-0.52	0.05	-0.19		0.1	-0.51	-0.02	-0.11	
Max		16	-4.1	74.37	9.06		0.7	1.05	50.58	10.01		0.3	-0.01	0.33	0.03	
Median		16	-10.46	23.51	3.99		0.2	-0.04	2.70	1.11		0.1	-0.115	0.04	-0.03	
Mean		16	-9.691	26.50	4.32		0.31	0.03	5.88	1.68		0.143	-0.1743	0.09	-0.03	
StdDev		0	3.2649	16.20	3.04		0.21	0.41	13.05	2.61		0.085	0.155	0.10	0.04	
EL					1.85					0.24					0.1	
Reference	EG&G 1992a															
			Effluent intake concentration		11.65			Effluent intake concentration		7.70				Effluent intake concentration		0.00

a. -- = no data; BEL = below environmental level; BRB = below reagent blank; EL = environmental (activity concentration) level; LDL = lower detection limit at 95% confidence level; ; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.  
b. Negative 'Min' values included as reported; however, these values should be interpreted as "BEL".

**ATTACHMENT D**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001**  
Page 21 of 38

Table D-20. Mound air-monitoring data for 1992.<sup>a</sup>

Location	HTO incremental concentration (10 <sup>-12</sup> μCi/ml)					<sup>238</sup> Pu concentration (10 <sup>-18</sup> μCi/ml)					--	<sup>239,240</sup> Pu incremental concentration (10 <sup>-18</sup> μCi/ml)						
	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean		Samples	LDL	Min	Max	Mean		
211 On	49	20	BEL	133.14	16.55	12	0.8	3.07	14.99	6.42	12	0.6	BEL	1.16	0.29			
212 On	51	20	BEL	39.62	7.43	12	0.8	0.95	8.04	2.83	12	0.6	BEL	0.67	0.16			
213 On	20	20	BEL	43.21	13.78	5	0.8	12.94	31.78	22.33	5	0.6	0.09	0.78	0.35			
213R On	28	20	BEL	55.20	9.11	7	0.8	3.28	15.76	10.52	7	0.6	BEL	1.34	0.37			
214 On	20	20	BEL	20.24	4.28	5	0.8	1.24	14.17	6.79	5	0.6	BEL	0.55	0.26			
214R On	31	20	BEL	55.24	8.09	7	0.8	2.88	12.51	5.83	7	0.6	BEL	1.48	0.24			
215 On	52	20	BEL	24.15	4.11	12	0.8	0.94	11.34	3.58	12	0.6	BEL	0.64	0.19			
216 On	31	20	BEL	36.21	5.14	7	0.8	0.77	14.53	4.53	7	0.6	BEL	0.41	0.002			
217 On	30	20	BEL	34.02	1.90	7	0.8	0.31	2.73	1.26	7	0.6	BEL	0.24	0.01			
N	312	9	0	9	9	74	9	9	9	9	74	9	1	9	9			
Min		20	BEL	20.24	1.90		0.8	0.31	2.73	1.26		0.6	0.09	0.24	0.00			
Max		20	BEL	133.14	16.55		0.8	12.94	31.78	22.33		0.6	0.09	1.48	0.37			
Median		20	--	39.62	7.43		0.8	1.24	14.17	5.83		0.6	--	0.67	0.24			
Mean		20	--	49.00	7.82		0.8	2.93	13.98	7.12		0.6	--	0.81	0.21			
StdDev		0	--	33.75	4.77		0.0	3.91	7.84	6.30		0.0	--	0.43	0.13			
101 Off	52	20	BEL	43.97	6.57	4	0.5	BEL	0.70	0.32	4	0.04	BEL	0.13	0.05			
102 Off	49	20	BEL	39.71	8.74	4	0.5	0.40	7.84	2.58	4	0.04	0.07	0.11	0.09			
103 Off	50	20	BEL	35.53	4.32	4	0.5	1.05	2.62	1.77	4	0.04	BEL	0.06	BEL			
104 Off	51	20	BEL	40.54	2.86	4	0.5	0.28	1.06	0.53	4	0.04	0.01	0.10	0.06			
105 Off	52	20	BEL	33.89	3.84	4	0.5	BEL	0.58	0.27	4	0.04	BEL	0.08	0.02			
108 Off	52	20	BEL	25.69	0.27	4	0.5	BEL	1.92	0.41	4	0.04	BEL	0.08	0.03			
110 Off	51	20	BEL	34.80	0.07	4	0.5	BEL	1.26	0.24	4	0.04	BEL	0.08	0.03			
111 Off	51	20	BEL	18.01	BEL	4	0.5	BEL	0.72	0.17	4	0.04	BEL	0.03	0.01			
112 Off	52	20	BEL	25.78	BEL	4	0.5	BEL	1.01	0.46	4	0.04	BEL	0.01	BEL			
115 Off	48	20	BEL	17.61	BEL	4	0.5	0.04	0.24	0.12	4	0.04	BEL	0.13	0.03			
118 Off	52	20	BEL	31.80	1.66	4	0.5	0.11	1.67	0.68	4	0.04	BEL	0.04	BEL			
122 Off	51	20	BEL	27.83	3.31	12	0.8	0.37	2.13	0.96	12	0.6	BEL	0.40	0.11			
123 Off	51	20	BEL	45.66	6.33	12	0.8	1.09	4.81	2.55	12	0.6	BEL	1.32	0.17			
124 Off	50	20	BEL	59.39	5.65	12	0.8	0.46	19.67	4.38	12	0.6	BEL	1.36	0.15			
N	712	14	0	14	11	80	14	8	14	14	80	14	2	14	11			
Min		20	BEL	17.61	0.07		0.5	0.04	0.24	0.12		0.04	0.01	0.01	0.01			
Max		20	BEL	59.39	8.74		0.8	1.09	19.67	4.38		0.6	0.07	1.36	0.17			
Median		20	--	34.35	3.84		0.5	0.39	1.47	0.50		0.04	0.04	0.09	0.05			
Mean		20	--	34.30	3.97		0.56	0.48	3.30	1.10		0.16	0.04	0.28	0.07			
StdDev		0	--	11.30	2.72		0.13	0.39	5.13	1.26		0.238	0.0424	0.46	0.05			
EL					6.59					--					0.05			
Reference	EG&G 1993, Bauer 1993																	
	Effluent intake concentration					7.43	Effluent intake concentration					5.83	Effluent intake concentration					0.24

a. -- = no data; BEL = below environmental level; BRB = below reagent blank; EL = environmental (activity concentration) level; LDL = lower detection limit at 95% confidence level; ; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.



**ATTACHMENT D**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001**  
Page 22 of 38

Table D-21. Mound air-monitoring data for 1993.<sup>a</sup>

Location	HTO incremental concentration (10 <sup>-12</sup> µCi/ml)					<sup>238</sup> Pu incremental concentration (10 <sup>-18</sup> µCi/ml)					<sup>239,240</sup> Pu incremental concentration (10 <sup>-18</sup> µCi/ml)							
	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean			
211 On	50	19	BEL	205.40	6.76	12	0.2	2.16	13.11	6.04	12	0.2	BEL	1.78	0.38			
212 On	50	19	BEL	192.47	5.45	12	0.2	1.21	24.57	8.51	12	0.2	BEL	1.82	0.58			
213R On	52	19	BEL	183.54	4.43	12	0.2	10.86	86.49	41.45	12	0.2	0.17	4.18	1.33			
214R On	51	19	BEL	223.44	3.88	12	0.2	1.03	18.54	7.10	12	0.2	BEL	1.12	0.39			
215 On	52	19	BEL	179.96	1.20	12	0.2	1.41	6.60	3.41	12	0.2	BEL	0.96	0.30			
216 On	52	19	BEL	195.66	1.31	12	0.2	2.35	117.49	21.61	12	0.2	0.08	6.60	1.15			
217 On	51	19	BEL	186.20	BEL	12	0.2	0.58	12.93	2.78	12	0.2	BEL	1.26	0.26			
N	358	7	0	7	6	84	7	7	7	7	84	7	2	7	7			
Min		19	BEL	179.96	1.20		0.2	0.58	6.60	2.78		0.2	0.08	0.96	0.26			
Max		19	BEL	223.44	6.76		0.2	10.86	117.49	41.45		0.2	0.17	6.60	1.33			
Median		19	--	192.47	4.16		0.2	1.41	18.54	7.10		0.2	0.13	1.78	0.39			
Mean		19	--	195.24	3.84		0.2	2.80	39.96	12.99		0.2	0.13	2.53	0.63			
StdDev		0	--	15.05	2.23		0.0	3.61	43.66	14.04		0.0	0.06	2.10	0.43			
101 Off	51	19	BEL	188.92	3.38	4	0.06	0.65	24.08	7.01	4	0.08	BEL	0.05	BEL			
102 Off	51	19	BEL	202.45	4.40	4	0.06	1.51	7.63	3.76	4	0.08	0.03	0.30	0.19			
103 Off	50	19	BEL	226.90	1.19	4	0.06	1.66	4.56	3.22	4	0.08	BEL	0.34	0.12			
104 Off	51	19	BEL	201.15	BEL	4	0.06	0.56	6.63	2.19	4	0.08	0.01	0.63	0.19			
105 Off	49	19	BEL	217.19	BEL	4	0.06	0.48	1.76	1.19	3	0.08	BEL	0.18	0.10			
108 Off	51	19	BEL	252.41	BEL	4	0.06	BEL	0.06	BEL	4	0.08	0.03	0.41	0.15			
110 Off	51	19	BEL	210.32	BEL	4	0.06	BEL	0.04	BEL	4	0.08	BEL	0.75	0.14			
111 Off	51	19	BEL	264.65	BEL	4	0.06	0.02	0.48	0.15	4	0.08	BEL	0.06	0.03			
112 Off	50	19	BEL	199.57	BEL	4	0.06	0.06	0.31	0.18	4	0.08	0.03	0.08	0.05			
115 Off	51	19	BEL	218.53	BEL	4	0.06	BEL	0.58	0.11	4	0.08	BEL	0.08	0.03			
118 Off	49	19	BEL	203.49	1.29	4	0.06	0.63	3.28	1.95	4	0.08	BEL	0.38	0.08			
122 Off	51	19	BEL	227.59	1.15	12	0.2	0.29	2.53	1.07	12	0.2	BEL	0.71	0.15			
123 Off	52	19	BEL	545.60	4.82	12	0.2	2.00	12.13	5.90	12	0.2	BEL	0.77	0.24			
124 Off	50	19	BEL	176.27	2.00	12	0.2	0.62	27.55	6.52	12	0.2	BEL	0.51	0.22			
N	708	14	0	14	7	80	14	11	14	12	79	14	4	14	13			
Min		19	BEL	176.27	1.15		0.06	0.02	0.04	0.11		0.08	0.01	0.05	0.03			
Max		19	BEL	545.60	4.82		0.20	2.00	27.55	7.01		0.20	0.03	0.77	0.24			
Median		19	--	213.76	2.00		0.06	0.62	2.91	2.07		0.08	0.03	0.36	0.14			
Mean		19	--	238.22	2.60		0.09	0.77	6.54	2.77		0.11	0.03	0.38	0.13			
StdDev		0	--	91.51	1.58		0.06	0.66	8.90	2.52		0.05	0.01	0.27	0.07			
EL					12.2					0.07					0.09			
Reference	EG&G 1994a																	
	Effluent intake concentration					4.16	Effluent intake concentration					7.10	Effluent intake concentration					0.39

a. -- = no data; BEL = below environmental level; BRB = below reagent blank; EL = environmental (activity concentration) level; LDL = lower detection limit at 95% confidence level; ; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.

**ATTACHMENT D**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001**  
 Page 23 of 38

Table D-22. Mound air-monitoring data for 1994.<sup>a</sup>

Location <sup>b</sup>	HTO incremental concentration (10 <sup>-12</sup> µCi/ml)					<sup>238</sup> Pu incremental concentration (10 <sup>-18</sup> µCi/ml)					<sup>239,240</sup> Pu incremental concentration (10 <sup>-18</sup> µCi/ml)				
	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean
211 On	51	35	BEL	44.27	7.54	12	0.12	2.40	23.56	8.28	12	0.2	BEL	1.31	0.44
211T On	--	--	--	--	--	12	0.12	1.76	15.78	6.63	12	0.2	BEL	1.47	0.34
212 On	50	28	BEL	47.88	4.82	12	0.12	1.85	18.17	7.21	12	0.2	BEL	0.92	0.26
212T On	--	--	--	--	--	12	0.12	3.07	17.16	7.37	12	0.2	BEL	0.73	0.25
213R On	50	28	BEL	24.29	3.55	12	0.12	29.57	1,994.6	354.26	12	0.2	0.06	14.14	3.50
213RT On	--	--	--	--	--	12	0.12	8.64	1,292.2	259.65	12	0.2	0.47	6.71	2.14
214R On	48	28	BEL	30.75	4.29	12	0.12	2.52	11.22	5.55	12	0.2	BEL	1.05	0.32
214RT On	--	--	--	--	--	12	0.12	1.85	11.27	5.50	12	0.2	BEL	1.02	0.30
215 On	48	28	BEL	26.40	3.69	12	0.12	0.20	5.20	2.56	12	0.2	BEL	0.71	0.17
215T On	--	--	--	--	--	12	0.12	0.85	73.19	9.17	12	0.2	BEL	1.76	0.28
216 On	49	28	BEL	23.71	1.97	12	0.12	0.64	30.53	11.27	12	0.2	BEL	1.19	0.42
216T On	--	--	--	--	--	12	0.12	1.05	29.99	8.36	12	0.2	BEL	0.92	0.35
217 On	49	28	BEL	42.48	2.11	12	0.12	0.40	6.89	2.59	12	0.2	BEL	0.84	0.15
217T On	--	--	--	--	--	12	0.12	0.20	21.90	4.28	12	0.2	BEL	0.30	0.10
N	345	7	0	7	7	168	14	14	14	14	168	14	2	14	14
Min		28	BEL	23.71	1.97		0.12	0.2	5.20	2.56		0.2	0.06	0.30	0.10
Max		35	BEL	47.88	7.54		0.12	29.57	1994.60	354.26		0.2	0.47	14.14	3.50
Median		28	--	30.75	3.69		0.12	1.805	20.04	7.29		0.2	0.265	1.04	0.31
Mean		29	--	34.25	4.00		0.12	3.92857	253.69	49.48		0.2	0.265	2.36	0.64
StdDev		2.65	--	10.31	1.88		0	7.68072	604.89	110.68		3E-09	0.2899	3.73	0.96
101 Off	48	23	BEL	61.51	5.96	4	0.03	0.52	1.27	0.81	4	0.05	0.10	0.38	0.19
102 Off	50	23	BEL	28.22	4.90	4	0.03	1.96	6.92	4.42	4	0.05	BEL	0.74	0.32
103 Off	50	23	BEL	26.34	2.14	4	0.03	1.68	7.63	3.60	4	0.05	BEL	0.12	0.04
104 Off	52	23	BEL	26.31	1.98	4	0.03	0.82	3.51	1.85	4	0.05	BEL	0.08	0.03
105 Off	51	23	BEL	25.35	1.25	4	0.03	0.11	0.43	0.32	4	0.05	BEL	0.05	0.01
108 Off	50	23	BEL	34.27	0.74	4	0.03	BEL	2.10	0.60	4	0.05	0.03	0.95	0.28
110 Off	50	23	BEL	23.85	0.52	4	0.03	BEL	0.34	0.07	4	0.05	BEL	0.13	0.05
111 Off	48	23	BEL	29.03	BEL	4	0.03	0.11	0.20	0.16	4	0.05	BEL	0.60	0.18
112 Off	50	23	BEL	36.66	2.09	4	0.03	0.16	0.39	0.26	4	0.05	BEL	0.15	0.04
115 Off	51	23	BEL	28.99	0.75	4	0.03	0.05	0.14	0.10	4	0.05	BEL	0.16	0.05
118 Off	48	23	BEL	28.98	0.75	4	0.03	0.66	1.10	0.86	4	0.05	BEL	0.26	0.06
122 Off	51	23	BEL	35.15	3.37	12	0.12	0.32	2.20	1.37	12	0.2	BEL	0.32	0.11
123 Off	50	23	BEL	33.36	5.65	12	0.12	1.48	8.40	4.12	12	0.2	BEL	0.83	0.21
124 Off	50	23	BEL	40.51	8.09	12	0.12	2.44	47.32	13.19	12	0.2	BEL	1.61	0.44
N	699	14	0	14	13	80	14	12	14	14	80	14	2	14	14
Min		23	BEL	23.85	0.52		0.03	0.05	0.14	0.07		0.05	0.03	0.05	0.01
Max		23	BEL	61.51	8.09		0.12	2.44	47.32	13.19		0.20	0.10	1.61	0.44
Median		23	--	29.01	2.09		0.03	0.59	1.69	0.84		0.05	0.07	0.29	0.09
Mean		23	--	32.75	2.94		0.05	0.86	5.85	2.27		0.08	0.07	0.46	0.14
StdDev		0	--	9.57	2.46		0.04	0.82	12.28	3.50		0.06	0.05	0.45	0.13
EL					3.22					0.05					0.07
Reference	EG&G 1995b														
				Effluent intake concentration	3.69				Effluent intake concentration	7.29				Effluent intake concentration	0.31

a. -- = no data; BEL = below environmental level; BRB = below reagent blank; EL = environmental (activity concentration) level; LDL = lower detection limit at 95% confidence level; ; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.  
 b. T indicates 2-m sampling height.

**ATTACHMENT D**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001**  
Page 24 of 38

Table D-23. Mound air-monitoring data for 1995.<sup>a</sup>

Location <sup>b</sup>	HTO incremental concentration (10 <sup>-12</sup> µCi/ml)					<sup>238</sup> Pu incremental concentration (10 <sup>-18</sup> µCi/ml)					<sup>239,240</sup> Pu incremental concentration (10 <sup>-18</sup> µCi/ml)							
	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean			
211 On	52	26	BEL	25.08	3.35	12	0.86	2.49	35.96	9.88	12	0.6	BEL	0.75	0.16			
211T On	--	--	--	--	--	12	0.86	1.11	37.39	8.68	12	0.6	BEL	0.47	0.01			
212 On	51	23	BEL	20.27	2.70	12	0.86	0.90	11.42	4.95	12	0.6	BEL	1.08	0.03			
212T On	--	--	--	--	--	12	0.86	BEL	13.22	3.21	12	0.6	BEL	0.71	0.03			
213R On	50	23	BEL	21.36	2.11	12	0.86	17.04	2,430.5	326.87	12	0.6	BEL	7.15	0.97			
213RT On	--	--	--	--	--	12	0.86	14.36	1,881.1	264.60	12	0.6	BEL	6.86	1.58			
214R On	50	23	BEL	20.20	2.38	12	0.86	1.53	27.15	6.57	12	0.6	BEL	3.61	0.45			
214RT On	--	--	--	--	--	12	0.86	0.31	7.75	4.54	12	0.6	BEL	0.73	0.08			
215 On	52	23	BEL	20.85	0.83	12	0.86	BEL	49.38	5.40	12	0.6	BEL	1.04	0.04			
215T On	--	--	--	--	--	12	0.86	BEL	5.6	2.26	12	0.6	BEL	0.38	BEL			
216 On	52	23	BEL	18.38	0.43	12	0.86	BEL	69.95	15.33	12	0.6	BEL	2.77	0.37			
216T On	--	--	--	--	--	12	0.86	BEL	107.41	13.50	12	0.6	BEL	1.08	BEL			
217 On	49	23	BEL	15.28	0.42	12	0.86	BEL	7.59	1.95	12	0.6	BEL	0.80	BEL			
217T On	--	--	--	--	--	12	0.86	BEL	9.80	1.64	12	0.6	BEL	0.34	BEL			
N	356	7	0	7	7	168	14	7	14	14	168	14	0	14	10			
Min		23	BEL	15.28	0.42		0.86	0.31	5.60	1.64		0.6	BEL	0.34	0.01			
Max		26	BEL	25.08	3.35		0.86	17.04	2430.50	326.87		0.6	BEL	7.15	1.58			
Median		23	--	20.27	2.11		0.86	1.53	31.56	5.99		0.6	--	0.92	0.12			
Mean		23.4	--	20.20	1.75		0.86	5.39	335.30	47.81		0.6	--	1.98	0.37			
StdDev		1.1	--	2.98	1.18		0.00	7.12	779.29	105.82		0.0	--	2.32	0.52			
101 Off	53	18	BEL	24.87	2.83	4	0.07	0.16	0.74	0.40	4	0.1	BEL	0.13	0.01			
102 Off	50	18	BEL	23.35	2.37	4	0.07	1.55	4.07	2.28	4	0.1	BEL	0.37	0.13			
103 Off	52	18	BEL	17.80	0.69	4	0.07	0.61	5.31	2.48	4	0.1	BEL	0.30	0.12			
104 Off	53	18	BEL	22.00	0.50	4	0.07	0.05	0.73	0.45	4	0.1	BEL	0.68	0.23			
105 Off	51	18	BEL	19.13	1.01	4	0.07	0.06	11.36	3.37	4	0.1	BEL	0.39	0.16			
108 Off	53	18	BEL	23.16	BEL	4	0.07	BEL	0.20	0.03	4	0.1	BEL	0.16	BEL			
110 Off	50	18	BEL	9.13	BEL	4	0.07	BEL	0.16	0.04	4	0.1	0.01	0.16	0.09			
111 Off	53	18	BEL	16.45	BEL	4	0.07	BEL	0.11	0.03	4	0.1	BEL	0.05	BEL			
112 Off	51	18	BEL	22.01	BEL	4	0.07	BEL	2.19	0.72	4	0.1	BEL	0.23	0.07			
115 Off	50	18	BEL	13.66	BEL	4	0.07	0.05	0.35	0.20	4	0.1	BEL	0.24	0.11			
118 Off	53	18	BEL	23.88	1.00	4	0.07	0.12	3.20	1.51	4	0.1	BEL	0.18	0.02			
122 Off	34	18	BEL	21.69	0.20	9	0.86	BEL	6.79	1.26	9	0.6	BEL	1.12	BEL			
123 Off	52	18	BEL	23.62	3.57	12	0.86	0.35	6.77	2.82	12	0.6	BEL	0.44	BEL			
124 Off	50	18	BEL	40.05	4.27	12	0.86	0.46	20.46	6.19	12	0.6	BEL	1.41	0.16			
N	705	14	0	14	9	77	14	9	14	14	77	14	1	14	10			
Min		18	BEL	9.13	0.20		0.07	0.05	0.11	0.03		0.1	0.01	0.05	0.01			
Max		18	BEL	40.05	4.27		0.86	1.55	20.46	6.19		0.6	0.01	1.41	0.23			
Median		18	--	22.01	1.01		0.07	0.16	2.70	0.99		0.1	--	0.27	0.12			
Mean		18	--	21.49	1.83		0.24	0.38	4.46	1.56		0.2	--	0.42	0.11			
StdDev		0	--	6.97	1.47		0.34	0.48	5.70	1.75		0.2	--	0.40	0.07			
EL				BEL	4.61				BEL	0.04				BEL	0.04			
Reference	EG&G 1996																	
	Effluent intake concentration					2.11	Effluent intake concentration					5.99	Effluent intake concentration					0.12

a. -- = no data; BEL = below environmental level; BRB = below reagent blank; LDL = lower detection limit at 95% confidence level; ; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.  
b. T indicates 2-m sampling height.

**ATTACHMENT D**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001**  
Page 25 of 38

Table D-24. Mound air-monitoring data for 1996.<sup>a</sup>

Location <sup>b</sup>	HTO incremental concentration (10 <sup>-12</sup> µCi/ml)					<sup>238</sup> Pu incremental concentration (10 <sup>-18</sup> µCi/ml)					<sup>239,240</sup> Pu incremental concentration (10 <sup>-18</sup> µCi/ml)				
	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean
211 On	52	35	BEL	32.51	9.43	12	0.5	2.34	13.28	5.42	12	0.4	BEL	0.52	BEL
211T On	--	--	--	--	--	12	0.5	1.50	12.68	4.27	12	0.4	BEL	0.62	BEL
212 On	51	30	BEL	114.80	9.12	12	0.5	1.37	20.01	5.76	12	0.4	BEL	1.00	0.001
212T On	--	--	--	--	--	12	0.5	0.78	10.42	4.05	12	0.4	BEL	0.12	BEL
213R On	50	30	BEL	50.07	9.16	12	0.5	33.35	216.55	89.12	12	0.4	BEL	1.46	0.18
213RT On	--	--	--	--	--	12	0.5	17.08	205.52	65.86	12	0.4	BEL	0.71	0.04
214R On	50	30	BEL	25.45	6.94	12	0.5	1.12	65.17	17.12	12	0.4	BEL	19.16	1.49
214RT On	--	--	--	--	--	12	0.5	1.81	95.57	20.59	12	0.4	BEL	3.90	0.35
215 On	52	30	BEL	20.26	5.55	12	0.5	1.06	124.83	27.64	12	0.4	BEL	0.29	0.01
215T On	--	--	--	--	--	12	0.5	1.25	236.86	51.59	12	0.4	BEL	1.46	0.18
216 On	52	30	BEL	27.29	5.77	12	0.5	1.04	13.70	5.03	12	0.4	BEL	1.18	0.08
216T On	--	--	--	--	--	12	0.5	1.18	13.99	6.12	12	0.4	BEL	0.21	BEL
217 On	49	30	BEL	23.62	4.89	12	0.5	0.18	4.51	1.43	12	0.4	BEL	0.38	BEL
217T On	--	--	--	--	--	12	0.5	0.34	6.19	1.69	12	0.4	BEL	1.35	0.01
N	356	7	0	7	7	168	14	14	14	14	168	14	0	14	9
Min		30	BEL	20.26	4.89		0.5	0.18	4.51	1.43		0.4	BEL	0.12	0.00
Max		35	BEL	114.80	9.43		0.5	33.35	236.86	89.12		0.4	BEL	19.16	1.49
Median		30	--	27.29	6.94		0.5	1.22	17.00	5.94		0.4	--	0.86	0.08
Mean		30.7	--	42.00	7.27		0.5	4.60	74.23	21.84		0.4	--	2.31	0.26
StdDev		1.9	--	33.56	1.94		0.0	9.31	86.97	27.61		0.0	--	4.94	0.48
101 Off	49	23	BEL	41.76	5.09	4	0.4	0.03	0.38	0.25	4	0.2	BEL	1.71	0.62
102 Off	52	23	BEL	129.01	9.45	4	0.4	0.64	18.58	5.86	4	0.2	BEL	1.48	0.47
103 Off	52	23	BEL	41.84	4.73	4	0.4	1.13	3.87	2.32	4	0.2	BEL	0.07	BEL
104 Off	52	23	BEL	23.05	4.44	4	0.4	0.33	2.79	1.22	4	0.2	BEL	0.28	0.01
105 Off	51	23	BEL	24.41	6.02	4	0.4	0.00	0.37	0.19	4	0.2	BEL	0.15	BEL
	51	23	BEL	17.42	1.75	4	0.4	BEL	0.07	BEL	4	0.2	BEL	0.60	0.07
	52	23	BEL	19.69	0.80	4	0.4	BEL	0.35	0.06	4	0.2	BEL	0.27	0.04
108 Off	52	23	BEL	22.61	0.99	4	0.4	BEL	0.24	0.12	4	0.2	BEL	BEL	BEL
110 Off	52	23	BEL	22.97	2.07	4	0.4	BEL	0.29	0.13	4	0.2	BEL	0.80	0.03
111 Off	52	23	BEL	16.73	1.62	4	0.4	BEL	0.06	BEL	4	0.2	BEL	0.56	0.13
112 Off	52	23	BEL	18.43	3.16	4	0.4	0.04	3.22	1.18	4	0.2	BEL	0.66	0.22
115 Off	51	23	BEL	23.22	3.81	12	0.5	0.09	3.70	1.07	12	0.4	BEL	BEL	BEL
118 Off	52	23	BEL	24.33	6.82	12	0.5	1.10	45.95	14.83	12	0.4	BEL	1.61	0.11
122 Off	50	23	BEL	33.85	5.69	12	0.5	0.89	24.40	6.45	12	0.4	BEL	1.52	BEL

**ATTACHMENT D**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001**  
 Page 26 of 38

Location <sup>b</sup>	HTO incremental concentration (10 <sup>-12</sup> μCi/ml)					<sup>238</sup> Pu incremental concentration (10 <sup>-18</sup> μCi/ml)					<sup>239,240</sup> Pu incremental concentration (10 <sup>-18</sup> μCi/ml)							
	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean			
123 Off	11	23	BEL	17.16	3.86	3	0.4	0.92	4.34	2.26	3	0.2	BEL	BEL	BEL			
124 Off	11	23	BEL	15.83	4.17	3	0.4	1.62	8.27	3.91	3	0.2	BEL	BEL	BEL			
N	742	16	0	16	16	86	16	11	16	14	86	16	0	12	9			
Min		23	BEL	15.83	0.80		0.4	0.00	0.06	0.06		0.2	BEL	0.07	0.01			
Max		23	BEL	129.01	9.45		0.5	1.62	45.95	14.83		0.4	BEL	1.71	0.62			
Median		23	--	23.01	4.02		0.4	0.64	3.01	1.20		0.2	--	0.63	0.11			
Mean		23	--	30.77	4.03		0.42	0.62	7.31	2.85		0.24	--	0.81	0.19			
StdDev		0	--	27.43	2.32		0.04	0.56	12.47	4.04		0.08	--	0.61	0.21			
EL					4.64					--					0.25			
Reference	EG&G 1997																	
	Effluent intake concentration					6.94	Effluent intake concentration					5.94	Effluent intake concentration					0.08

a. -- = no data; BEL = below environmental level; BRB = below reagent blank; EL = environmental (activity concentration) level; LDL = lower detection limit at 95% confidence level; ; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.

b. T indicates 2-m sampling height.

**ATTACHMENT D**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001**  
Page 27 of 38

Table D-25. Mound air-monitoring data for 1997.<sup>a</sup>

Location <sup>b</sup>	HTO incremental concentration (10 <sup>-12</sup> μCi/ml)					<sup>238</sup> Pu incremental concentration (10 <sup>-18</sup> μCi/ml)					<sup>239,240</sup> Pu incremental concentration (10 <sup>-18</sup> μCi/ml)							
	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean			
211 On	49	35	BEL	27.08	9.04	12	0.5	2.17	33.50	9.31	12	0.3	BEL	0.20	BEL			
212 On	53	31	BEL	80.13	11.80	12	0.5	1.25	5.19	3.02	12	0.3	BEL	BEL	BEL			
213 On	53	31	BEL	39.75	9.93	12	0.5	2.89	141.76	33.35	12	0.3	BEL	0.85	BEL			
214 On	53	31	BEL	35.32	7.19	12	0.5	5.85	56.08	31.89	12	0.3	BEL	0.10	BEL			
215 On	32	31	BEL	26.76	6.30	9	0.5	22.54	81.56	44.66	9	0.3	BEL	0.33	BEL			
215T On	--	--	--	--	--	9	0.5	41.38	98.76	57.70	8	0.3	BEL	0.25	BEL			
216 On	53	31	BEL	18.24	5.77	12	0.5	1.58	9.87	3.54	12	0.3	BEL	BEL	BEL			
217 On	49	31	BEL	18.92	1.97	12	0.5	0.12	1.93	0.80	12	0.3	BEL	0.31	BEL			
N	342	7	0	7	7	90	8	8	8	8	89	8	0	6	0			
Min		31	BEL	18.24	1.97		0.5	0.12	1.93	0.80		0.3	BEL	0.10	BEL			
Max		35	BEL	80.13	11.80		0.5	41.38	141.76	57.70		0.3	BEL	0.85	BEL			
Median		31	--	27.08	7.19		0.5	2.53	44.79	20.60		0.3	--	0.28	--			
Mean		31.6	--	35.17	7.43		0.5	9.7225	53.58	23.03		0.3	--	0.34	--			
StdDev		1.5	--	21.33	3.21		0.0	14.7	50.61	21.77		0.0	--	0.26	--			
101 Off	51	22	BEL	40.64	3.08	4	0.2	0.26	0.60	0.44	4	0.1	BEL	BEL	BEL			
102 Off	52	22	BEL	51.14	6.51	4	0.2	1.00	6.69	3.26	4	0.1	BEL	1.31	BEL			
103 Off	52	22	BEL	59.79	4.93	4	0.2	0.76	2.26	1.38	4	0.1	BEL	BEL	BEL			
104 Off	52	22	BEL	26.96	2.93	12	0.5	0.09	2.27	0.75	4	0.1	BEL	0.09	BEL			
105 Off	49	22	BEL	43.57	3.44	4	0.2	0.27	0.83	0.45	4	0.1	BEL	0.45	0.14			
111 Off	51	22	BEL	37.57	2.04	4	0.2	BEL	0.18	0.50	4	0.1	BEL	1.27	0.06			
112 Off	52	22	BEL	24.08	1.03	4	0.2	0.22	0.51	0.37	4	0.1	BEL	BEL	BEL			
115 Off	49	22	BEL	22.99	0.13	4	0.2	BEL	0.84	0.15	4	0.1	BEL	BEL	BEL			
118 Off	52	22	BEL	39.67	1.92	4	0.2	0.12	0.44	0.27	4	0.1	BEL	0.79	BEL			
122 Off	51	22	BEL	30.73	4.03	12	0.5	BEL	19.58	4.33	12	0.3	BEL	1.67	BEL			
123 Off	51	22	BEL	41.64	6.11	12	0.5	6.37	318.17	65.59	12	0.3	BEL	0.65	BEL			
124 Off	50	22	BEL	41.56	8.58	12	0.5	1.02	9.33	3.98	12	0.3	BEL	0.09	BEL			
CLN Off	52	22	BEL	27.25	2.02	12	0.5	0.66	44.34	14.26	12	0.3	BEL	0.58	BEL			
CLS Off	50	22	BEL	31.15	3.65	12	0.5	1.65	28.30	11.92	12	0.3	BEL	0.22	BEL			
N	714	14	0	14	14	104	14	11	14	14	96	14	0	10	2			
Min		22	BEL	22.99	0.13		0.2	0.09	0.18	0.15		0.1	BEL	0.09	0.06			
Max		22	BEL	59.79	8.58		0.5	6.37	318.17	65.59		0.3	BEL	1.67	0.14			
Median		22	--	38.62	3.26		0.2	0.66	2.27	1.07		0.1	--	0.62	0.10			
Mean		22	--	37.05	3.60		0.33	1.13	31.02	7.69		0.17	--	0.71	0.10			
StdDev		0	--	10.59	2.30		0.15	1.80	83.69	17.25		0.10	--	0.55	0.06			
EL					5.74					0.06					0.43			
Reference	BWXT 1998																	
	Effluent intake concentration					7.19	Effluent intake concentration					20.60	Effluent intake concentration					0.00



**ATTACHMENT D**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001**  
Page 29 of 38

Table D-26. Mound air-monitoring data for 1998.<sup>a</sup>

Location <sup>b</sup>	HTO incremental concentration (10 <sup>-12</sup> µCi/ml)					<sup>238</sup> Pu incremental concentration (10 <sup>-18</sup> µCi/ml)					<sup>239,240</sup> Pu incremental concentration (10 <sup>-18</sup> µCi/ml)												
	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean								
211 On	51	33	BEL	38.17	12.72	12	1.0	BEL	7.13	1.69	12	0.5	BEL	5.93	0.07								
212 On	51	30	BEL	64.83	13.44	12	1.0	BEL	1.66	BEL	12	0.5	BEL	BEL	BEL								
213 On	51	30	BEL	37.93	9.93	12	1.0	BEL	13.33	5.38	12	0.5	BEL	0.97	BEL								
214 On	51	30	BEL	31.19	10.19	12	1.0	BEL	24.22	7.60	12	0.5	BEL	0.14	BEL								
215 On	52	30	BEL	40.71	10.38	12	1.0	BEL	15.65	4.84	9	0.5	BEL	0.06	BEL								
215T On	--	--	--	--	--	12	1.0	BEL	20.83	5.69	8	0.5	BEL	0.76	BEL								
216 On	49	30	BEL	27.28	7.95	12	1.0	BEL	12.28	0.06	12	0.5	BEL	0.16	BEL								
217 On	50	30	BEL	30.34	6.69	12	1.0	BEL	BEL	BEL	12	0.5	BEL	0.04	BEL								
218 On	24	30	BEL	44.72	8.45	6	1.0	BEL	1.72	BEL	6	0.5	BEL	0.31	BEL								
N	379	8	0	8	8	102	9	0	8	6	95	9	0	8	1								
Min		30	BEL	27.28	6.69		1	BEL	1.66	0.06		0.5	BEL	0.04	0.07								
Max		33	BEL	64.83	13.44		1	BEL	24.22	7.60		0.5	BEL	5.93	0.07								
Median		30	--	38.05	10.06		1	--	12.81	5.11		0.5	--	0.24	--								
Mean		30.4	--	39.40	9.97		1	--	12.10	4.21		0.5	--	1.05	--								
StdDev		1.1	--	11.81	2.30		0.0	--	8.27	2.79		0.0	--	2.00	--								
101 Off	51	28	BEL	61.37	8.09	4	0.2	BEL	15.60	1.53	4	0.2	BEL	BEL	BEL								
102 Off	51	28	BEL	89.10	11.57	4	0.2	BEL	14.00	2.34	4	0.2	BEL	BEL	BEL								
103 Off	50	28	BEL	41.06	6.96	4	0.2	BEL	11.30	1.44	4	0.2	BEL	BEL	BEL								
104 Off	51	28	BEL	36.58	8.53	12	1.0	BEL	0.11	BEL	12	0.5	BEL	3.10	BEL								
105 Off	51	28	BEL	42.56	4.12	4	0.2	BEL	13.68	1.60	4	0.2	BEL	BEL	BEL								
111 Off	51	28	BEL	31.25	2.08	4	0.2	BEL	19.27	2.76	4	0.2	BEL	BEL	BEL								
112 Off	51	28	BEL	25.85	5.32	4	0.2	BEL	14.98	1.87	4	0.2	BEL	BEL	BEL								
115 Off	49	28	BEL	28.88	4.65	4	0.2	BEL	9.22	0.20	4	0.2	BEL	BEL	BEL								
118 Off	51	28	BEL	37.41	5.91	4	0.2	BEL	13.64	1.18	4	0.2	BEL	BEL	BEL								
122 Off	19	28	BEL	20.64	3.23	5	1.0	BEL	24.35	5.73	5	0.5	BEL	BEL	BEL								
123 Off	9	28	BEL	10.00	3.87	3	0.2	2.96	21.93	9.36	3	0.5	BEL	BEL	BEL								
124 Off	51	28	BEL	47.12	11.36	12	1.0	BEL	2.10	BEL	12	0.5	BEL	0.01	BEL								
CLN Off	39	28	BEL	57.13	5.60	11	1.0	BEL	16.15	2.30	11	0.5	BEL	BEL	BEL								
CLS Off	21	28	BEL	35.09	7.64	5	1.0	1.21	40.62	11.15	5	0.5	BEL	0.58	BEL								
N	595	14	0	14	14	80	14	2	14	12	80	14	0	3	0								
Min		28	BEL	10.00	2.08		0.2	1.21	0.11	0.20		0.2	BEL	0.01	BEL								
Max		28	BEL	89.10	11.57		1.0	2.96	40.62	11.15		0.5	BEL	3.10	BEL								
Median		28	--	37.00	5.76		0.2	2.09	14.49	2.09		0.2	--	0.58	--								
Mean		28	--	40.29	6.35		0.49	2.09	15.50	3.46		0.329	--	1.23	--								
StdDev		0	--	19.49	2.85		0.40	1.24	9.80	3.46		0.154	--	1.64	--								
EL				BEL	3.68				BEL	3.33				BEL	0.62								
Reference	BWXT 1999					Effluent intake concentration					10.06	Effluent intake concentration					5.11	Effluent intake concentration					0.07



**ATTACHMENT D**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001**  
 Page 30 of 38

Location <sup>b</sup>	<sup>228</sup> Th incremental concentration (10 <sup>-18</sup> μCi/ml)					<sup>230</sup> Th incremental concentration (10 <sup>-18</sup> μCi/ml)					<sup>232</sup> Th incremental concentration (10 <sup>-18</sup> μCi/ml)							
	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean			
213 On	12	0.6	BEL	3.20	BEL	12	0.9	BEL	3.29	BEL	12	0.6	BEL	6.50	0.40			
215T On	12	0.6	BEL	3.22	BEL	12	0.9	BEL	4.01	BEL	12	0.6	BEL	4.75	0.14			
216 On	12	0.6	BEL	1.22	BEL	12	0.9	BEL	6.43	BEL	12	0.6	BEL	2.65	0.18			
218 On	6	0.6	BEL	1.33	BEL	6	0.9	BEL	1.71	BEL	6	0.6	BEL	3.53	BEL			
N	42	4	0	4	0	42	4	0	4	0	42	4	0	4	3			
Min		0.6	BEL	1.22	BEL		0.9	BEL	1.71	BEL		0.6	BEL	2.65	0.14			
Max		0.6	BEL	3.22	BEL		0.9	BEL	6.43	BEL		0.6	BEL	6.50	0.40			
Median		0.6	--	2.27	--		0.9	--	3.65	--		0.6	--	4.14	0.18			
Mean		0.6	--	2.24	--		0.9	--	3.86	--		0.6	--	4.36	0.24			
StdDev		0.0	--	1.12	--		0.0	--	1.96	--		0.0	--	1.67	0.14			
124 Off	12	0.6	BEL	5.57	BEL	12	0.9	BEL	9.29	BEL	12	0.6	BEL	4.06	0.44			
N	12	1	0	1	0	12	1	0	1	0	12	1	0	1	1			
Min		0.6	BEL	5.57	BEL		0.9	BEL	9.29	BEL		0.6	BEL	4.06	0.44			
Max		0.6	BEL	5.57	BEL		0.9	BEL	9.29	BEL		0.6	BEL	4.06	0.44			
Median		--	--	--	--		--	--	--	--		--	--	--	--			
Mean		--	--	--	--		--	--	--	--		--	--	--	--			
StdDev		--	--	--	--		--	--	--	--		--	--	--	--			
EL					7.64					8.11					5.58			
	Effluent intake concentration					0.00	Effluent intake concentration					0.00	Effluent intake concentration					0.18

- a. -- = no data; BEL = below environmental level; BRB = below reagent blank; EL = environmental (activity concentration) level; LDL = lower detection limit at 95% confidence level; ; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.
- b. T indicates 2-m sampling height.

**ATTACHMENT D**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001**  
Page 31 of 38

Table D-27. Mound air-monitoring data for 1999.<sup>a</sup>

Location <sup>d</sup>	HTO incremental concentration (10 <sup>-12</sup> μCi/ml)					<sup>238</sup> Pu incremental concentration (10 <sup>-18</sup> μCi/ml)					<sup>239,240</sup> Pu incremental concentration (10 <sup>-18</sup> μCi/ml)												
	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean								
211 On	51	35	BEL	38.75	10.67	12	0.7	BEL	0.30	BEL	12	0.6	BEL	3.09	0.13								
212 On	36	31	BEL	98.41	19.86	8	0.7	BEL	BEL	BEL	8	0.6	BEL	0.32	BEL								
213 On	50	31	BEL	56.60	9.91	12	0.7	BEL	9.49	1.30	12	0.6	BEL	1.52	0.24								
214 On	51	31	BEL	34.47	8.12	12	0.7	BEL	5.53	BEL	12	0.6	BEL	0.78	BEL								
215 On	48	31	BEL	33.21	8.80	12	0.7	BEL	0.79	BEL	12	0.6	BEL	0.93	BEL								
215T On	--	--	--	--	--	12	0.7	BEL	2.66	BEL	12	0.6	BEL	1.17	BEL								
216 On	49	31	BEL	29.82	7.01	12	0.7	BEL	12.08	BEL	12	0.6	BEL	0.68	0.08								
217 On	51	31	BEL	61.29	5.95	10	0.7	BEL	BEL	BEL	10	0.6	BEL	0.92	BEL								
218 On	51	31	BEL	41.63	5.12	12	0.7	BEL	37.92	1.56	12	0.6	BEL	1.16	0.16								
N	387	8	0	8	8	102	9	0	7	2	102	9	0	9	4								
Min		31	BEL	29.82	5.12		0.7	BEL	0.30	1.30		0.6	BEL	0.32	0.08								
Max		35	BEL	98.41	19.86		0.7	BEL	37.92	1.56		0.6	BEL	3.09	0.24								
Median		31	--	40.19	8.45		0.7	--	5.53	1.43		0.6	--	0.93	0.15								
Mean		31.5	--	49.27	9.43		0.7	--	9.82	1.43		0.6	--	1.17	0.15								
StdDev		1.4	--	22.79	4.62		0.0	--	13.14	0.18		0.0	--	0.79	0.07								
101 Off	50	47	BEL	26.12	4.10	4	0.1	BEL	2.41	BEL	4	0.1	BEL	0.02	BEL								
102 Off	48	47	BEL	44.26	7.46	4	0.1	BEL	10.52	2.83	4	0.1	BEL	0.32	BEL								
103 Off	49	47	BEL	72.32	3.98	4	0.1	BEL	8.34	0.02	4	0.1	BEL	BEL	BEL								
104 Off	50	47	BEL	35.52	3.21	12	0.7	BEL	BEL	BEL	12	0.6	BEL	0.80	0.01								
105 Off	50	47	BEL	27.73	2.61	4	0.1	BEL	10.34	BEL	4	0.1	BEL	BEL	BEL								
111 Off	47	47	BEL	21.86	0.42	4	0.1	BEL	10.34	BEL	4	0.1	BEL	BEL	BEL								
112 Off	48	47	BEL	25.74	3.45	3	0.1	BEL	3.47	BEL	3	0.1	BEL	BEL	BEL								
115 Off	49	47	BEL	20.43	BEL	4	0.1	BEL	12.91	0.37	4	0.1	BEL	BEL	BEL								
118 Off	44	47	BEL	28.55	1.07	4	0.1	BEL	9.11	BEL	4	0.1	BEL	0.91	0.01								
124 Off	49	47	BEL	51.50	7.73	12	0.7	BEL	BEL	BEL	12	0.6	BEL	0.91	BEL								
CLN Off	50	47	BEL	22.78	3.05	11	0.7	BEL	BEL	BEL	12	0.6	BEL	1.54	BEL								
N	534	11	0	11	10	66	11	0	8	3	67	11	0	6	2								
Min		47	BEL	20.43	0.42		0.1	BEL	2.41	0.02		0.1	BEL	0.02	0.01								
Max		47	BEL	72.32	7.73		0.7	BEL	12.91	2.83		0.6	BEL	1.54	0.01								
Median		47	--	27.73	3.33		0.1	--	9.73	0.37		0.1	--	0.86	0.01								
Mean		47	--	34.26	3.71		0.26	--	8.43	1.07		0.2	--	0.75	0.01								
StdDev		0	--	15.93	2.36		0.28	--	3.65	1.53		0.2	--	0.53	0.00								
EL					4.02					6.6					0.64								
Reference	BWXT 2000					Effluent intake concentration					8.45	Effluent intake concentration					1.43	Effluent intake concentration					0.15

**ATTACHMENT D**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001**  
 Page 32 of 38

Location <sup>b</sup>	<sup>228</sup> Th incremental concentration (10 <sup>-18</sup> μCi/ml)					<sup>230</sup> Th incremental concentration (10 <sup>-18</sup> μCi/ml)					<sup>232</sup> Th incremental concentration (10 <sup>-18</sup> μCi/ml)							
	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean			
213 On	12	0.6	BEL	14.78	5.55	12	1.1	BEL	21.88	5.79	12	0.5	BEL	13.25	4.62			
215T On	12	0.6	BEL	10.64	4.02	12	1.1	BEL	13.37	3.82	12	0.5	BEL	28.99	4.96			
216 On	12	0.6	BEL	18.52	5.18	12	1.1	BEL	23.17	5.00	12	0.5	BEL	17.40	4.22			
218 On	12	0.6	BEL	19.56	3.02	12	1.1	BEL	17.7	1.98	12	0.5	BEL	20.77	2.0			
N	48	4	0	4	4	48	4	0	4	4	48	4	0	4	4			
Min		0.6	BEL	10.64	3.02		1.1	BEL	13.37	1.98		0.5	BEL	13.25	2.00			
Max		0.6	BEL	19.56	5.55		1.1	BEL	23.17	5.79		0.5	BEL	28.99	4.96			
Median		0.6	--	16.65	4.60		1.1	--	19.79	4.41		0.5	--	19.09	4.42			
Mean		0.6	--	15.88	4.44		1.1	--	19.03	4.15		0.5	--	20.10	3.95			
StdDev		0.0	--	4.05	1.15		0.0	--	4.44	1.66		0.0	--	6.68	1.33			
124 Off	12	0.6	BEL	13.72	3.22	12	1.3	BEL	13.72	3.22	12	0.5	BEL	20.77	2.0			
N	12	1	0	1	1	12	1	0	1	1	12	1	0	1	1			
Min		0.6	BEL	13.72	3.22		1.3	BEL	13.72	3.22		0.5	BEL	20.77	2.00			
Max		0.6	BEL	13.72	3.22		1.3	BEL	13.72	3.22		0.5	BEL	20.77	2.00			
Median		--	--	--	--		--	--	--	--		--	--	--	--			
Mean		--	--	--	--		--	--	--	--		--	--	--	--			
StdDev		--	--	--	--		--	--	--	--		--	--	--	--			
EL					5.46					6.44					4.78			
	Effluent intake concentration					4.60	Effluent intake concentration					4.41	Effluent intake concentration					4.42

a. -- = no data; BEL = below environmental level; BRB = below reagent blank; EL = environmental (activity concentration) level; LDL = lower detection limit at 95% confidence level; ; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.  
 b. T indicates 2-m sampling height.

**ATTACHMENT D**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001**  
Page 33 of 38

Table D-28. Mound air-monitoring data for 2000.<sup>a</sup>

Location <sup>d</sup>	HTO incremental concentration (10 <sup>-12</sup> μCi/ml)					<sup>238</sup> Pu incremental concentration (10 <sup>-18</sup> μCi/ml)					<sup>239,240</sup> Pu incremental concentration (10 <sup>-18</sup> μCi/ml)												
	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean								
211 On	48	26	BEL	43.02	2.95	12	0.5	0.47	108.03	11.09	12	0.4	BEL	0.66	BEL								
212 On	41	23	BEL	20.26	4.42	11	0.5	0.43	4.22	1.42	11	0.4	BEL	3.05	0.17								
213 On	49	23	BEL	27.22	3.51	12	0.5	3.98	15.54	7.99	12	0.4	BEL	0.38	BEL								
214 On	48	23	BEL	28.67	2.00	12	0.5	0.14	7.18	1.74	12	0.4	BEL	0.27	BEL								
215 On	50	23	BEL	19.97	2.49	11	0.5	0.27	8.87	3.00	11	0.4	BEL	BEL	BEL								
215T On	--	--	--	--	--	12	0.5	0.17	16.51	4.08	12	0.4	BEL	0.87	BEL								
216 On	49	23	BEL	40.15	2.06	12	0.5	1.03	11.61	4.11	12	0.4	BEL	0.75	BEL								
217 On	50	23	BEL	23.53	0.96	12	0.5	BEL	1.02	0.33	12	0.4	BEL	1.32	BEL								
218 On	51	23	BEL	33.26	0.93	12	0.5	0.24	42.22	5.81	12	0.4	BEL	0.96	BEL								
N	386	8	0	8	8	106	9	8	9	9	106	9	0	8	1								
Min		23	BEL	19.97	0.93		0.5	0.14	1.02	0.33		0.4	BEL	0.27	0.17								
Max		26	BEL	43.02	4.42		0.5	3.98	108.03	11.09		0.4	BEL	3.05	0.17								
Median		23	--	27.95	2.28		0.5	0.35	11.61	4.08		0.4	--	0.81	--								
Mean		23.4	--	29.51	2.42		0.5	0.84	23.91	4.40		0.4	--	1.03	--								
StdDev		1.1	--	8.69	1.20		0.0	1.3	33.74	3.43		0.0	--	0.88	--								
101 Off	49	28	BEL	13.02	BEL	4	0.2	BEL	4.70	2.23	4	0.1	BEL	0.06	BEL								
102 Off	49	28	BEL	23.84	2.34	4	0.2	0.31	1.13	0.73	4	0.1	BEL	BEL	BEL								
103 Off	51	28	BEL	41.49	1.26	4	0.2	0.41	0.94	0.62	4	0.1	BEL	BEL	BEL								
104 Off	51	28	BEL	28.63	0.02	12	0.5	BEL	1.62	0.31	12	0.4	BEL	1.35	BEL								
105 Off	51	28	BEL	24.85	BEL	4	0.2	BEL	0.25	0.07	4	0.1	BEL	0.61	BEL								
111 Off	49	28	BEL	14.07	BEL	4	0.2	BEL	0.68	0.15	4	0.1	BEL	0.35	BEL								
112 Off	51	28	BEL	10.53	BEL	4	0.2	BEL	0.07	BEL	4	0.1	BEL	0.34	BEL								
115 Off	51	28	BEL	7.51	BEL	4	0.2	BEL	0.05	BEL	4	0.1	BEL	BEL	BEL								
118 Off	51	28	BEL	13.68	BEL	4	0.2	0.04	0.53	0.26	4	0.1	BEL	BEL	BEL								
124 Off	51	28	BEL	26.57	3.41	12	0.5	0.72	2.90	1.55	12	0.4	BEL	0.45	BEL								
CLN Off	51	28	BEL	24.68	BEL	12	0.5	BEL	1.55	0.56	12	0.4	BEL	0.34	BEL								
N	555	11	0	11	4	68	11	4	11	9	68	11	0	7	0								
Min		28	BEL	7.51	0.02		0.2	0.04	0.05	0.07		0.1	BEL	0.06	BEL								
Max		28	BEL	41.49	3.41		0.5	0.72	4.70	2.23		0.4	BEL	1.35	BEL								
Median		28	--	23.84	1.80		0.2	0.36	0.94	0.56		0.1	--	0.35	--								
Mean		28	--	20.81	1.76		0.28	0.37	1.31	0.72		0.2	--	0.50	--								
StdDev		0	--	10.01	1.45		0.14	0.28	1.40	0.72		0.1	--	0.41	--								
EL					5.71					0.09					0.76								
Reference	BWXT 2001					Effluent intake concentration					2.28	Effluent intake concentration					4.08	Effluent intake concentration					0.17

**ATTACHMENT D**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001**  
 Page 34 of 38

Location <sup>b</sup>	<sup>228</sup> Th incremental concentration (10 <sup>-18</sup> μCi/ml)					<sup>230</sup> Th incremental concentration (10 <sup>-18</sup> μCi/ml)					<sup>232</sup> Th incremental concentration (10 <sup>-18</sup> μCi/ml)							
	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean			
213 On	12	1.0	BEL	22.54	7.43	12	1.3	BEL	24.83	9.02	12	0.5	BEL	22.11	6.60			
215T On	12	1.0	0.03	9.58	2.84	12	1.3	BEL	12.02	2.72	12	0.5	BEL	7.62	1.72			
216 On	12	1.0	BEL	8.82	4.57	12	1.3	BEL	13.59	5.51	12	0.5	BEL	11.04	4.10			
218 On	12	1.0	BEL	5.77	2.27	12	1.3	BEL	3.89	1.21	12	0.5	BEL	4.05	1.04			
N	48	4	1	4	4	48	4	0	4	4	48	4	0	4	4			
Min		1.0	0.03	5.77	2.27		1.3	BEL	3.89	1.21		0.5	BEL	4.05	1.04			
Max		1.0	0.03	22.54	7.43		1.3	BEL	24.83	9.02		0.5	BEL	22.11	6.60			
Median		1.0	--	9.20	3.71		1.3	--	12.81	4.12		0.5	--	9.33	2.91			
Mean		1.0	--	11.68	4.28		1.3	--	13.58	4.62		0.5	--	11.21	3.37			
StdDev		0.0	--	7.43	2.32		0.0	--	8.62	3.43		0.0	--	7.81	2.52			
124 Off	12	1.0	BEL	11.96	2.62	12	1.3	BEL	10.33	2.74	12	0.5	BEL	7.97	1.96			
N	12	1	0	1	1	12	1	0	1	1	12	1	0	1	1			
Min		1	BEL	11.96	2.62		1.3	BEL	10.33	2.74		0.5	BEL	7.97	1.96			
Max		1	BEL	11.96	2.62		1.3	BEL	10.33	2.74		0.5	BEL	7.97	1.96			
Median		--	--	--	--		--	--	--	--		--	--	--	--			
Mean		--	--	--	--		--	--	--	--		--	--	--	--			
StdDev		--	--	--	--		--	--	--	--		--	--	--	--			
EL					5.18					5.42					4.06			
	Effluent intake concentration					3.71	Effluent intake concentration					4.12	Effluent intake concentration					2.91

a. -- = no data; BEL = below environmental level; BRB = below reagent blank; EL = environmental (activity concentration) level; LDL = lower detection limit at 95% confidence level; ; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.  
 b. T indicates 2-m sampling height.

**ATTACHMENT D**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001**

Page 35 of 38

Table D-29. Mound air-monitoring data for 2001.<sup>a</sup>

Location <sup>d</sup>	HTO incremental concentration (10 <sup>-12</sup> µCi/ml)						<sup>238</sup> Pu incremental concentration (10 <sup>-18</sup> µCi/ml)						<sup>239,240</sup> Pu incremental concentration (10 <sup>-18</sup> µCi/ml)						
	Samples	LDL	Min	Max	Mean		Samples	LDL	Min	Max	Mean		Samples	LDL	Min	Max	Mean		
211 On	48	26	BEL	26.01	5.06		12	0.6	1.46	20.16	5.51		12	0.7	BEL	0.69	0.01		
213 On	50	23	BEL	44.09	7.61		12	0.6	1.26	121.73	15.19		12	0.7	BEL	1.62	BEL		
214 On	51	23	BEL	24.72	4.60		12	0.6	0.72	5.69	2.90		12	0.7	BEL	0.70	BEL		
215 On	51	23	BEL	30.61	2.82		11	0.6	BRB	4.50	1.61		11	0.7	BEL	1.85	0.2		
215T On	--	--	--	--	--		12	0.6	0.24	5.74	1.62		12	0.7	BEL	1.64	BEL		
216 On	49	23	BEL	52.39	5.24		12	0.6	0.39	22.27	5.58		12	0.7	BEL	0.51	0.03		
218 On	49	23	BEL	48.81	2.98		12	0.6	0.96	7.01	4.01		12	0.7	BEL	1.09	BEL		
N	298	6	0	6	6		83	7	6	7	7		83	7	0	7	3		
Min		23	BEL	24.72	2.82			0.6	0.24	4.50	1.61			0.7	BEL	0.51	0.01		
Max		26	BEL	52.39	7.61			0.6	1.46	121.73	15.19			0.7	BEL	1.85	0.2		
Median		23	--	37.35	<b>4.83</b>			0.6	0.84	7.01	4.01			0.7	--	1.09	0.03		
Mean		23.5	--	37.77	4.72			0.6	0.84	26.73	5.20			0.7	--	1.16	0.08		
StdDev		1.2	--	12.13	1.75			0.0	0.48	42.53	4.70			0.0	--	0.5	0.1		
101 Off	51	15	BEL	37.24	3.99		4	0.1	BRB	0.20	0.09		4	0.1	BEL	0.49	BEL		
102 Off	49	15	BEL	64.72	6.09		4	0.1	0.25	0.40	0.32		4	0.1	BEL	0.15	BEL		
103 Off	51	15	BEL	63.13	4.76		4	0.1	0.46	5.55	1.91		4	0.1	BEL	0.17	BEL		
104 Off	51	15	BEL	19.57	1.33		12	0.6	BRB	1.44	0.25		12	0.7	BEL	0.61	BEL		
105 Off	50	15	BEL	20.50	0.28		4	0.1	0.02	0.12	0.06		4	0.1	BEL	1.40	0.17		
111 Off	34	15	BEL	5.56	BEL		4	0.1	BRB	0.29	0.09		4	0.1	BEL	1.17	0.11		
112 Off	51	15	BEL	27.65	0.83		4	0.1	BRB	0.08	BRB		4	0.1	BEL	1.56	0.38		
115 Off	51	15	BEL	12.72	BEL		4	0.1	BRB	0.04	0.01		4	0.1	BEL	1.17	0.26		
118 Off	50	15	BEL	34.08	0.17		4	0.1	BRB	0.30	0.14		4	0.1	BEL	0.53	0.05		
124 Off	48	15	BEL	76.74	7.28		12	0.6	0.22	2.45	1.32		12	0.7	BEL	0.49	0.003		
CLN Off	49	15	BEL	30.32	3.91		11	0.6	0.10	2.11	0.91		11	0.7	BEL	0.90	0.11		
212 Off	51	23	BEL	75.94	9.79		12	0.6	0.61	4.57	1.56		12	0.7	BEL	0.56	BEL		
217 Off	42	23	BEL	19.28	1.88		11	0.6	0.01	1.55	0.40		11	0.7	BEL	1.09	0.04		
N	628	13	0	13	11		90	13	7	13	12		90	13	0	13	8		
Min		15	BEL	5.56	0.17			0.1	0.01	0.04	0.01			0.1	BEL	0.15	0.00		
Max		23	BEL	76.74	9.79			0.6	0.61	5.55	1.91			0.7	BEL	1.56	0.38		
Median		15	--	30.32	3.91			0.1	0.22	0.40	0.29			0.1	--	0.61	0.11		
Mean		16.2	--	37.50	3.66			0.29	0.24	1.47	0.59			0.33	--	0.79	0.14		
StdDev		3.0	--	25.19	3.38			0.25	0.25	1.89	0.71			0.30	--	0.44	0.13		
EL					2.5						BRB							0.4	
Reference	BWXT 2002						Effluent intake concentration					4.01		Effluent intake concentration					0.03
						4.83													

**ATTACHMENT D**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001**  
 Page 36 of 38

Location <sup>b</sup>	<sup>228</sup> Th incremental concentration (10 <sup>-18</sup> μCi/ml)					<sup>230</sup> Th incremental concentration (10 <sup>-18</sup> μCi/ml)					<sup>232</sup> Th incremental concentration (10 <sup>-18</sup> μCi/ml)							
	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean			
213 On	12	0.8	BEL	20.97	4.01	12	1.5	BEL	20.99	3.91	12	0.4	BEL	14.31	2.82			
215T On	12	0.8	BEL	13.56	3.29	12	1.5	BEL	9.69	2.80	12	0.4	BEL	7.00	2.13			
216 On	12	0.8	BEL	12.48	4.30	12	1.5	BEL	9.74	3.28	12	0.4	BEL	8.15	2.37			
218 On	12	0.8	BEL	12.05	3.56	12	1.5	BEL	14.52	2.17	12	0.4	BEL	11.01	1.67			
N	48	4	0	4	4	48	4	0	4	4	48	4	0	4	4			
Min		0.8	BEL	12.05	3.29		1.5	BEL	9.69	2.17		0.4	BEL	7.00	1.67			
Max		0.8	BEL	20.97	4.30		1.5	BEL	20.99	3.91		0.4	BEL	14.31	2.82			
Median		0.8	--	13.02	3.79		1.5	--	12.13	3.04		0.4	--	9.58	2.25			
Mean		0.8	--	14.77	3.79		1.5	--	13.74	3.04		0.4	--	10.12	2.25			
StdDev		0.0	--	4.19	0.45		0.0	--	5.34	0.74		0.0	--	3.26	0.48			
124 Off	12	0.8	BEL	12.35	1.67	12	1.5	BEL	11.77	0.95	12	0.4	BEL	9.97	0.94			
N	12	1	0	1	1	12	1	0	1	1	12	1	0	1	1			
Min		0.8	BEL	12.35	1.67		1.5	BEL	11.77	0.95		0.4	BEL	9.97	0.94			
Max		0.8	BEL	12.35	1.67		1.5	BEL	11.77	0.95		0.4	BEL	9.97	0.94			
Median		--	--	--	--		--	--	--	--		--	--	--	--			
Mean		--	--	--	--		--	--	--	--		--	--	--	--			
StdDev		--	--	--	--		--	--	--	--		--	--	--	--			
EL					5.2					6.39					4.56			
	Effluent intake concentration					3.79	Effluent intake concentration					3.04	Effluent intake concentration					2.25

a. -- = no data; BEL = below environmental level; BRB = below reagent blank; EL = environmental (activity concentration) level; LDL = lower detection limit at 95% confidence level; ; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.  
 b. T indicates 2-m sampling height.

**ATTACHMENT D**  
**MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001**  
Page 37 of 38

Table D-30. Mound air-monitoring data for 2002.<sup>a</sup>

Location <sup>b</sup>	HTO incremental concentration (10 <sup>-12</sup> µCi/ml)					<sup>238</sup> Pu incremental concentration (10 <sup>-18</sup> µCi/ml)					<sup>239,240</sup> Pu incremental concentration (10 <sup>-18</sup> µCi/ml)				
	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean
211 On	31	31	BEL	24.12	4.10	12	0.6	0.98	9.05	3.06	12	0.6	BEL	0.75	0.11
213 On	50	28	BEL	26.94	4.83	12	0.6	1.41	13.85	4.92	12	0.6	BEL	1.58	0.30
214 On	29	48	BEL	60.18	2.89	12	0.6	0.48	61.48	9.37	12	0.6	BEL	1.69	0.27
215 On	50	48	BEL	134.45	11.31	12	0.6	0.21	11.37	2.11	12	0.6	BEL	1.36	0.19
215T On	--	--	--	--	--	12	0.6	0.24	8.38	2.18	12	0.6	BEL	1.11	0.19
216 On	49	48	BEL	38.04	2.09	12	0.6	0.79	11.88	3.76	12	0.6	BEL	1.71	0.33
218 On	51	28	BEL	32.31	1.60	12	0.6	0.07	26.31	5.08	12	0.6	BEL	0.73	0.19
N	260	6		6	6	84	7	7	7	7	84	7		7	7
Min		28	BEL	24.12	1.60			0.07	8.38	2.11			BEL	0.73	0.11
Max		48	BEL	134.45	11.31			1.41	26.31	9.37			BEL	1.69	0.33
Median					<b>3.50</b>					3.76					0.19
Mean					4.72					4.28					0.23
101 Off	50	48	BEL	64.75	3.96	4	0.2	BRB	0.20	0.07	4	0.1	BEL	BEL	BEL
102 Off	50	48	BEL	52.54	6.14	4	0.2	0.29	1.76	0.77	4	0.1	BEL	0.35	BEL
103 Off	50	48	BEL	104.05	3.42	4	0.2	0.29	0.53	0.41	4	0.1	BEL	0.15	BEL
104 Off	49	48	BEL	42.04	0.11	12	0.6	BRB	1.73	0.33	12	0.7	BEL	0.68	0.18
105 Off	50	48	BEL	26.67	BEL	4	0.2	BRB	0.15	0.04	4	0.1	BEL	BEL	BEL
111 Off	50	48	BEL	21.38	BEL	4	0.2	BRB	0.09	0.01	4	0.1	BEL	BEL	BEL
112 Off	48	48	BEL	16.78	BEL	4	0.2	BRB	0.05	BRB	4	0.1	BEL	BEL	BEL
115 Off	49	48	BEL	15.93	BEL	4	0.2	BRB	0.08	BRB	4	0.1	BEL	BEL	BEL
118 Off	50	48	BEL	44.59	0.54	4	0.2	0.05	0.38	0.17	4	0.1	BEL	0.14	0.05
124 Off	49	48	BEL	79.09	6.69	12	0.6	BRB	2.68	1.10	12	0.6	BEL	0.25	BEL
CLN Off	50	48	BEL	46.55	2.23	12	0.6	0.08	2.02	0.63	12	0.6	BEL	0.84	0.13
212 Off	29	48	BEL	226.74	13.14	12	0.6	0.23	4.29	1.57	12	0.6	BEL	1.03	0.20
217 Off	29	48	BEL	29.94	0.13	12	0.6	BRB	1.68	0.27	12	0.6	BEL	0.83	0.19
N	603	13	13	13	13	92	13	13	13	13	90	13	13	13	13
Min		15	BEL	15.93	BEL		0.2	0.05	0.05	BRB		0.1	BEL	0.15	BEL
Max		23	BEL	226.74	13.14		0.6	0.29	4.29	1.57		0.6	BEL	0.14	0.20
Median															
Mean															
EL					7.38					BRB					0.27
Reference	BWXT 2002														
				Effluent intake concentration	3.50				Effluent intake concentration	3.76				Effluent intake concentration	0.19



**ATTACHMENT D  
MOUND ENVIRONMENTAL AIR-SAMPLING DATA FOR 1973 TO 2001**  
Page 38 of 38

Location <sup>b</sup>	<sup>228</sup> Th incremental concentration (10 <sup>-18</sup> μCi/ml)					<sup>230</sup> Th incremental concentration (10 <sup>-18</sup> μCi/ml)					<sup>232</sup> Th incremental concentration (10 <sup>-18</sup> μCi/ml)							
	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean	Samples	LDL	Min	Max	Mean			
213 On	12	0.7	BEL	6.43	BEL	12	1.3	BEL	0.52	BEL	12	0.5	BEL	5.46	BEL			
215T On	12	0.7	BEL	2.91	BEL	12	1.3	BEL	2.74	BEL	12	0.5	BEL	3.22	BEL			
216 On	12	0.7	BEL	9.39	BEL	12	1.3	BEL	3.67	BEL	12	0.5	BEL	6.72	BEL			
218 On	12	0.7	BEL	27.42	0.55	12	1.3	BEL	18.50	BEL	12	0.5	BEL	23.34	0.30			
N	48	4	4	4	4	48	4	4	4	4	48	4	4	4	4			
Min			BEL	2.92	BEL			BEL	0.52	BEL				3.22	BEL			
Max			BEL	27.42	0.55			BEL	18.50	BEL				23.34	0.30			
Median					0					0.00					0			
Mean					0.14					0.00					0.075			
124 Off	12		BEL	1.99	BEL	12	1	BEL	BEL	BEL	12	0.4	BEL	2.05	BEL			
N	12		1	1	1	12	1	1	1	1	12	1	0	1	1			
Min		0.7	BEL	1.99	1.67			BEL	BEL	BEL		0.4	BEL	2.05	BEL			
Max		0.7	BEL	1.99	1.67			BEL	BEL	BEL		0.4	BEL	2.05	BEL			
Median							--	--	--	--		--	--	--	--			
Mean							--	--	--	--		--	--	--	--			
StdDev							--	--	--	--		--	--	--	--			
EL					10.01					14.17					4.56			
	Effluent intake concentration					0.00	Effluent intake concentration					0.00	Effluent intake concentration					0.00

- a. -- = no data; BEL = below environmental level; BRB = below reagent blank; EL = environmental (activity concentration) level; LDL = lower detection limit at 95% confidence level; ; Min = minimum; Max = maximum; N = number of samples; StdDev = standard deviation.
- b. T indicates 2-m sampling height.